



ACOUSTIC SOLUTIONS

When working with our clients we often came across that they had a need for their lighting solutions to offer acoustic properties or to cohesively flow with their bespoke lighting solutions. JPR Lighting have since created a fully adaptable acoustic offering that can be tailored to meet your exact project requirements.



FULLY BESPOKE ACOUSTIC SOLUTIONS







ILLUMINATED ACOUSTIC RANGE


Reference: AC+LED 01



Illuminated acoustic range. Fully adaptable to suit your requirements.

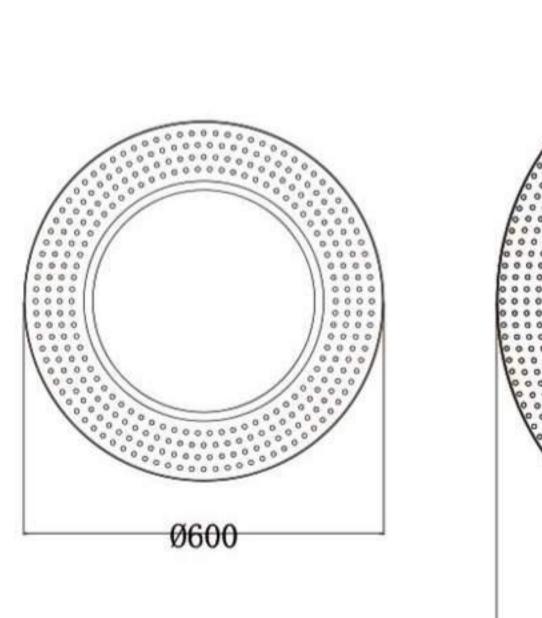

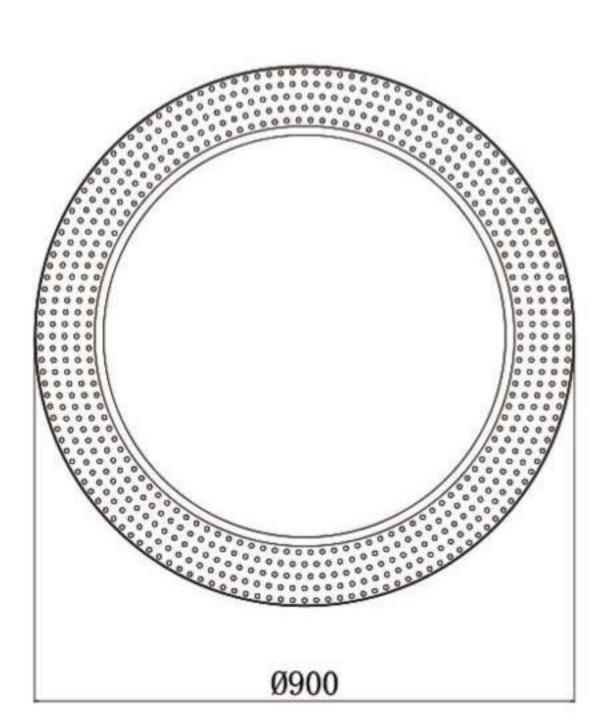

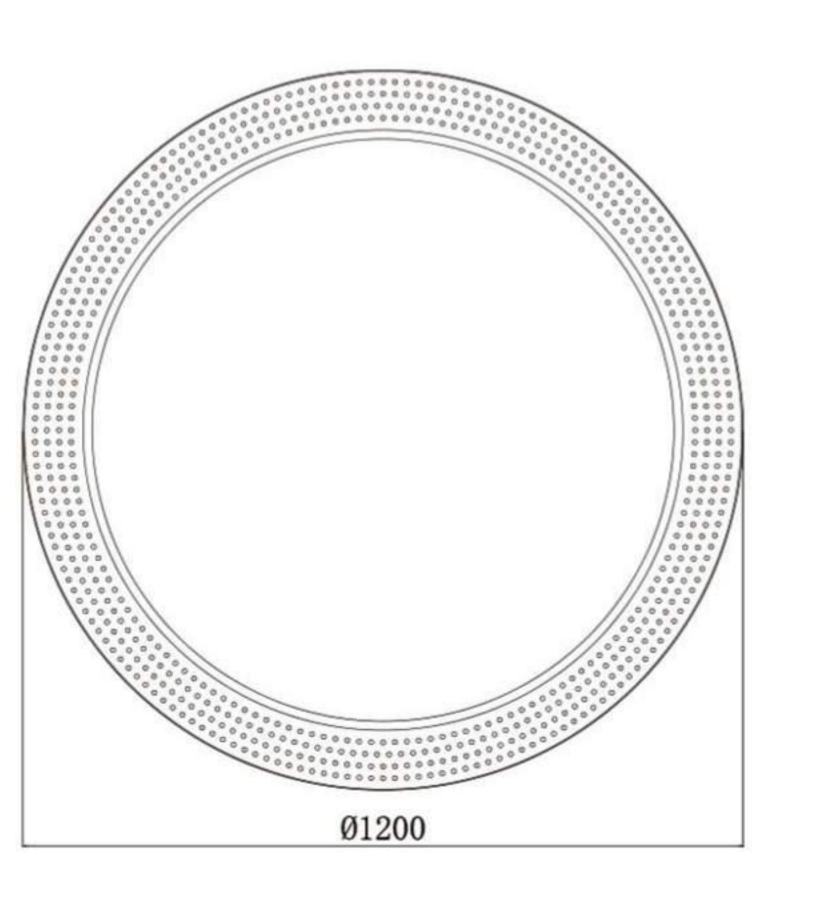


Dimension	Dia.600mm (23.62")	Dia.900mm (35.43")	Dia. 1200mm (47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	3.7kg	7kg	11.5kg
Lifespan		50,000 Hours	
Power	28W	60W	91W
Input		AC110 / 220 / 277V	
Lighting Output	2000 lm	4200 lm	6400 lm
3 CCT Options	Warm White 2800-3200K Bright White 3700-4200K Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 02



Illuminated acoustic range. Fully adaptable to suit your requirements.

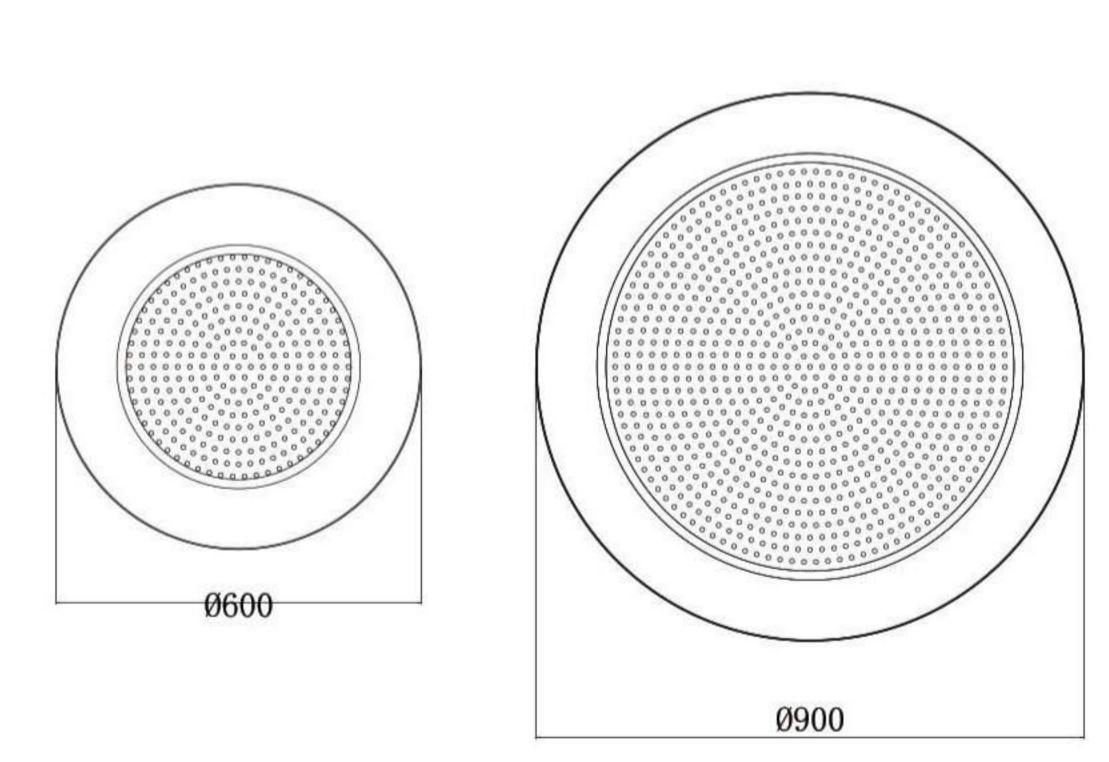

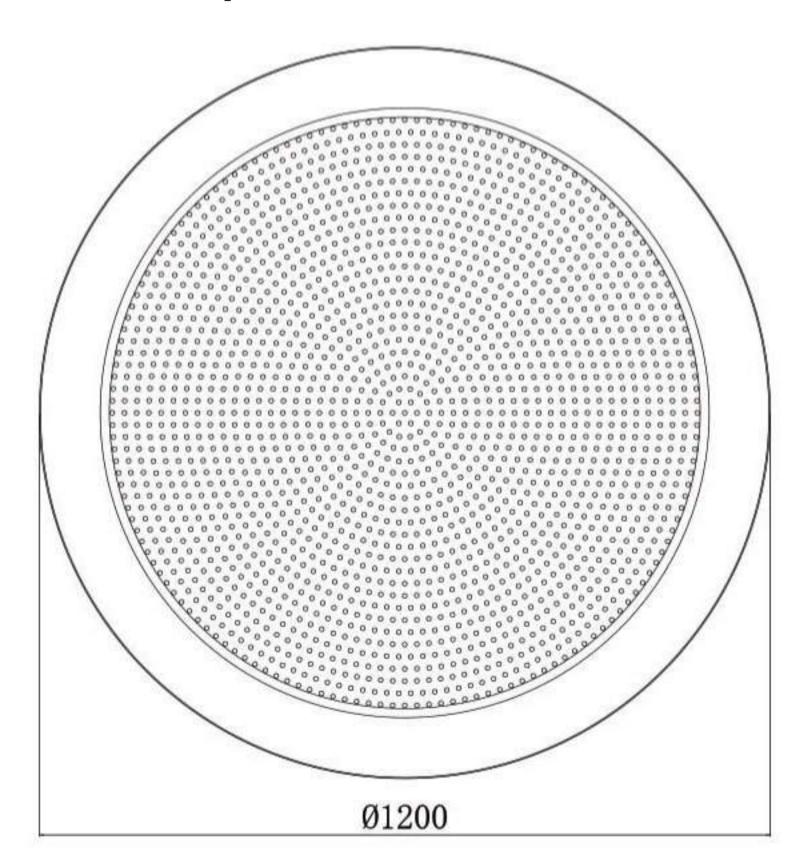

Dimension	Dia.600mm (23.62")	Dia.900mm (35.43")	Dia. 1200mm (47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	5 kg	8.8 kg	13 kg
Lifespan		50,000 Hours	
Power	28W	42W	56W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	3000 lm	4000 lm
3 CCT Options	Warm White 2800-3200K Bright White 3700-4200K Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


ILLUMINATED ACOUSTIC RANGE


Reference: AC+LED 03



Illuminated acoustic range. Fully adaptable to suit your requirements.

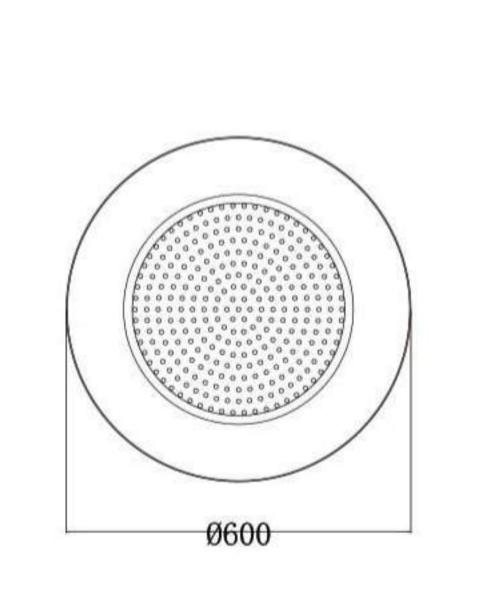

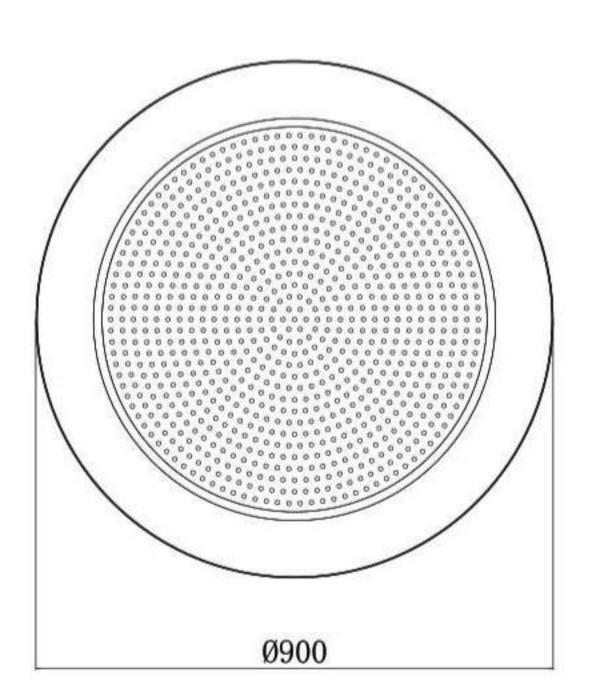

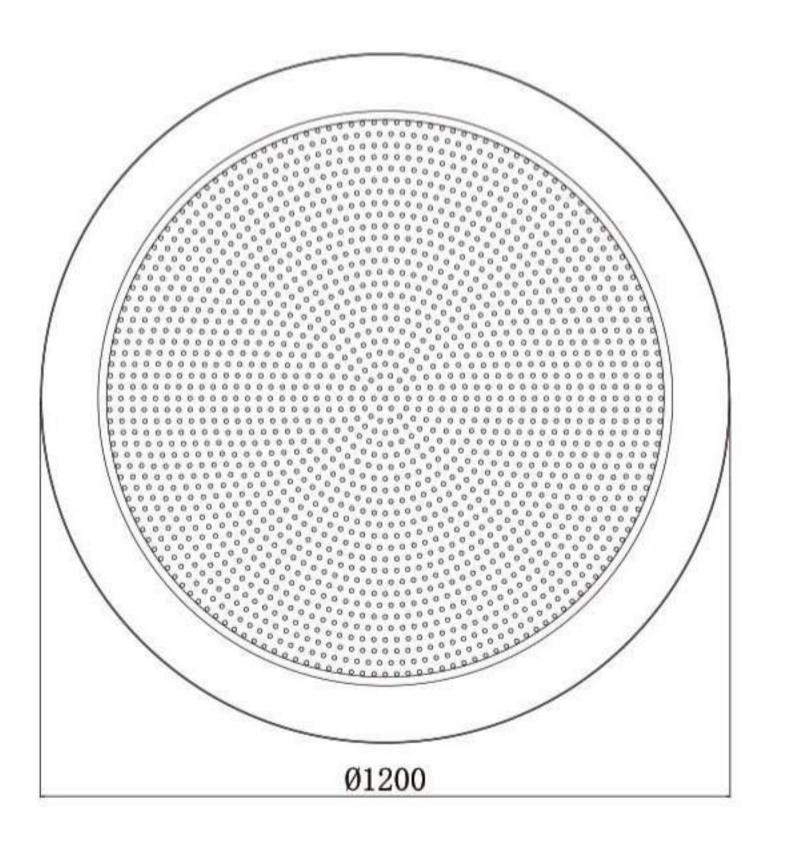


Dimension	Dia.600mm (23.62")	Dia.900mm (35.43")	Dia. 1200mm (47.24")	
Luminaire Height	88 mm(3.46")			
Product Weight	5 kg	8.8 kg	13 kg	
Lifespan		50,000 Hours		
Power	28W	42W	56W	
Input	AC110 / 220 / 277V			
Lighting Output	2000 lm	3000 lm	4000 lm	
3 CCT Options	Warm White 2800-3200K Bright White 3700-4200K Daylight 5600~6500K			
Dimmable	Optional			
Intelligent Control	Optional			
Warranty	3 Years			

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 04



Illuminated acoustic range. Fully adaptable to suit your requirements.

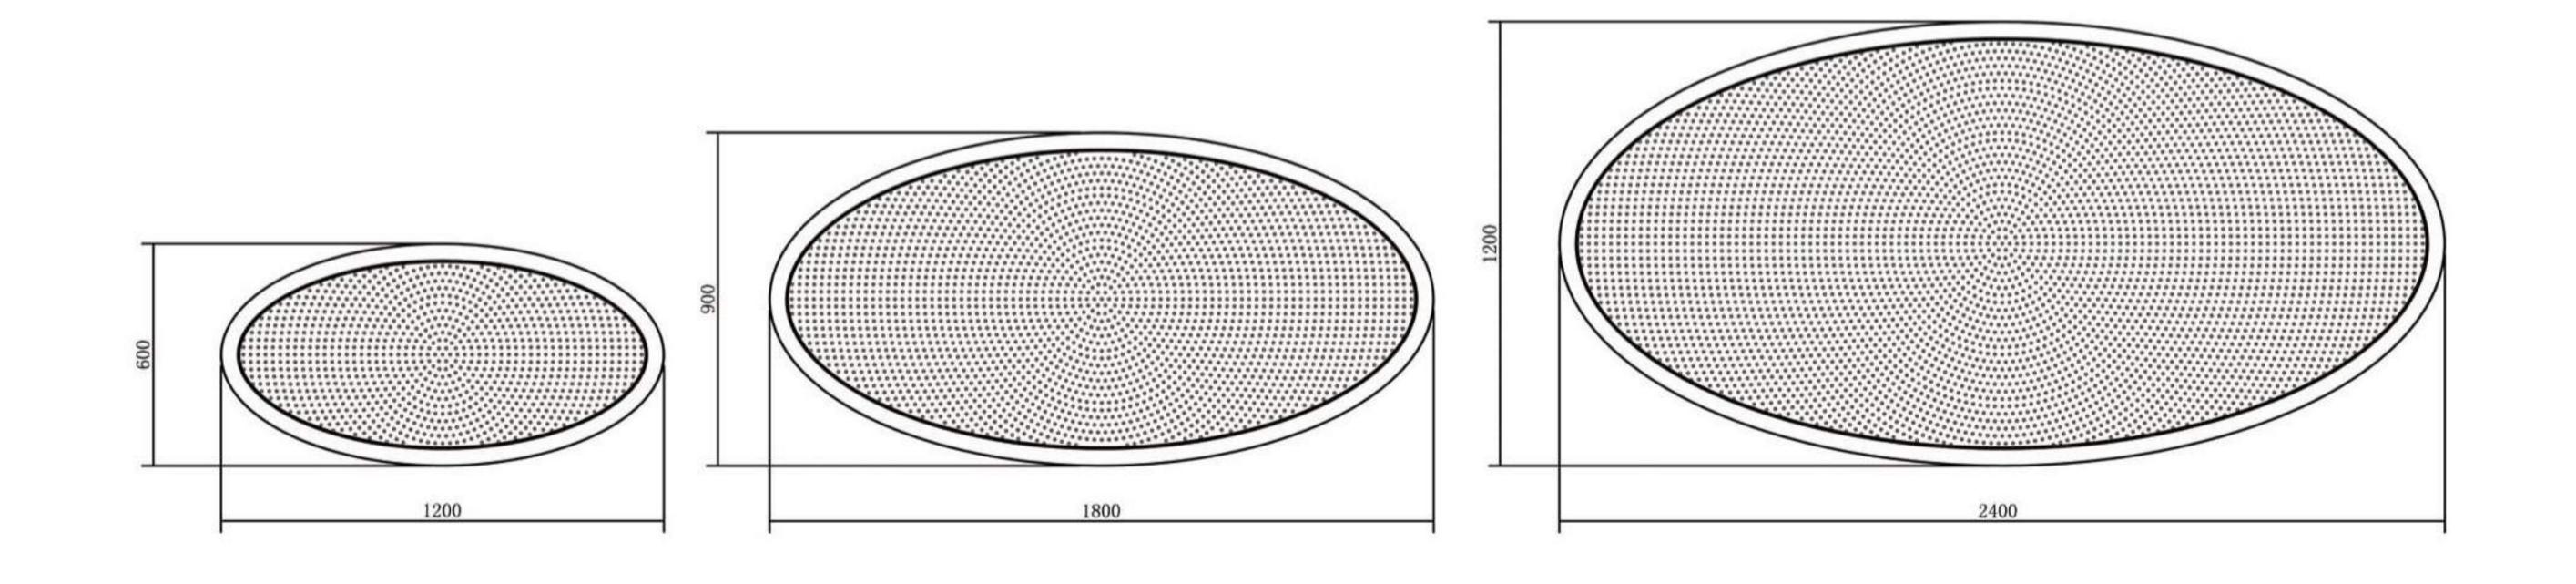

Dimension	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm	
	(23.62" x 47.24")	(35.43" x 70.86")	(47.24 "x 94.48")	
Luminaire Height		88 mm(3.46")		
Product Weight	6.5 kg	9 kg	18.5 kg	
Lifespan		50,000 Hours		
Power	42W	60W	91W	
Input	AC110 / 220 / 277V			
Lighting Output	3000 lm	4200 lm	6400 lm	
	Warm White 2800-3200K			
3 CCT Options	E	3right White 3700-4200	K	
		Daylight 5600~6500K		
Dimmable	Optional			
Intelligent Control	Optional			
Warranty		3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 05



Illuminated acoustic range. Fully adaptable to suit your requirements.

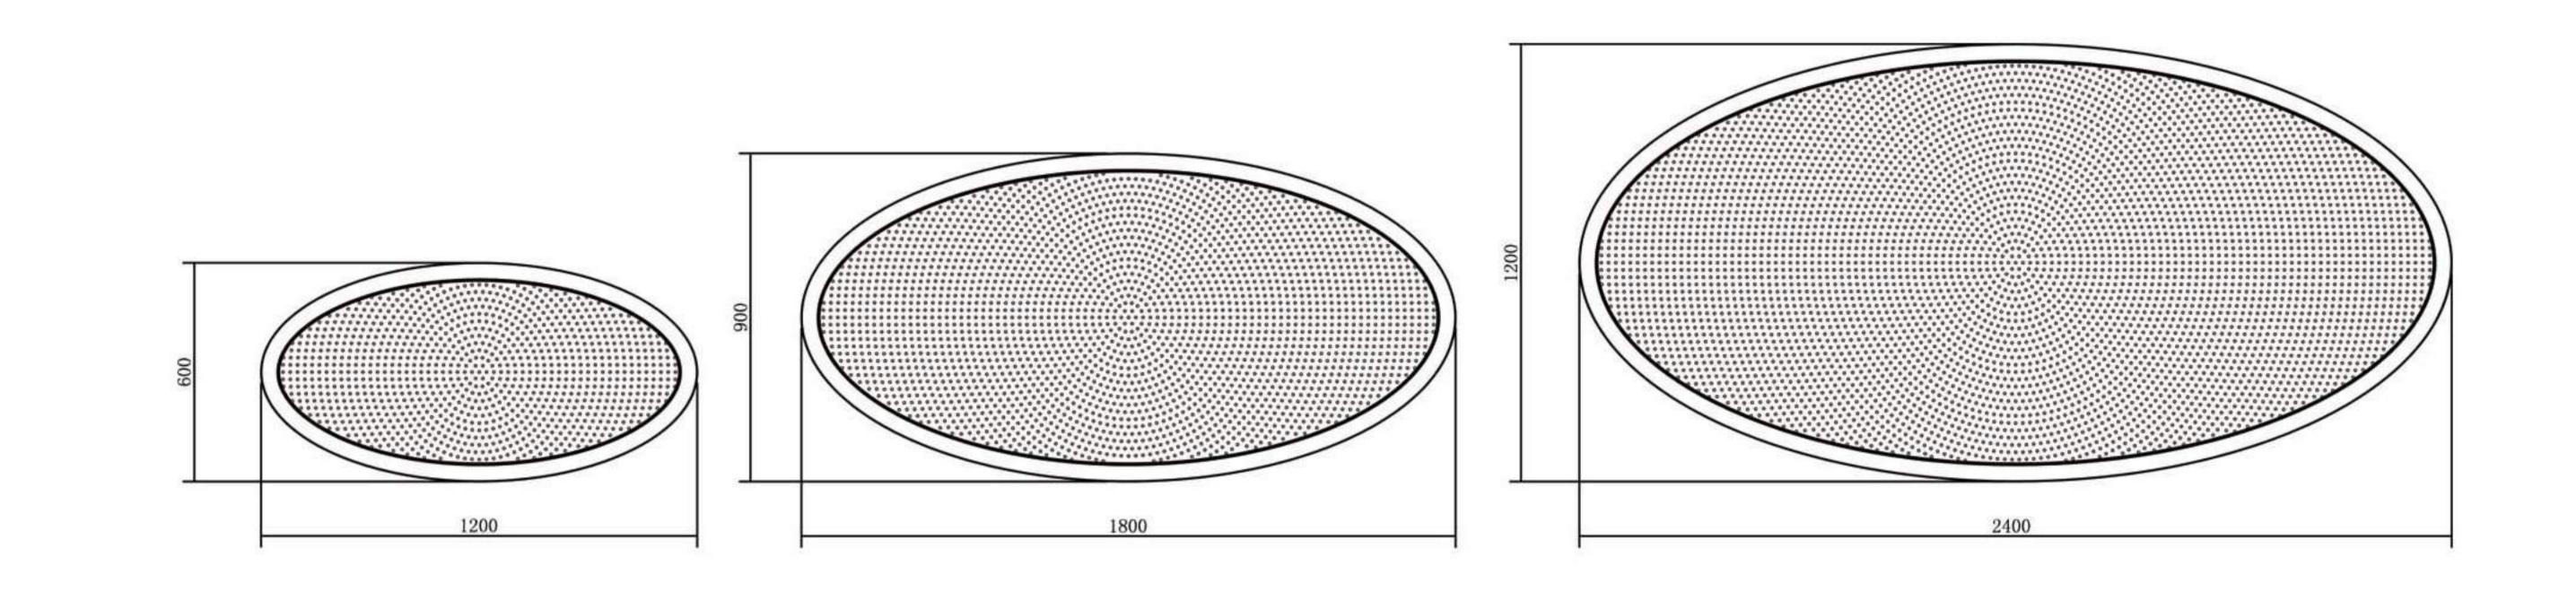


Dimension	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm
Difficition	(23.62" x 47.24")	(35.43" x 70.86")	(47.24 "x 94.48")
Luminaire Height		88 mm(3.46")	
Product Weight	6.5 kg	9 kg	18.5 kg
Lifespan		50,000 Hours	
Power	42W	60W	91W
Input	AC110 / 220 / 277V		
Lighting Output	3000 lm	4200 lm	6400 lm
	Warm White 2800-3200K		
3 CCT Options	В	right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 06



Illuminated acoustic range. Fully adaptable to suit your requirements.

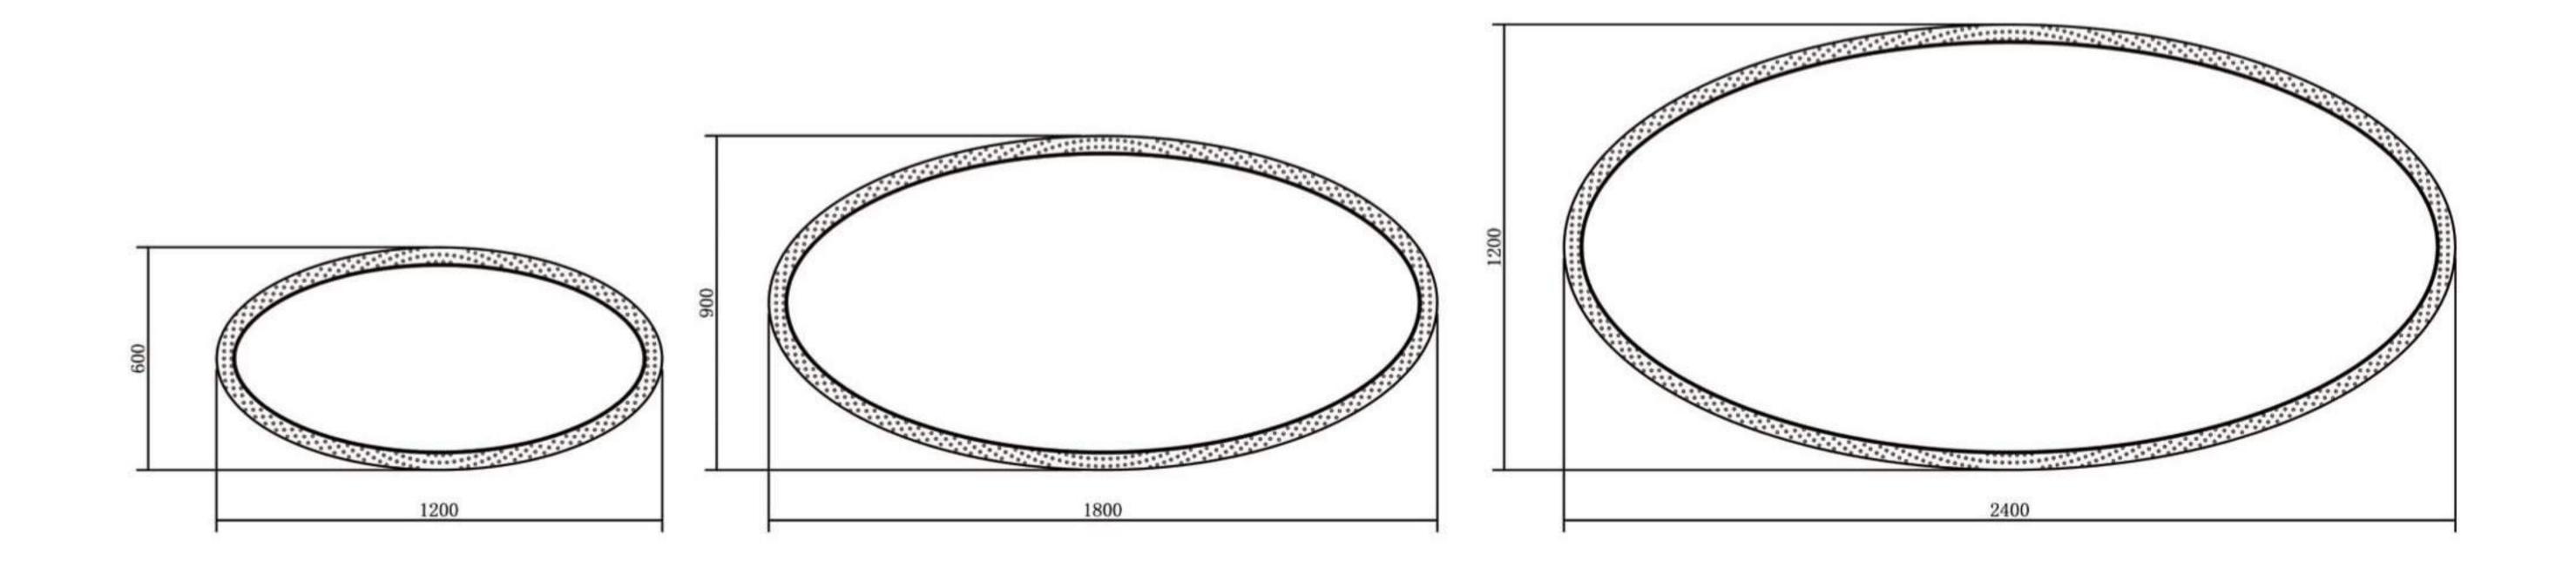

Dimension	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm
	(23.62" x 47.24")	(35.43 "x 70.86")	(47.24" x 94.48")
Luminaire Height	88 mm(3.46")		
Product Weight	6.5 kg	13 kg	22 kg
Lifespan		50,000 Hours	
Power	66W	115W	200W
Input	AC110 / 220 / 277V		
Lighting Output	4600 lm	8000 lm	14000 lm
	Warm White 2800-3200K		
3 CCT Options	В	3700-4200 Sright White	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 07



Illuminated acoustic range. Fully adaptable to suit your requirements.

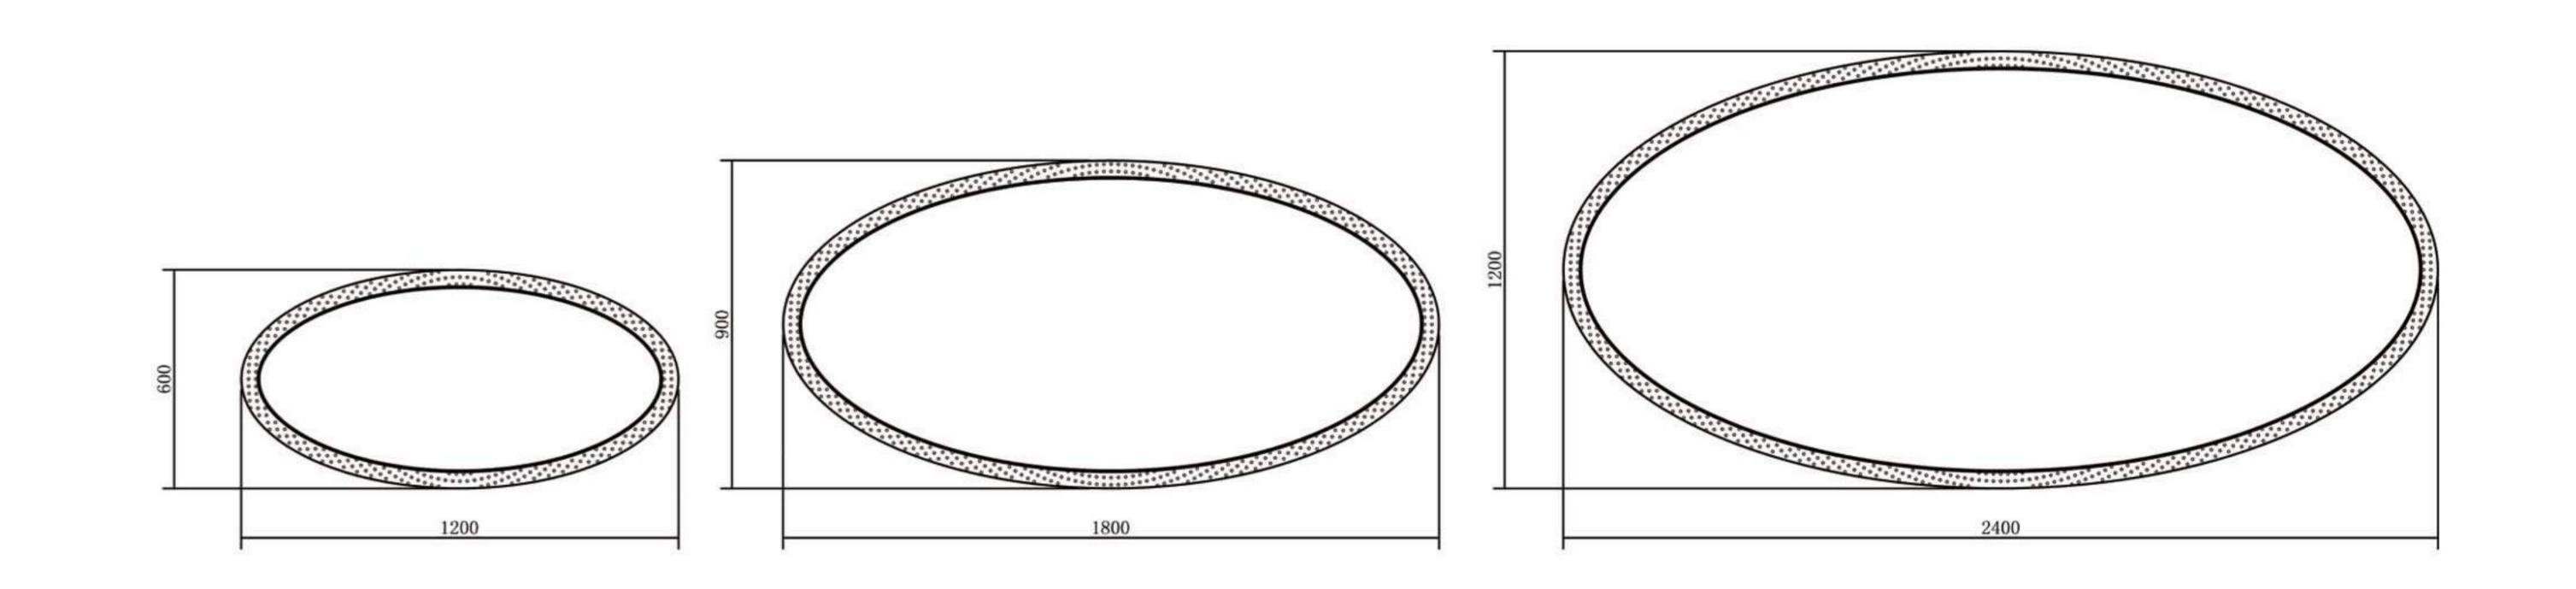


Dimension	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm
Difficition	(23.62" x 47.24")	(35.43" x 70.86")	(47.24" x 94.48")
Luminaire Height		88 mm(3.46")	
Product Weight	6.5 kg	13 kg	22 kg
Lifespan		50,000 Hours	
Power	66W	115W	200W
Input	AC110 / 220 / 277V		
Lighting Output	4600 lm	8000 lm	14000 lm
	Warm White 2800-3200K		
3 CCT Options	В	3700-4200 Sright White	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 08



Illuminated acoustic range. Fully adaptable to suit your requirements.

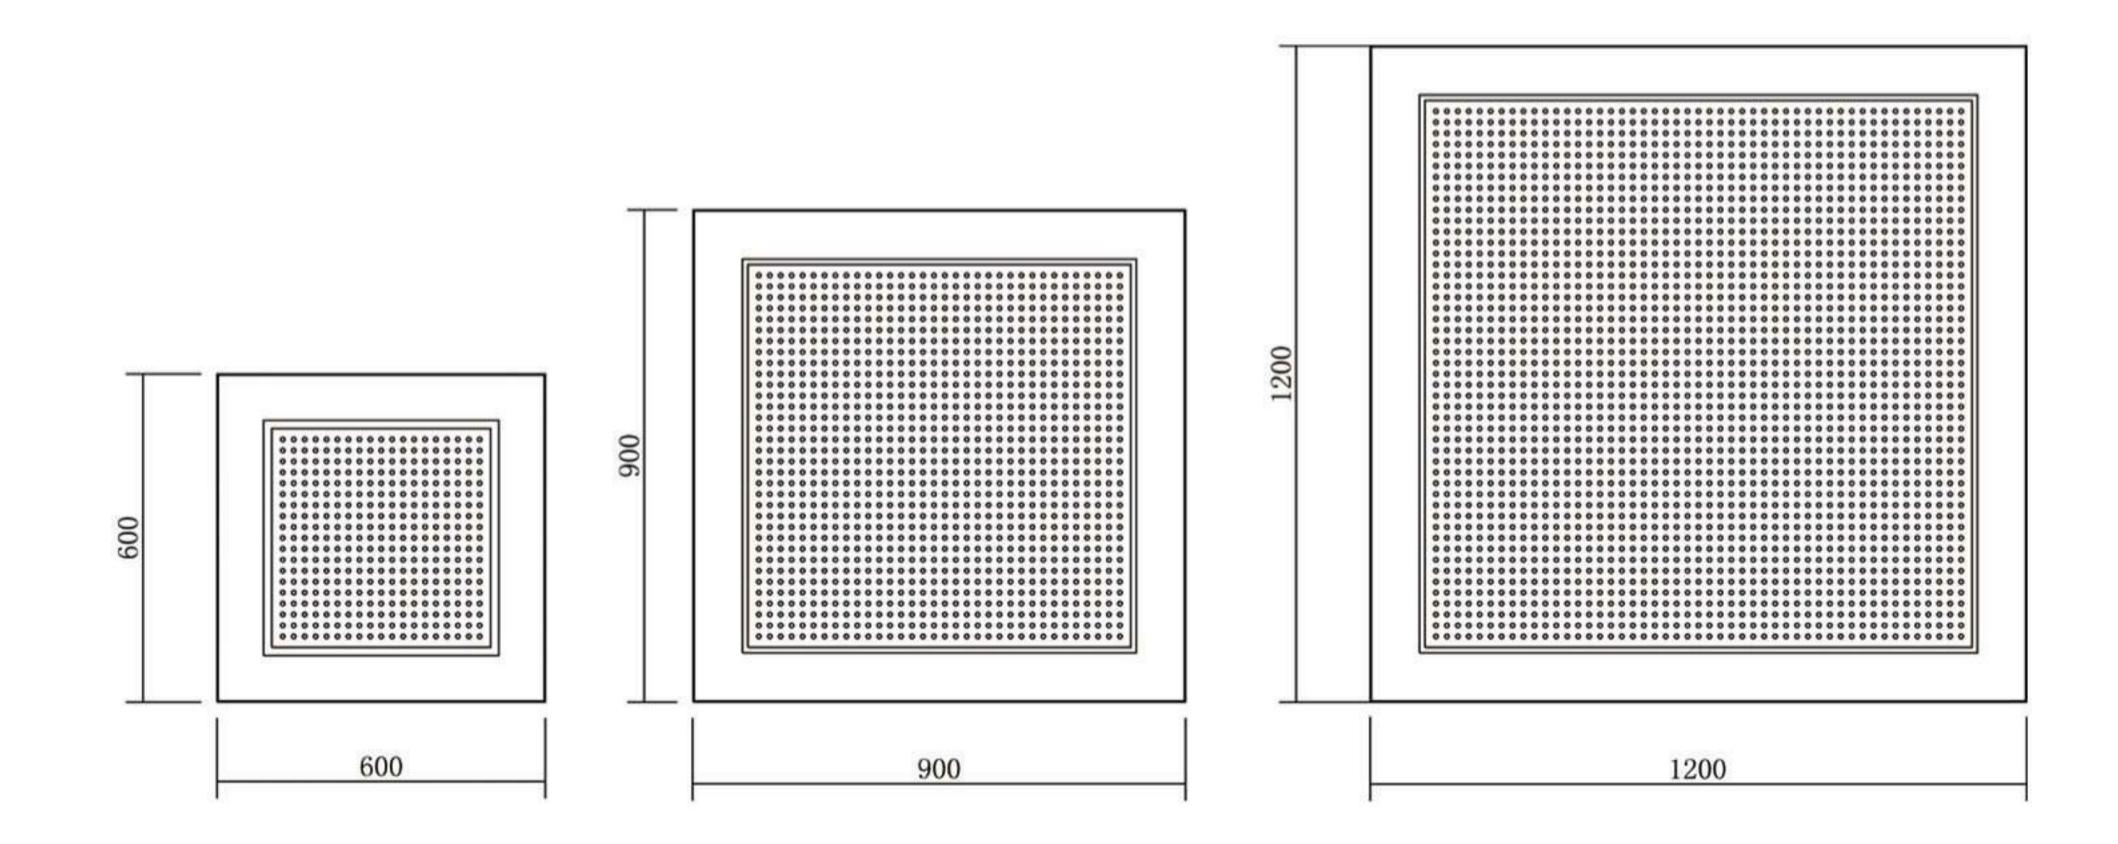

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
	(23.6 "x 23.6")	(35.43 "x 35.43")	(47.24" x 47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	5kg	7.5kg	12.5kg
Lifespan		50,000 Hours	
Power	35W	56W	70W
Input		AC110 / 220 / 277V	
Lighting Output	2500 lm	4000 lm	5000 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 09



Illuminated acoustic range. Fully adaptable to suit your requirements.

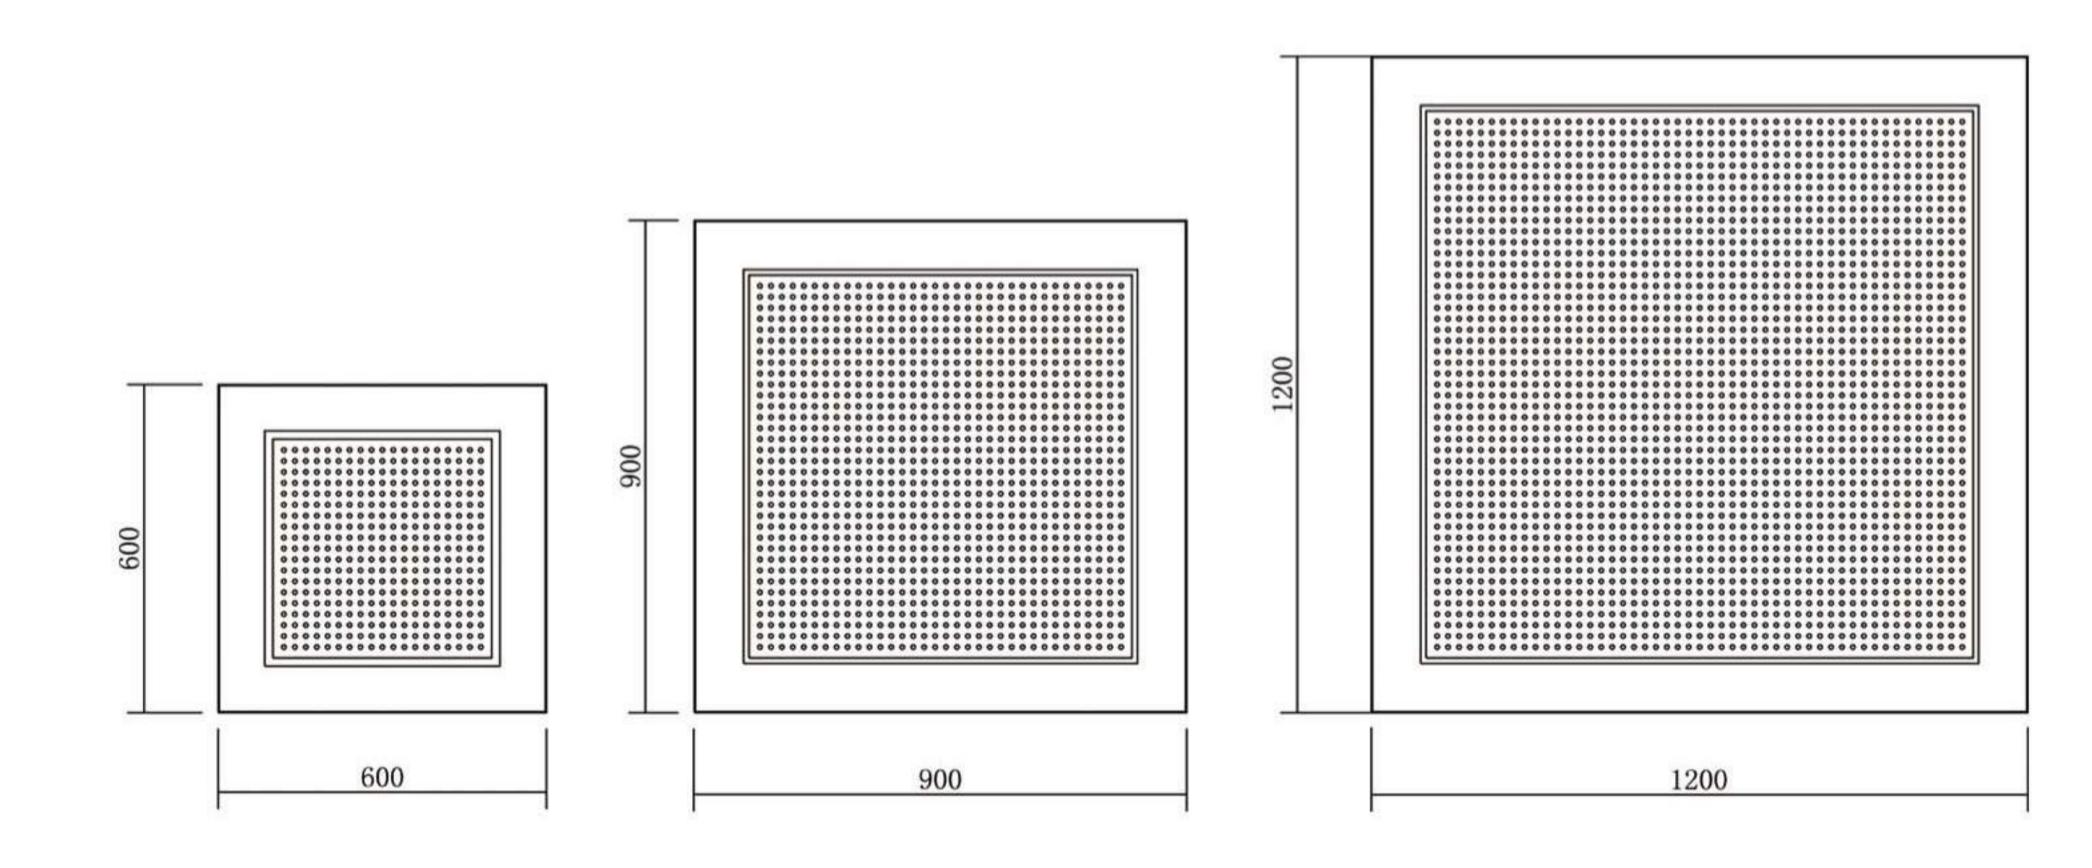


Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
	(23.6" x 23.6")	(35.43 "x 35.43")	(47.24 "x 47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	5 kg	7.5 kg	12.5 kg
Lifespan		50,000 Hours	
Power	35W	56W	70W
Input	AC110 / 220 / 277V		
Lighting Output	2500 lm	4000 lm	5000 lm
	Warm White 2800-3200K		
3 CCT Options		3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 10



Illuminated acoustic range. Fully adaptable to suit your requirements.

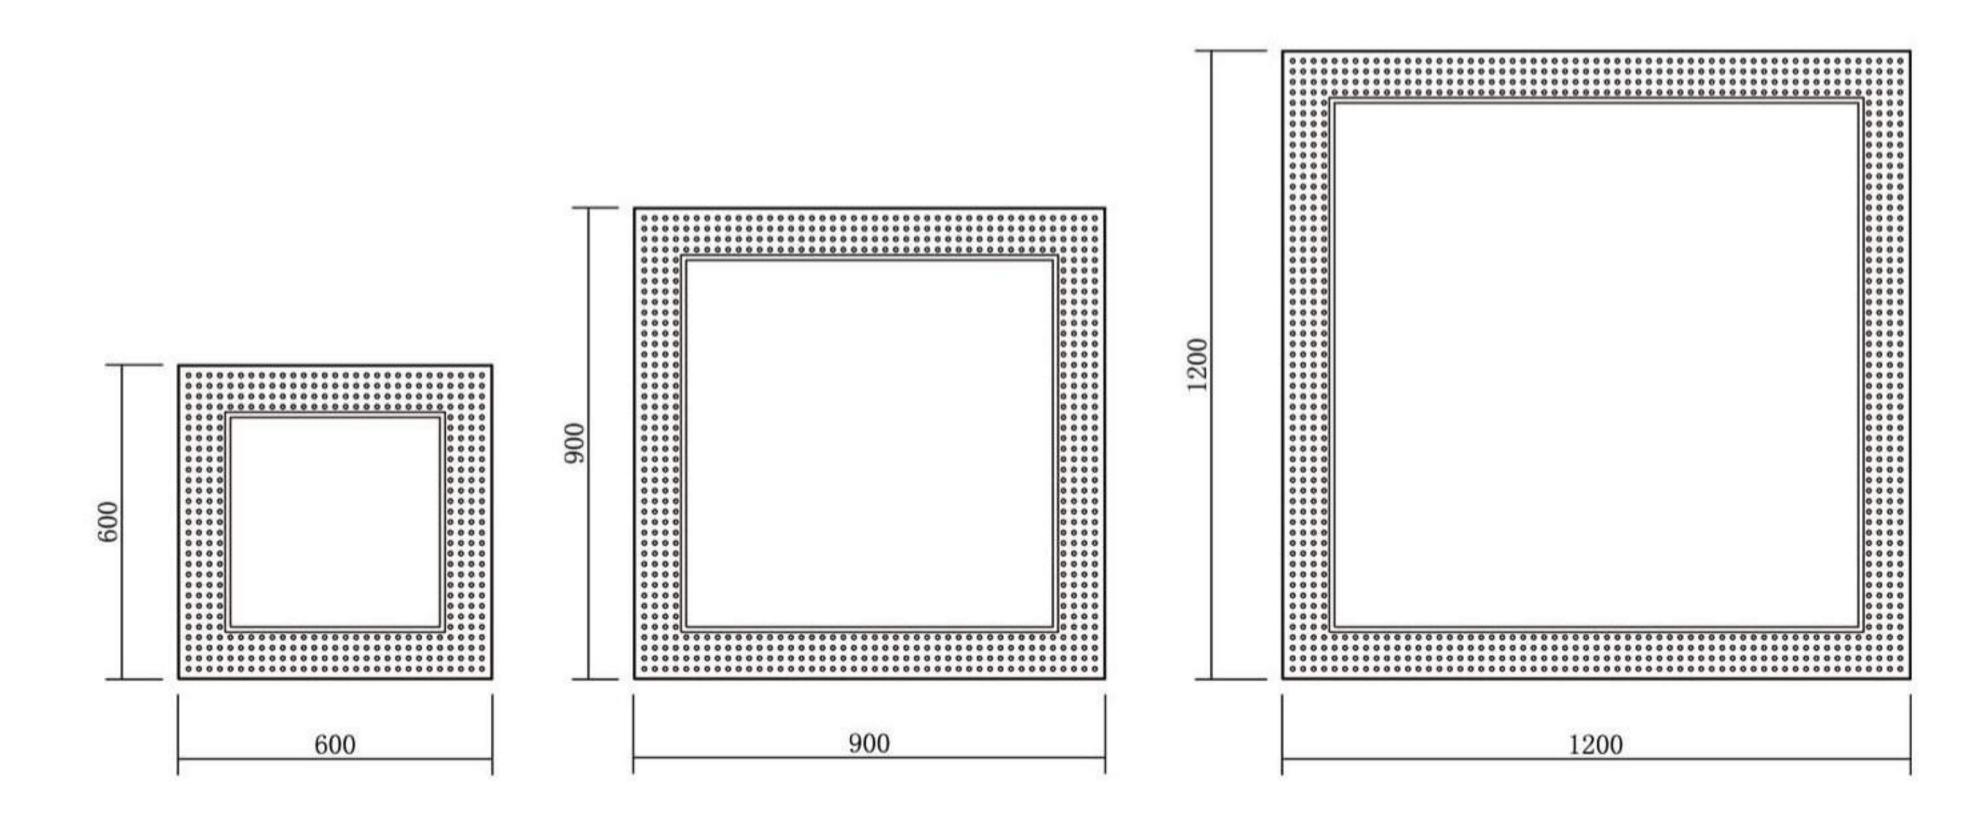

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
Difficusion	(23.6" x 23.6")	(35.43" x 35.43")	(47.24" x 47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	5kg	9kg	15kg
Lifespan		50,000 Hours	
Power	38W	80W	108W
Input		AC110 / 220 / 277V	
Lighting Output	2700 lm	5600 lm	7600 lm
	Warm White 2800-3200K		
3 CCT Options	E	Bright White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion - Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 11



Illuminated acoustic range. Fully adaptable to suit your requirements.

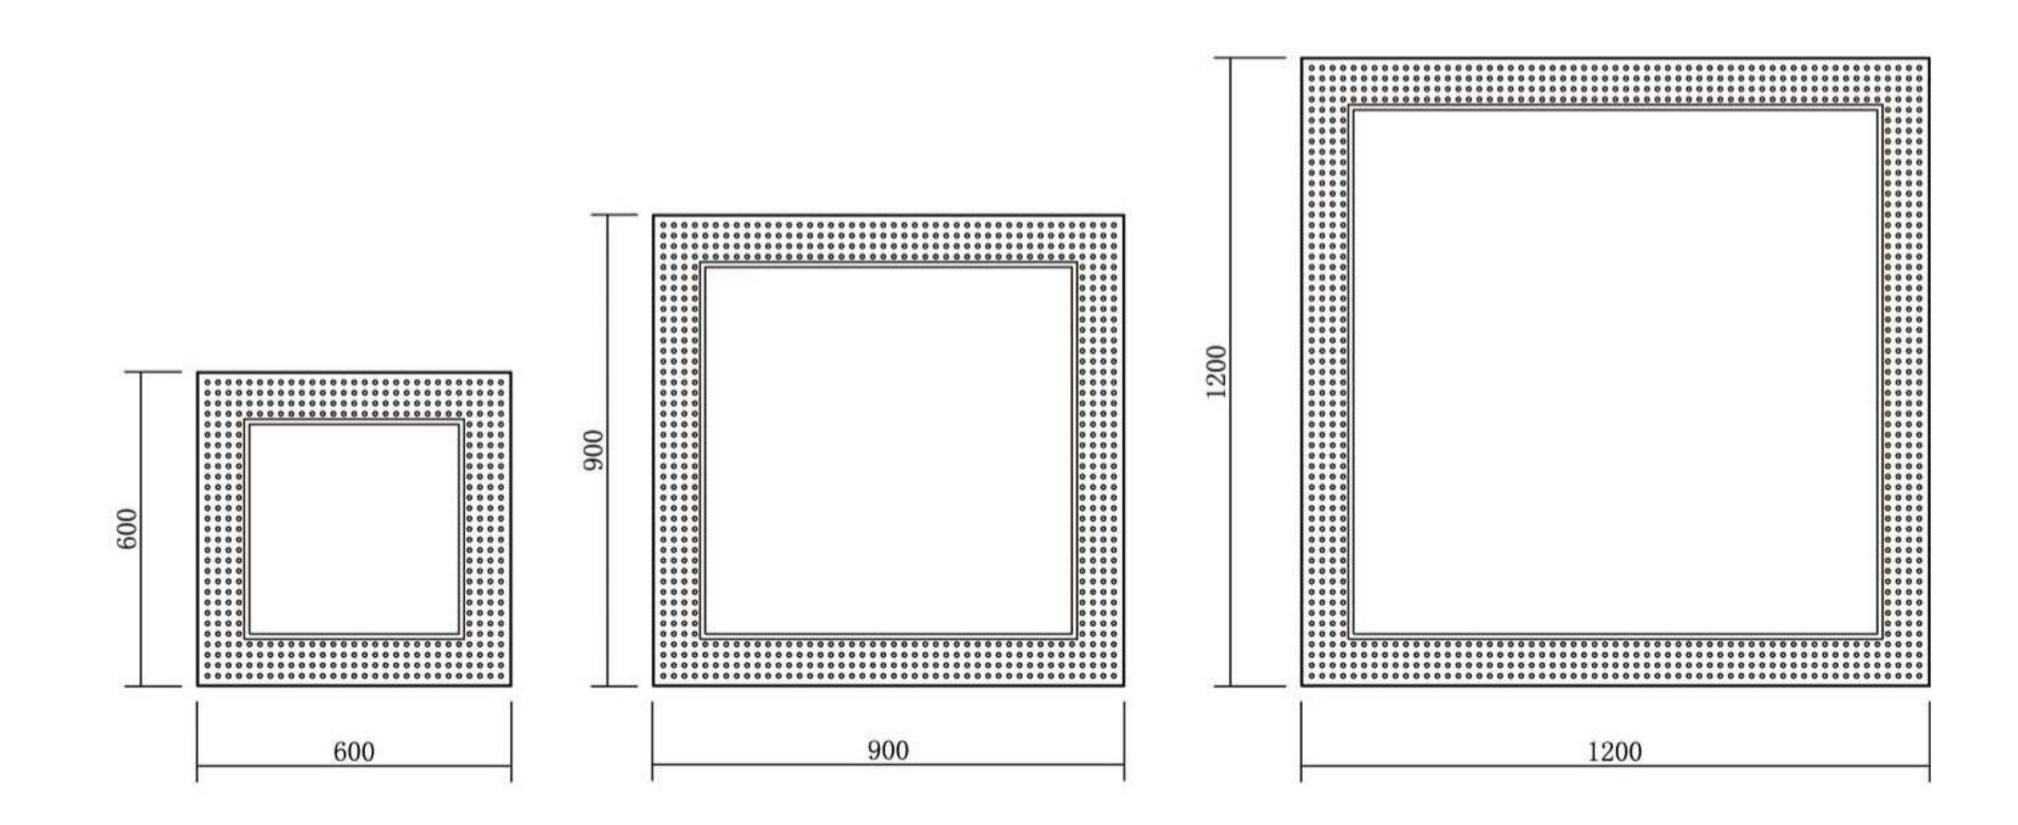


Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
Dimension	(23.6 "x 23.6")	(35.43" x 35.43")	(47.24 "x 47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	5kg	9kg	15kg
Lifespan		50,000 Hours	
Power	38W	80W	108W
Input	AC110 / 220 / 277V		
Lighting Output	2700 lm	5600 lm	7600 lm
	Warm White 2800-3200K		
3 CCT Options	E	3700-4200 Bright White	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 12



Illuminated acoustic range. Fully adaptable to suit your requirements.

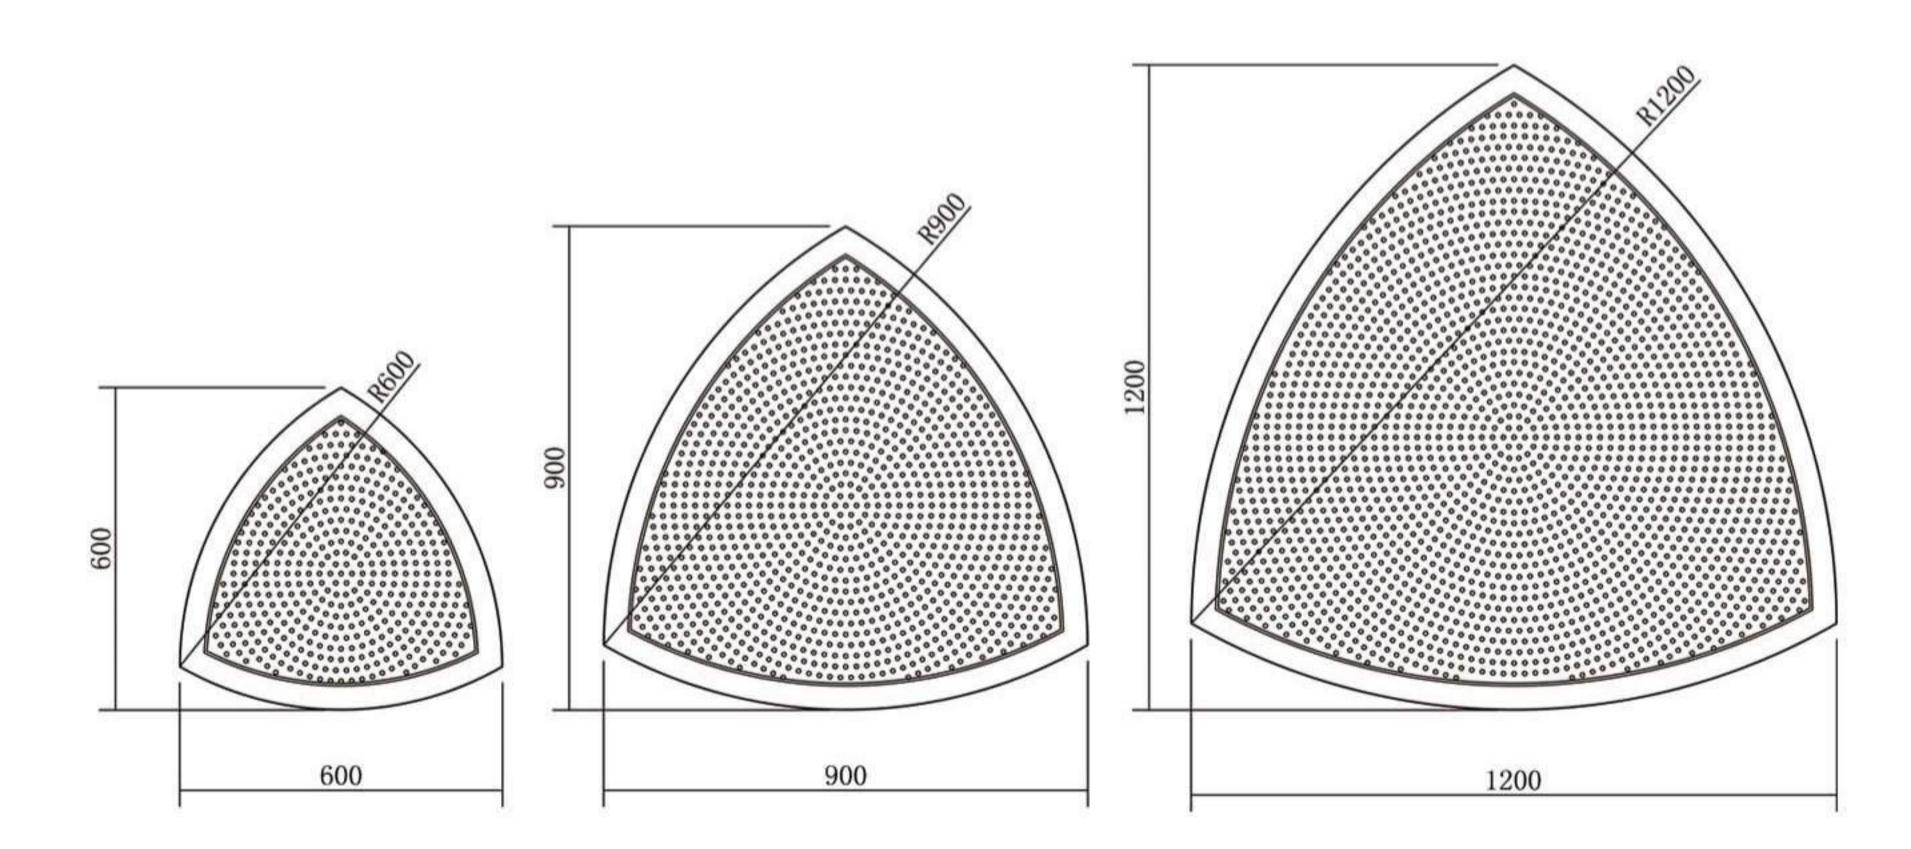

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
	(23.6" x 23.6")	(35.43" x 35.43")	(47.24" x 47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	4kg	5.5kg	9.5kg
Lifespan		50,000 Hours	
Power	28W	42W	56W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	3000 lm	4000 lm
	٧	Varm White 2800-3200	K
3 CCT Options	E	3right White 3700-4200	K
		Daylight 5600~6500K	
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 13



Illuminated acoustic range. Fully adaptable to suit your requirements.

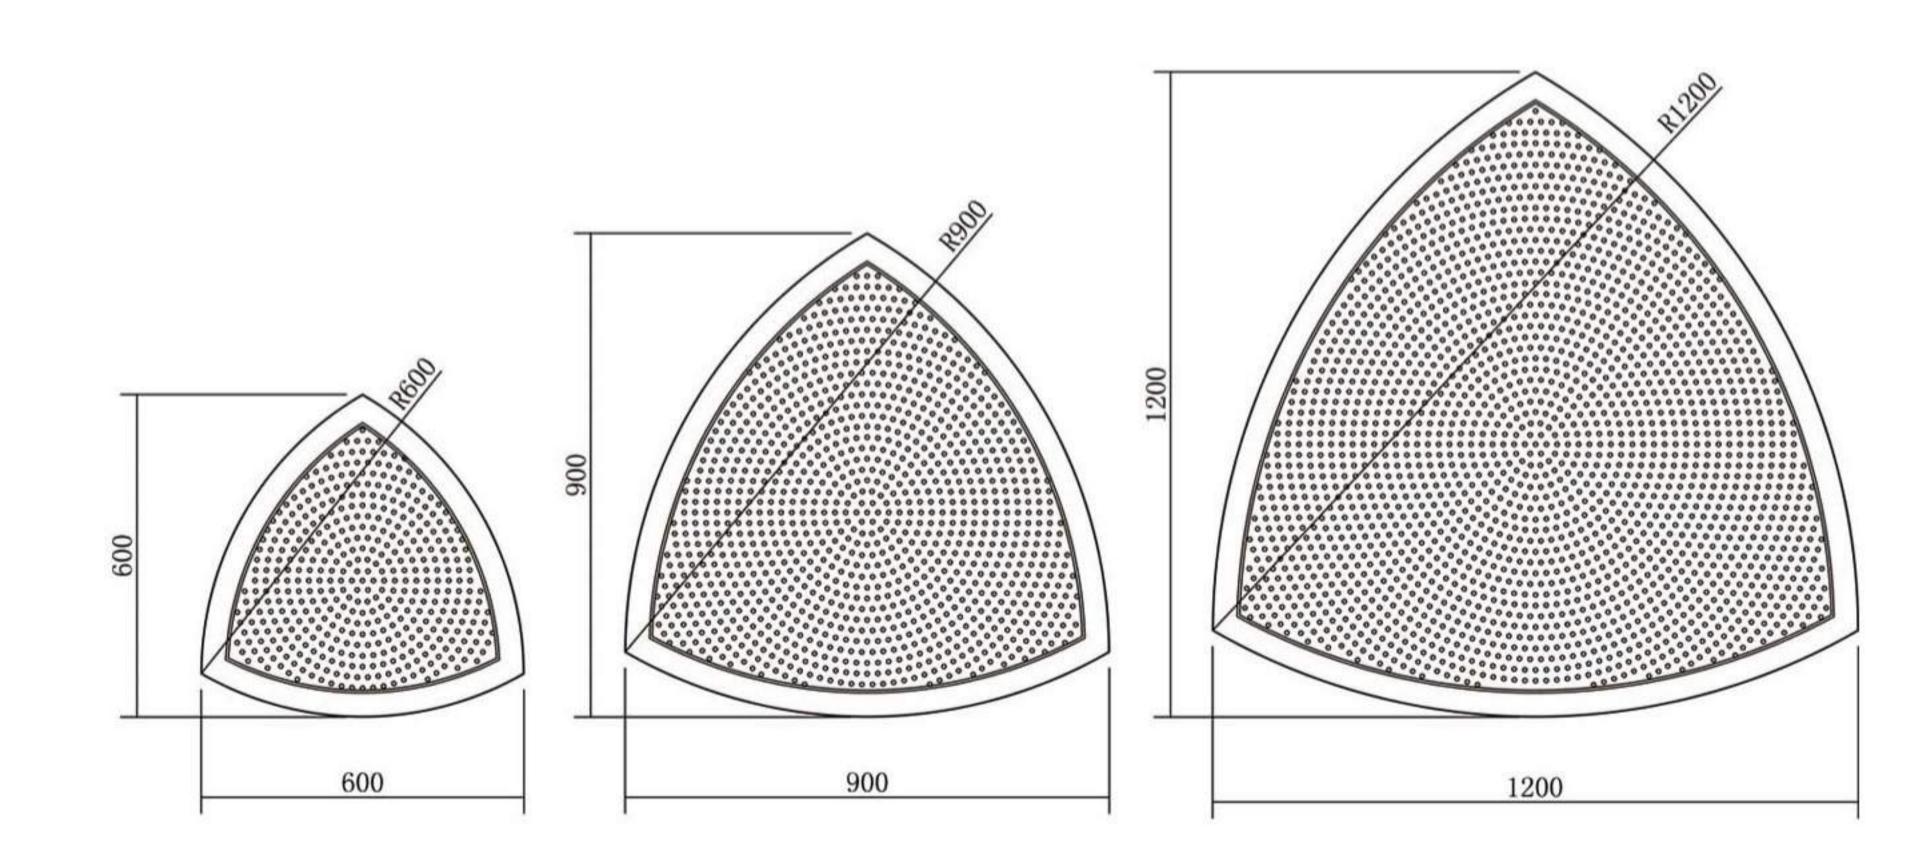


Dimonoion	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
Dimension	(23.6" x 23.6")	(35.43 "x 35.43")	(47.24 "x 47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	4kg	5.5kg	9.5kg
Lifespan	50,000 Hours		
Power	28W	42W	56W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	3000 lm	4000 lm
	٧	Varm White 2800-3200	K
3 CCT Options		3right White 3700-4200	K
		Daylight 5600~6500K	
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 14



Illuminated acoustic range. Fully adaptable to suit your requirements.

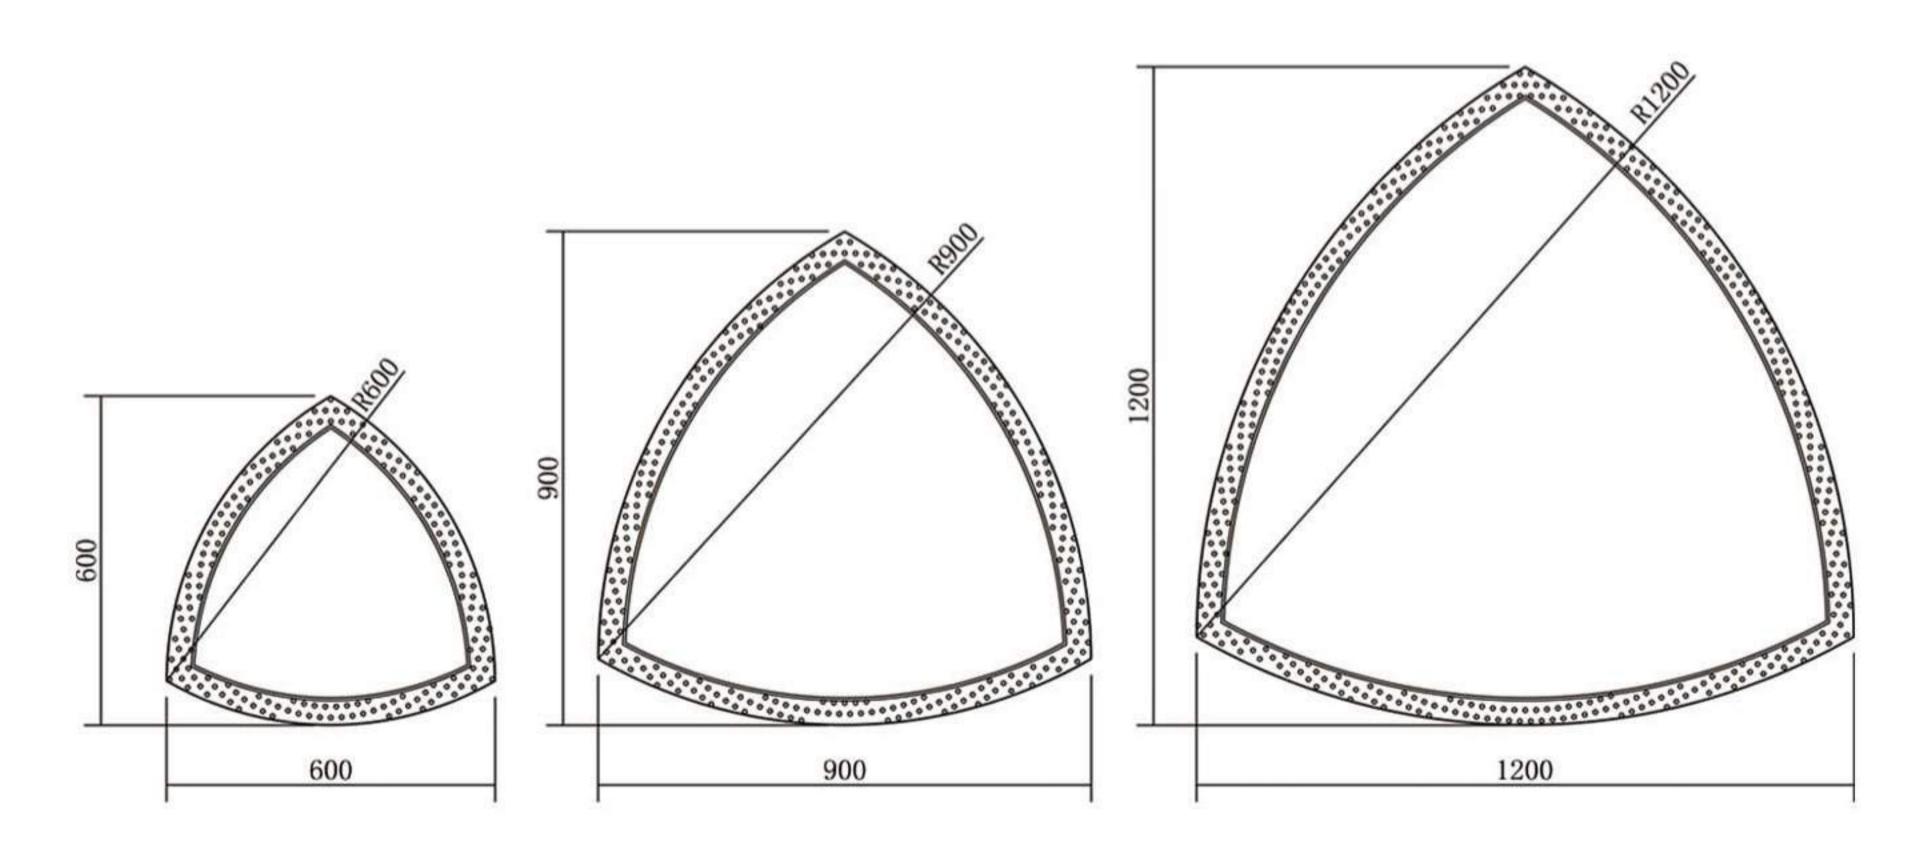

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
	(23.6 "x 23.6")	(35.43"x 35.43")	(47.24" x 47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	3.5kg	7kg	11kg
Lifespan		50,000 Hours	
Power	21W	45W	77W
Input	AC110 / 220 / 277V		
Lighting Output	1500 lm	3200 lm	5400 lm
	V	Varm White 2800-3200	K
3 CCT Options	E	3right White 3700-4200	K
		Daylight 5600~6500K	
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 15



Illuminated acoustic range. Fully adaptable to suit your requirements.

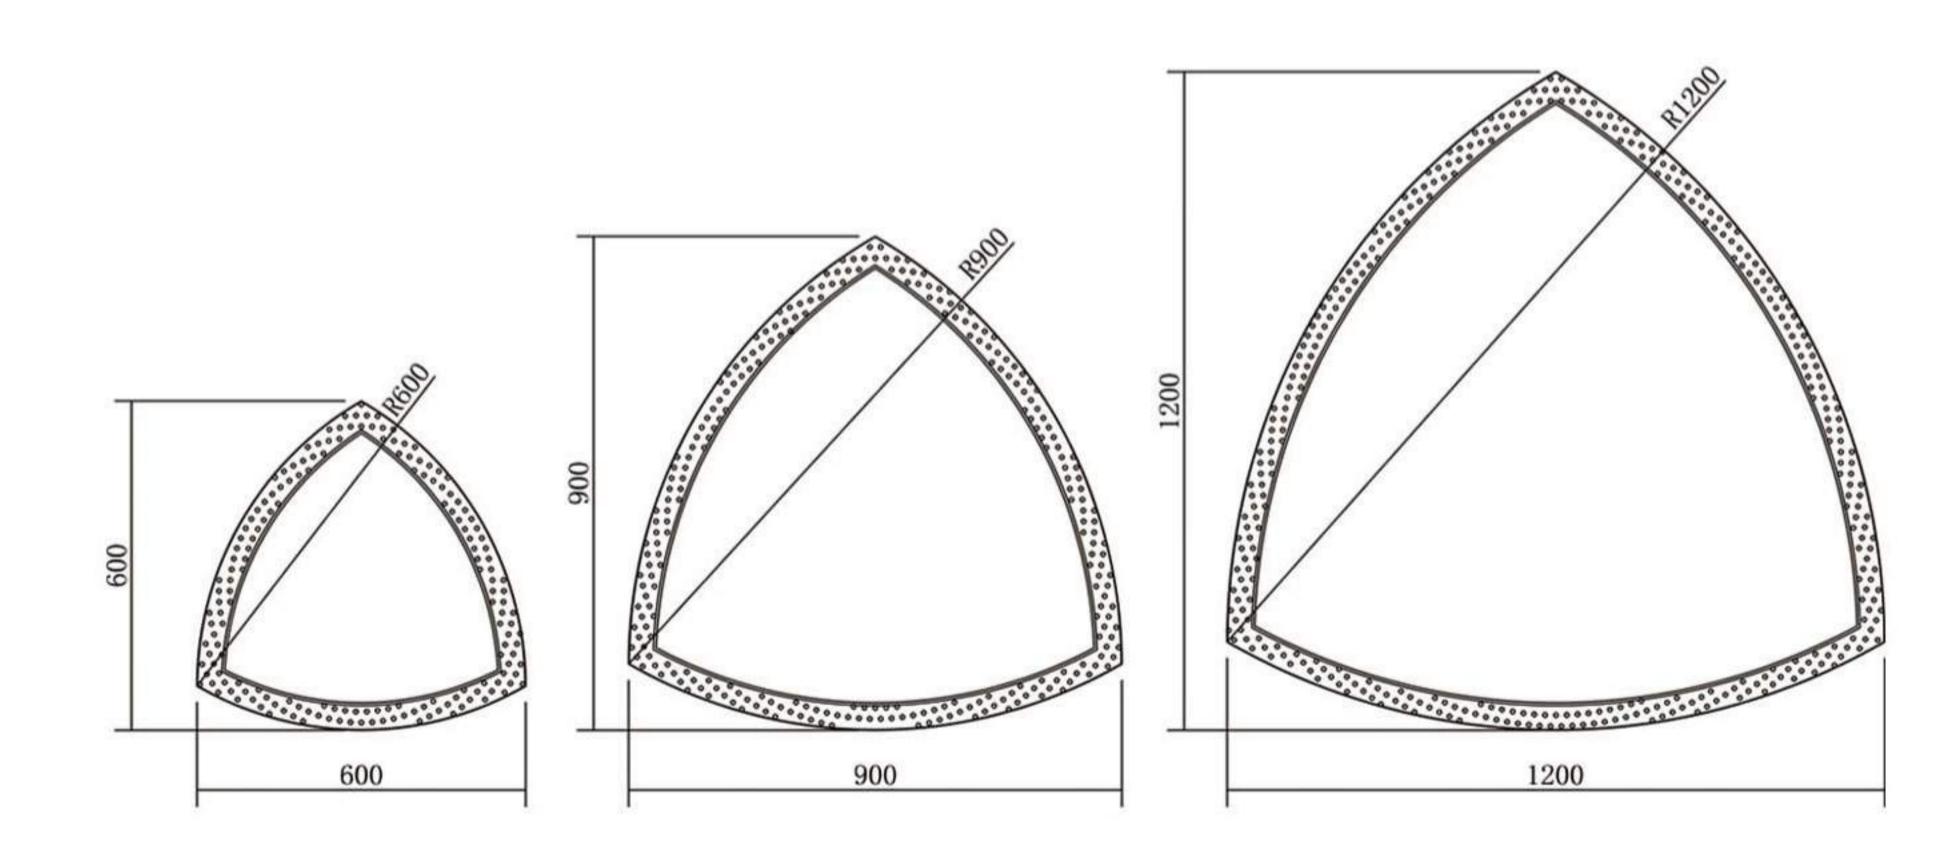


Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
	(23.6" x 23.6")	(35.43 "x 35.43")	(47.24" x 47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	3.5kg	7kg	11kg
Lifespan	50,000 Hours		
Power	21W	45W	77W
Input	AC110 / 220 / 277V		
Lighting Output	1500 lm	3200 lm	5400 lm
	V	Varm White 2800-3200	K
3 CCT Options	E	3right White 3700-4200	K
		Daylight 5600~6500K	
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


Reference: AC+LED 16



Illuminated acoustic range. Fully adaptable to suit your requirements.

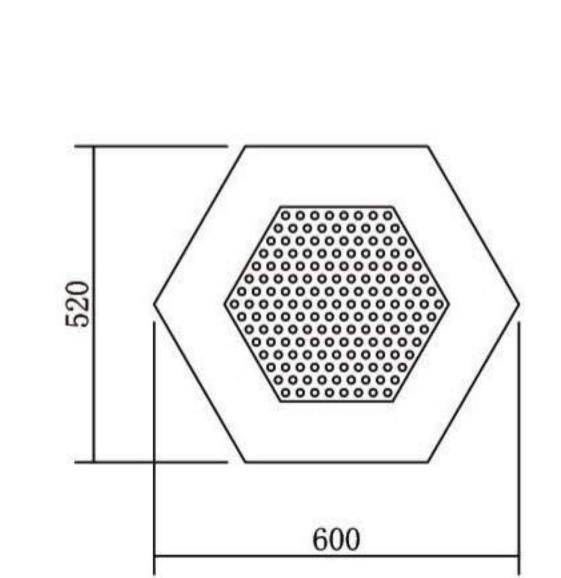

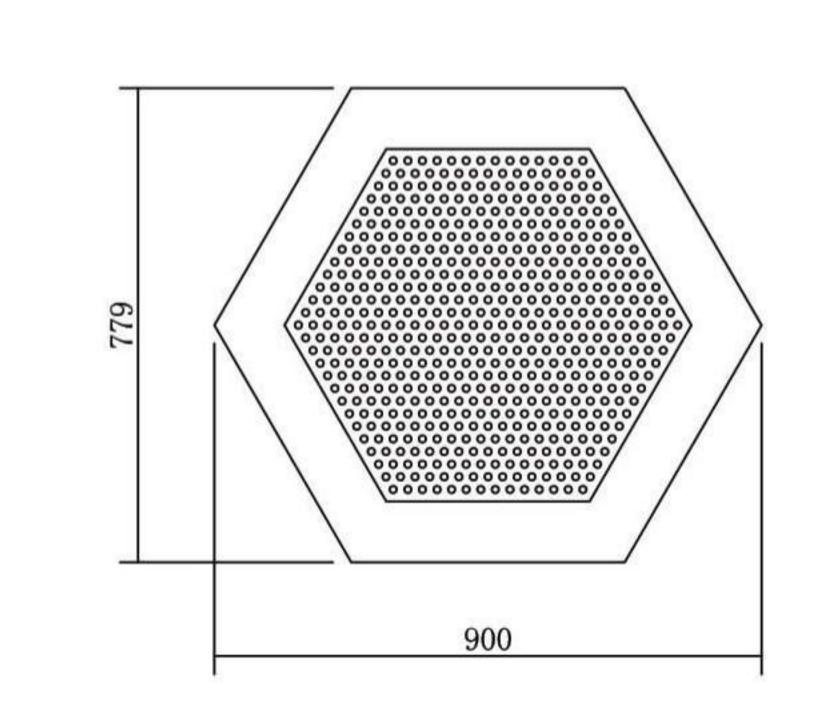

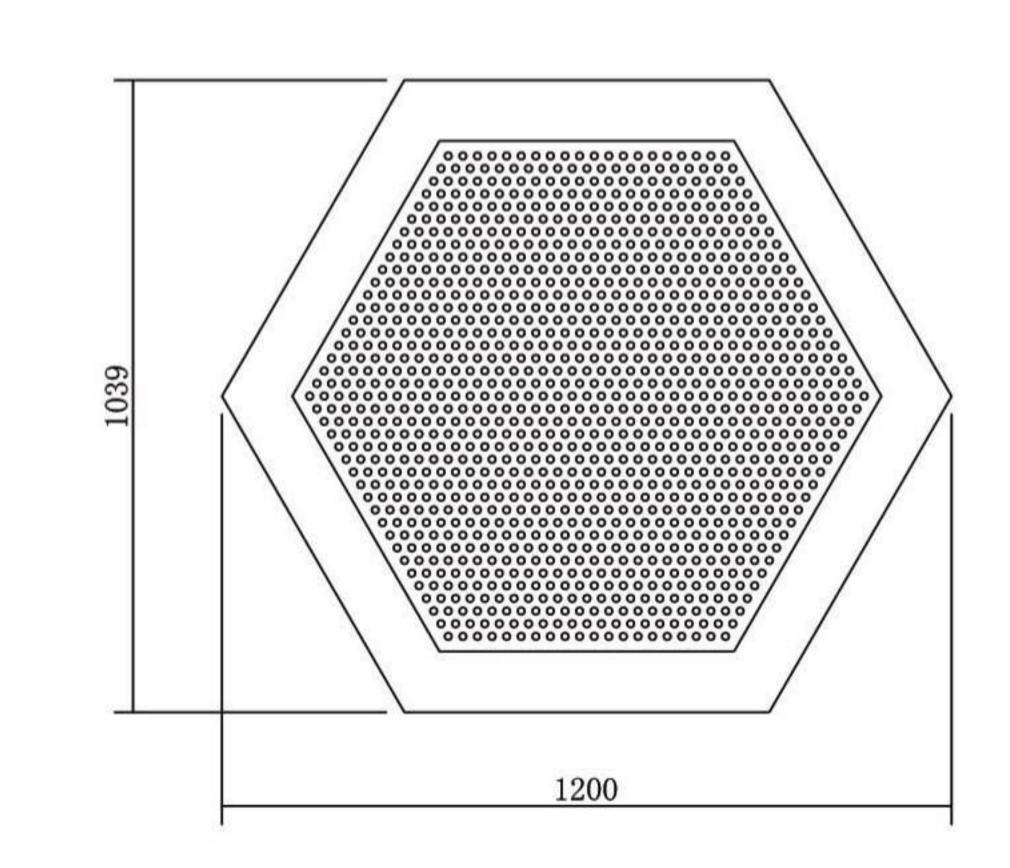

Dimension	L600xW519.6mm	L900xW779.42mm	L1200xW1039.2mm
	(23.6 "x 20.5")	(35.4 "x 30.7")	(47.2" x 40.9")
Luminaire Height	88 mm(3.46")		
Product Weight	3.5kg	6 kg	9 kg
Lifespan		50,000 Hours	
Power	25W	42W	56W
Input	AC110 / 220 / 277V		
Lighting Output	1800 lm	3000 lm	4000 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


ILLUMINATED ACOUSTIC RANGE


Reference: AC+LED 17



Illuminated acoustic range. Fully adaptable to suit your requirements.

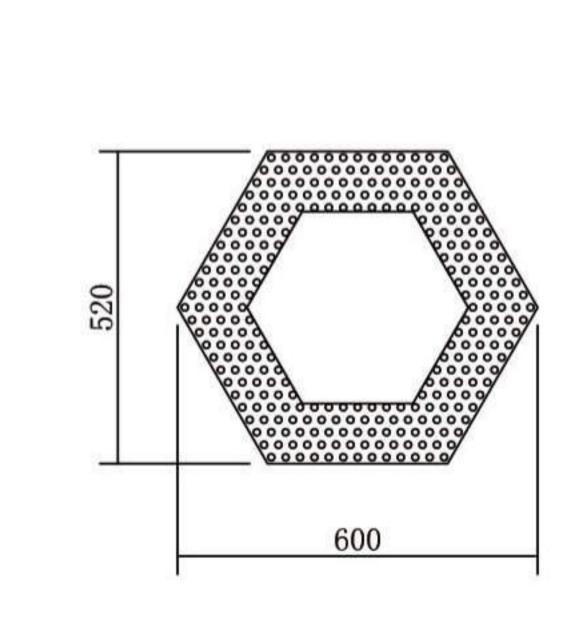

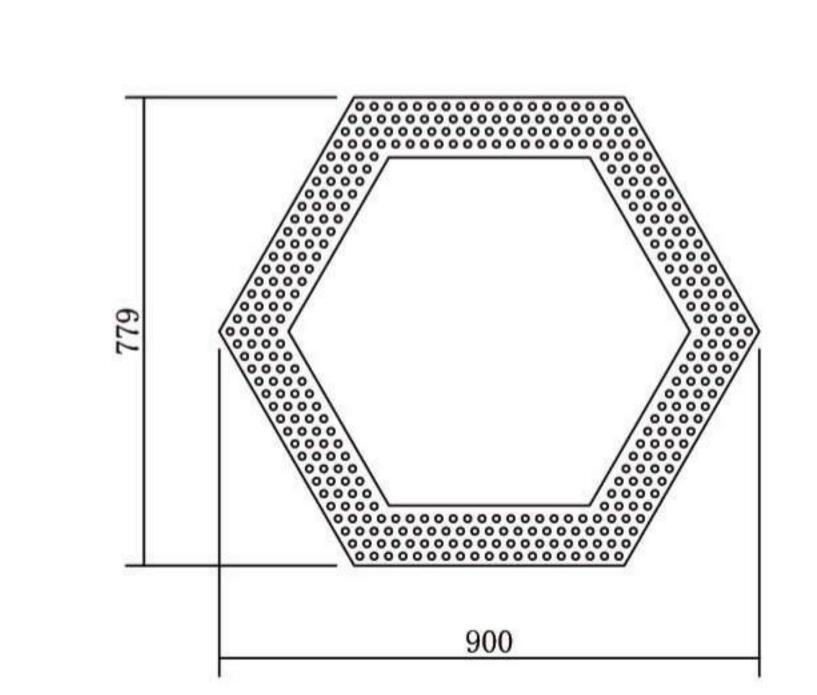

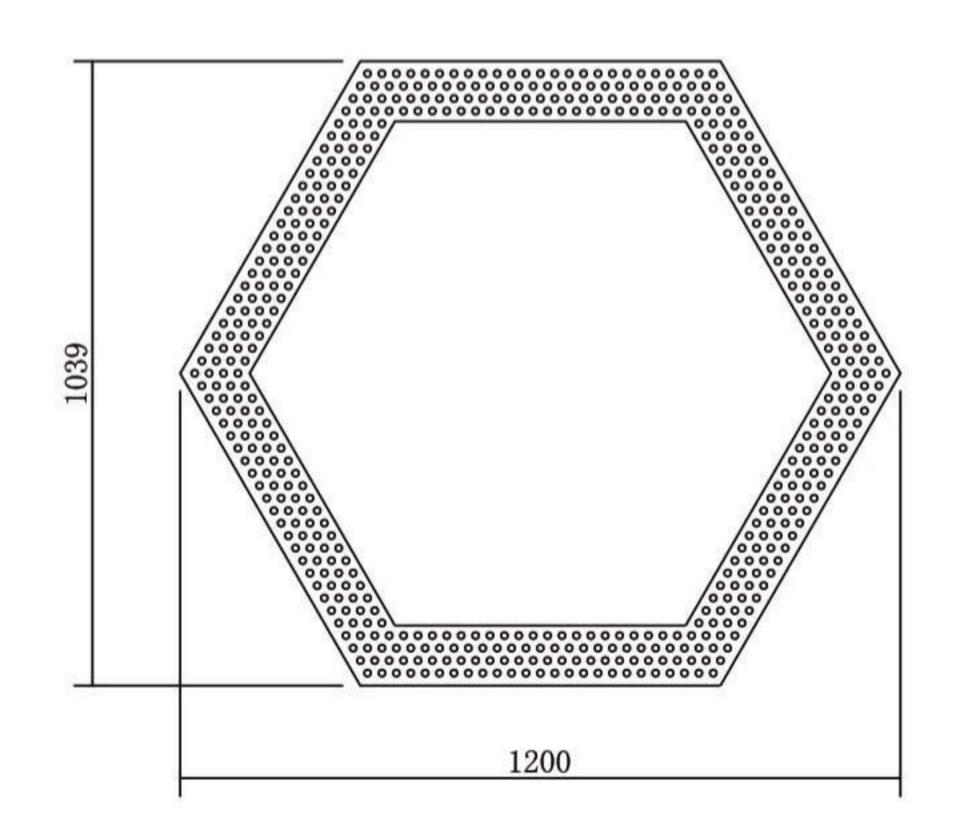


Dimension	L600xW519.6mm	L900xW779.42mm	L1200xW1039.2mm
Difficitation	(23.6 "x 20.5")	(35.4" x 30.7")	(47.2 "x 40.9")
Luminaire Height		88 mm(3.46")	
Product Weight	3 kg	4.5 kg	7 kg
Lifespan	50,000 Hours		
Power	28W	38W	70W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	2700 lm	5000 lm
	٧	Varm White 2800-3200	K
3 CCT Options	В	3700-4200 Bright White	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


Reference: AC+LED 18



Illuminated acoustic range. Fully adaptable to suit your requirements.

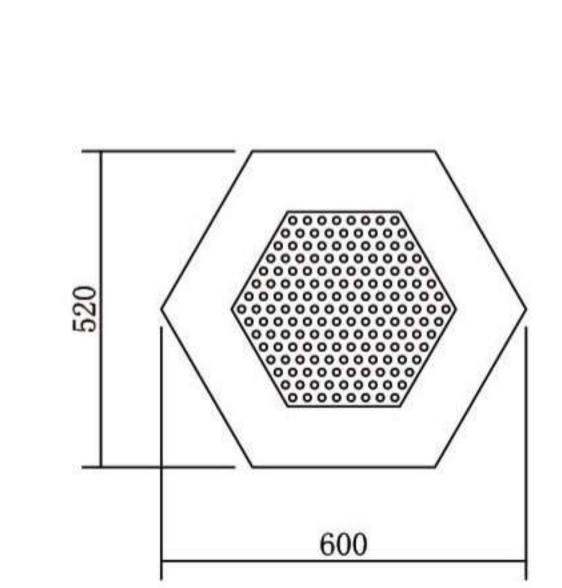

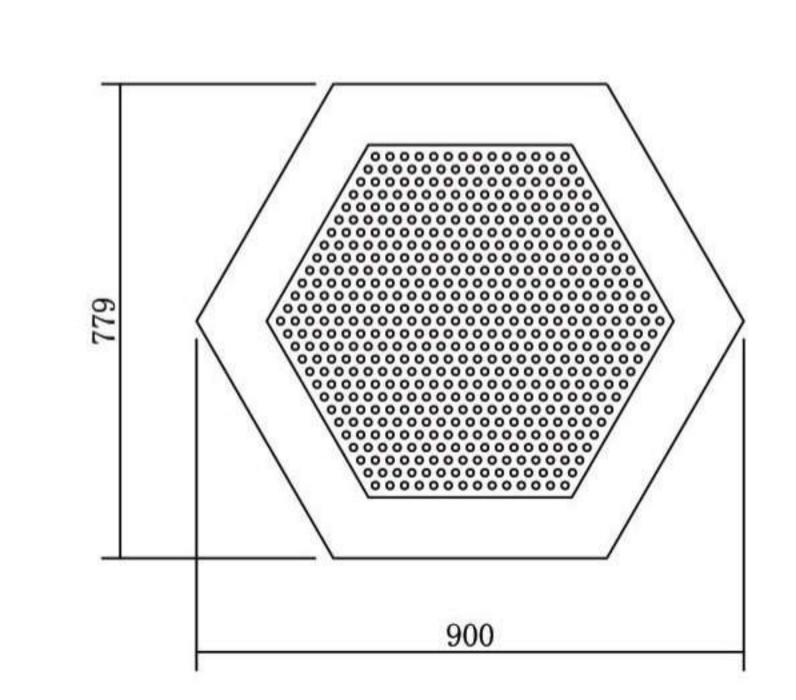

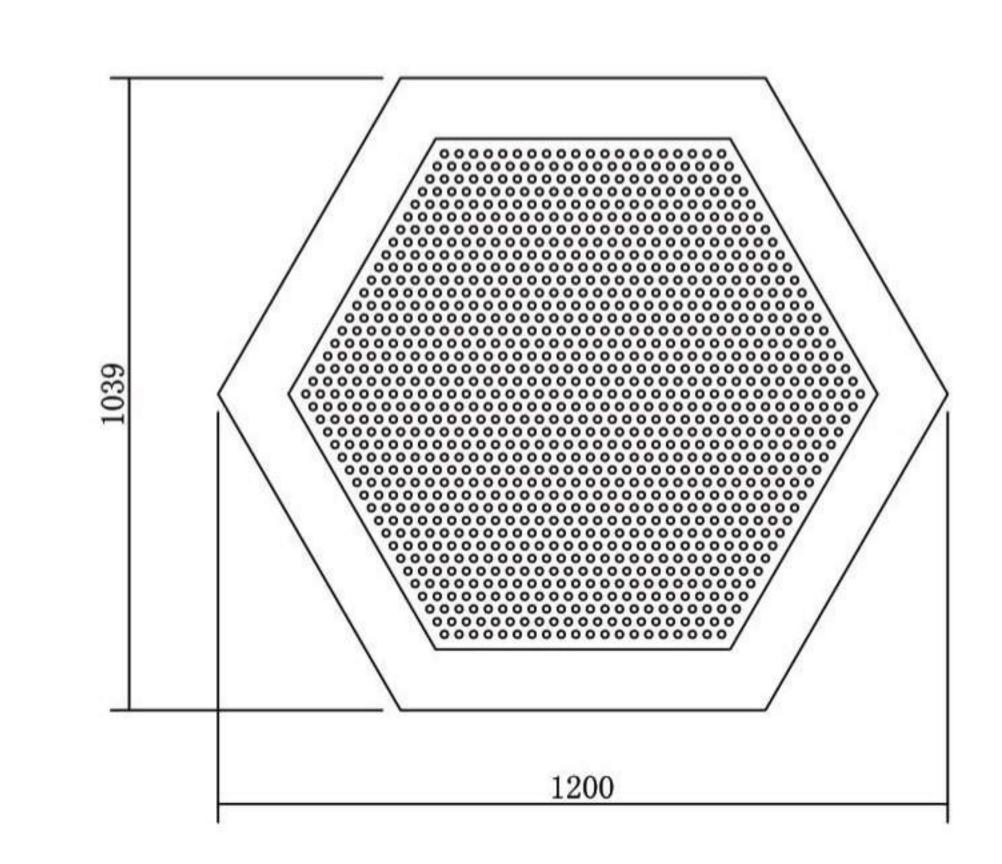

Dimension	L600xW519.6mm	L900xW779.42mm	L1200xW1039.2mm
	(23.6 "x 20.5")	(35.4 "x 30.7")	(47.2 "x 40.9")
Luminaire Height	88 mm(3.46")		
Product Weight	3.5kg	6 kg	9 kg
Lifespan		50,000 Hours	
Power	25W	42W	56W
Input		AC110 / 220 / 277V	
Lighting Output	1800 lm	3000 lm	4000 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


ILLUMINATED ACOUSTIC RANGE


Reference: AC+LED 19



Illuminated acoustic range. Fully adaptable to suit your requirements.

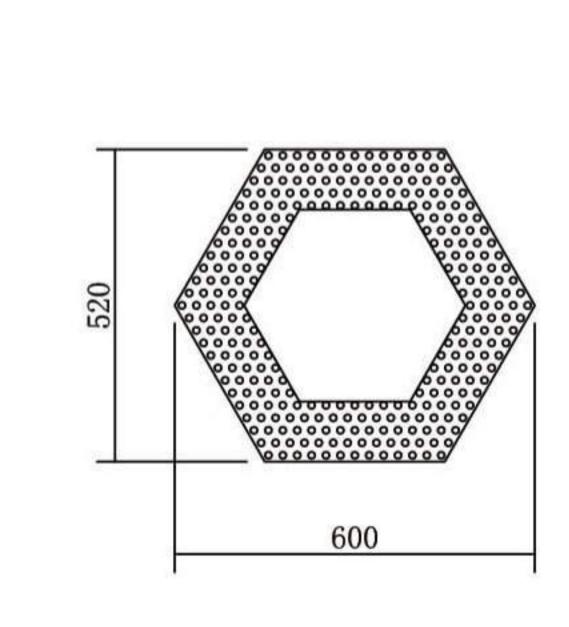

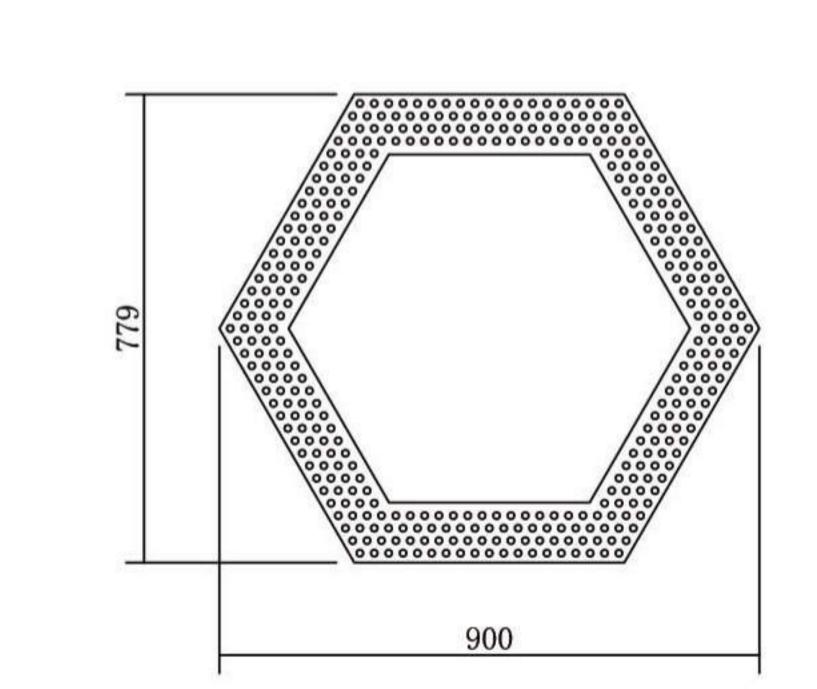

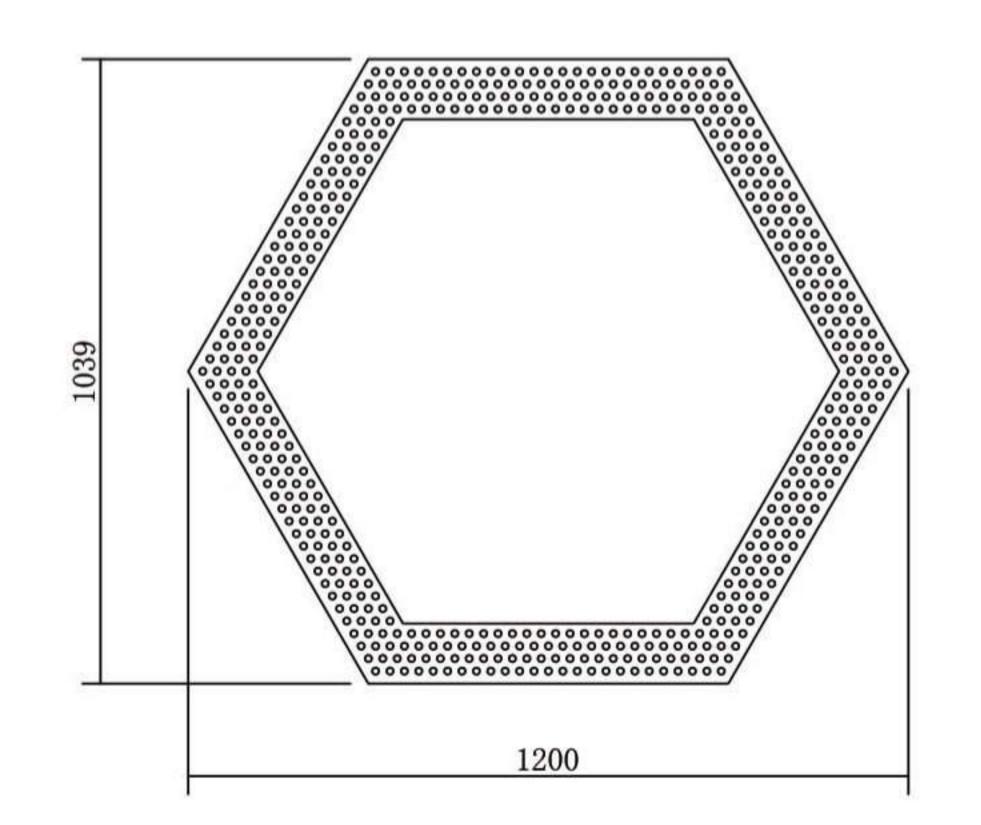


Dimension	L600xW519.6mm	L900xW779.42mm	L1200xW1039.2mm
Difficusion	(23.6 "x 20.5")	(35.4 "x 30.7")	(47.2 "x 40.9")
Luminaire Height		88 mm(3.46")	
Product Weight	3.5 kg	6.5 kg	10.5 kg
Lifespan		50,000 Hours	
Power	28W	38W	70W
Input		AC110 / 220 / 277V	
Lighting Output	2000 lm	2700 lm	5000 lm
	٧	Varm White 2800-3200	K
3 CCT Options	Е	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 20



Illuminated acoustic range. Fully adaptable to suit your requirements.

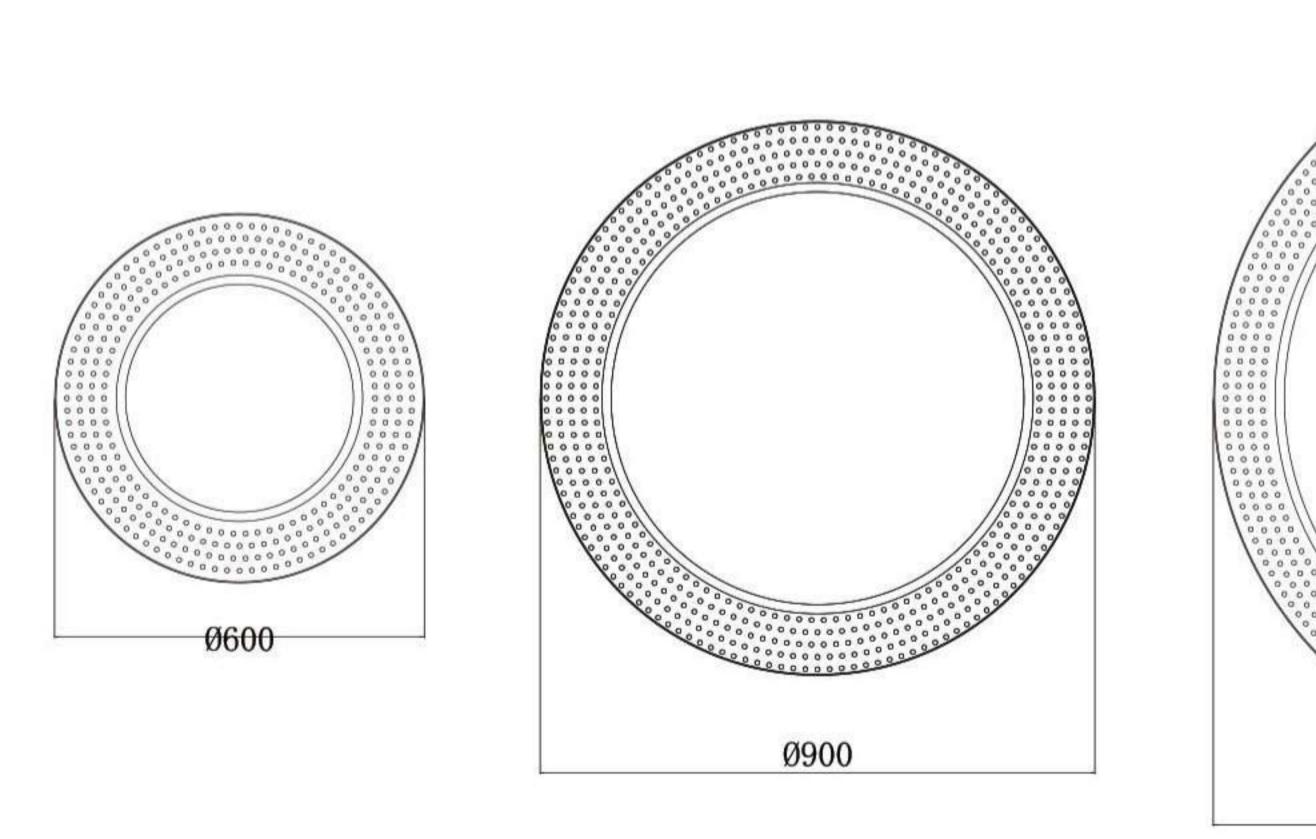

Dimension	Dia.600mm (23.62")	Dia.900mm (35.43")	Dia. 1200mm (47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	3.7kg	7kg	11.5kg
Lifespan		50,000 Hours	
Power	28W	60W	91W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	4200 lm	6400 lm
3 CCT Options	Warm White 2800-3200K Bright White 3700-4200K Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free Eco-friendly
- Various mounting options available
 Fully bespoke options available


ILLUMINATED ACOUSTIC RANGE


Reference: AC+LED 21



Illuminated acoustic range. Fully adaptable to suit your requirements.

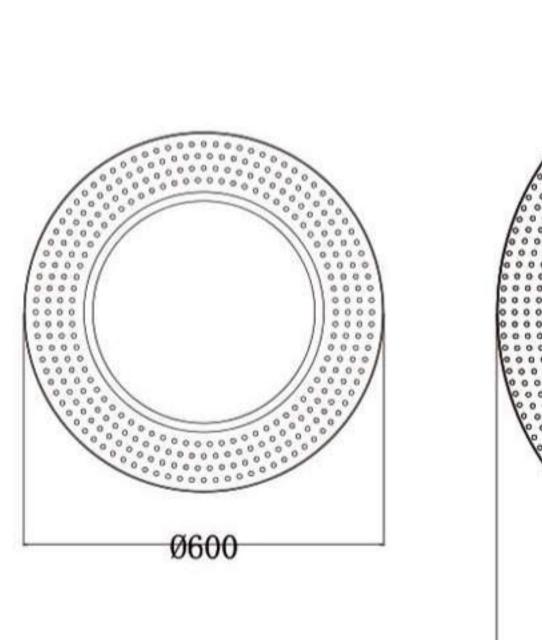

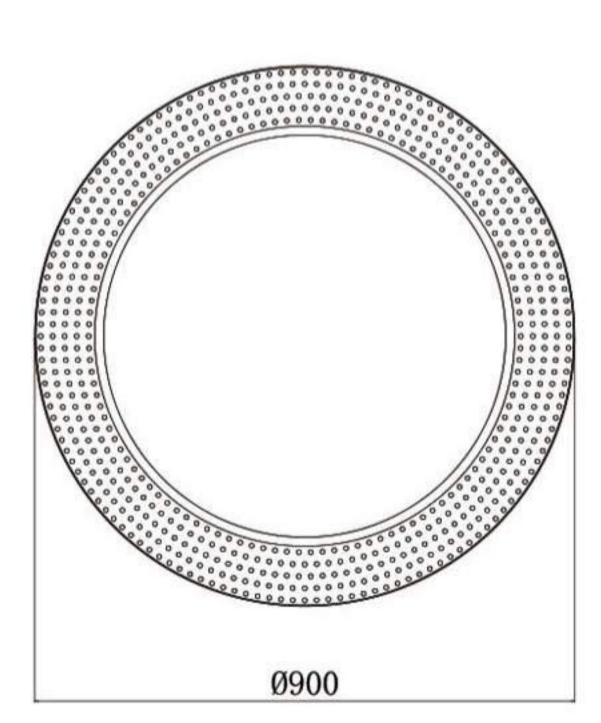

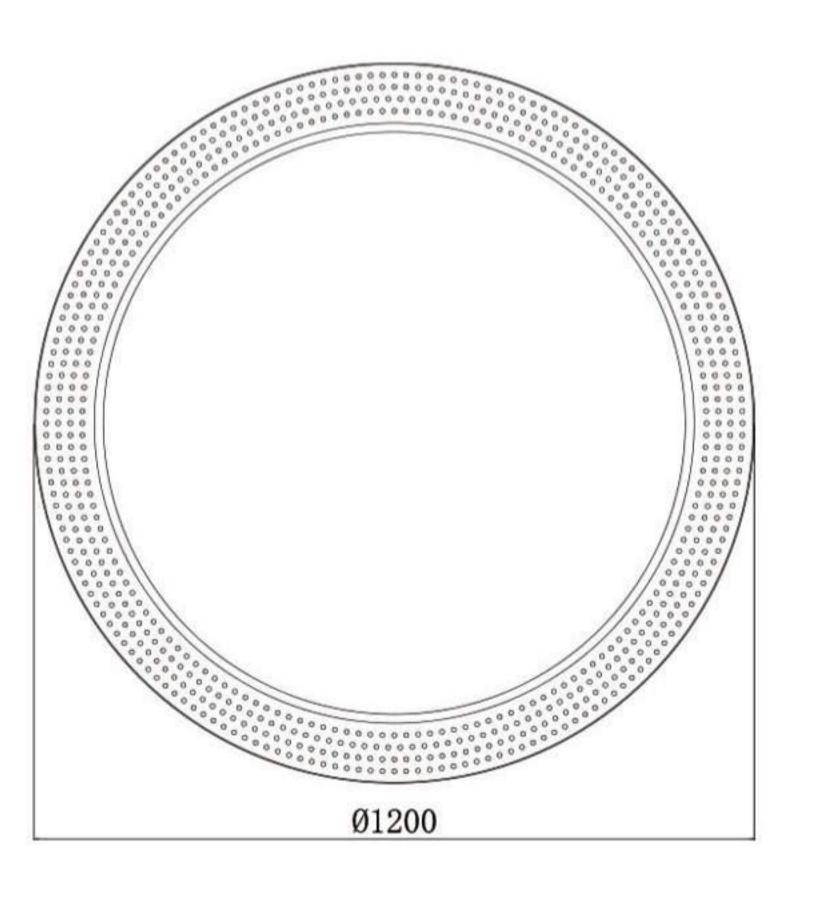


Dimension	Dia.600mm	Dia.900mm	Dia. 1200mm
Difficusion	(23.62")	(35.43")	(47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	3.7kg	7kg	11.5kg
Lifespan		50,000 Hours	
Power	28W	60W	91W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	4200 lm	6400 lm
	Warm White 2800-3200K		
3 CCT Options	В	3right White 3700-42001	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warrantv	3 Years		


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


Reference: AC+LED 22



Illuminated acoustic range. Fully adaptable to suit your requirements.

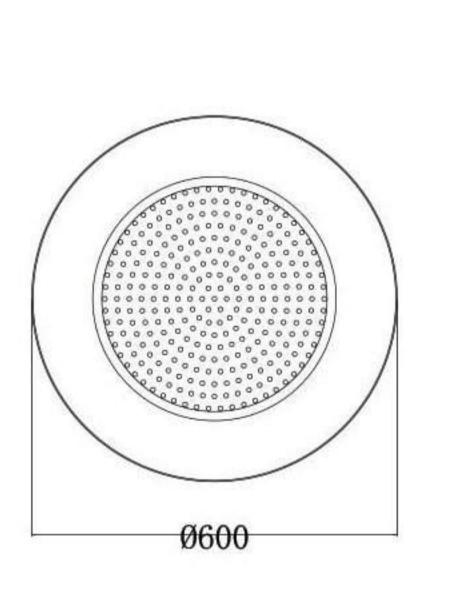

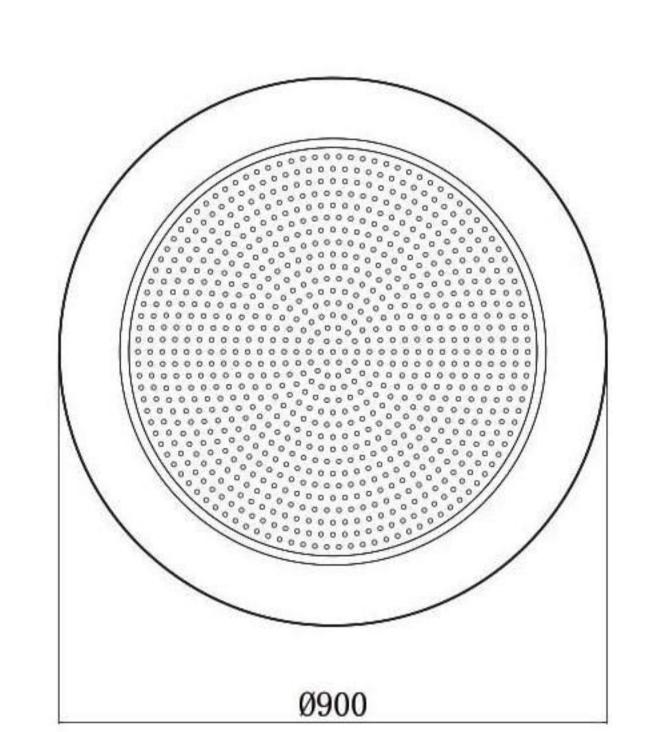

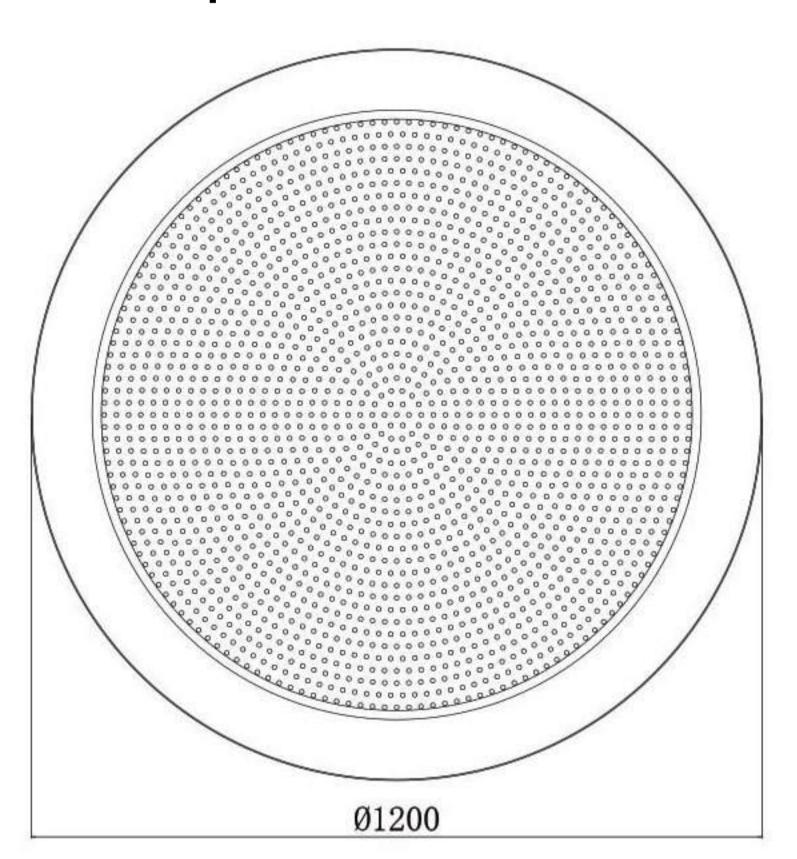

Dimension	Dia.600mm	Dia.900mm	Dia. 1200mm
Difficusion	(23.62")	(35.43")	(47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	5 kg	8.8 kg	13 kg
Lifespan		50,000 Hours	
Power	28W	42W	56W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	3000 lm	4000 lm
	٧	Varm White 2800-3200	K
3 CCT Options	E	3700-4200 Bright White	K
		Daylight 5600~6500K	
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


ILLUMINATED ACOUSTIC RANGE


Reference: AC+LED 23



Illuminated acoustic range. Fully adaptable to suit your requirements.

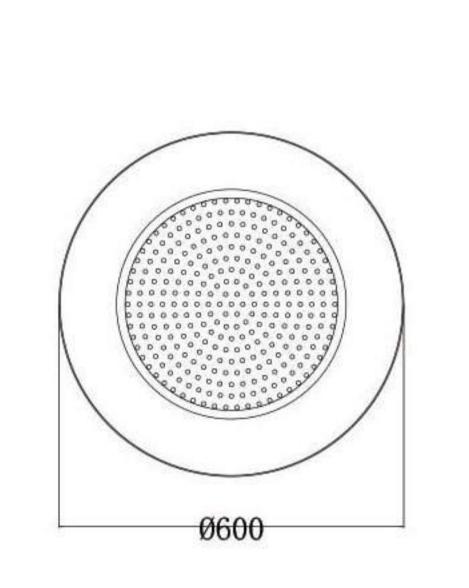

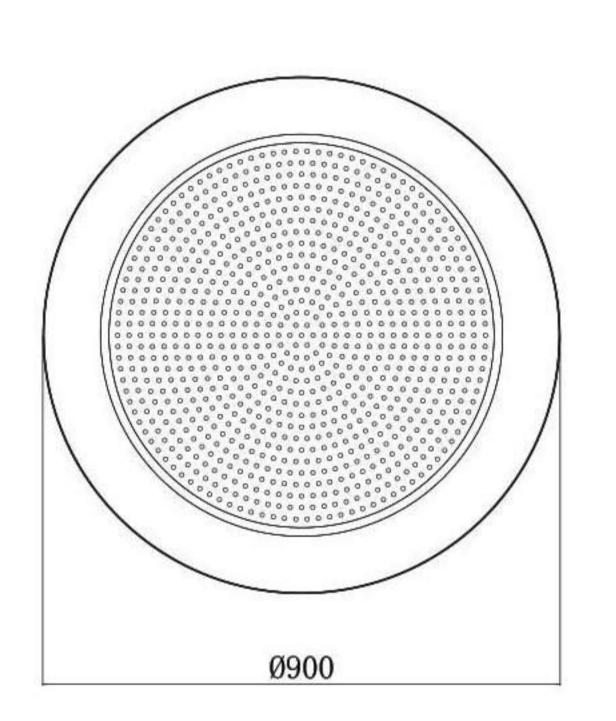

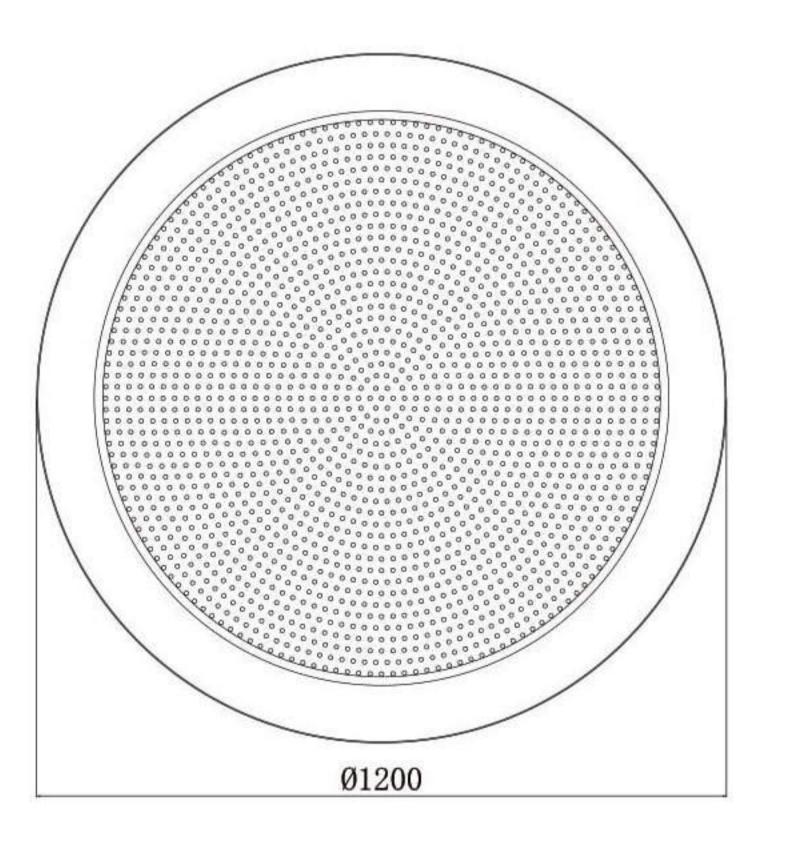


Dimension	Dia.600mm	Dia.900mm	Dia. 1200mm
	(23.62")	(35.43")	(47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	5 kg	8.8 kg	13 kg
Lifespan		50,000 Hours	
Power	28W	42W	56W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	3000 lm	4000 lm
	Warm White 2800-3200K		
3 CCT Options	Е	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


Reference: AC+LED 24



Illuminated acoustic range. Fully adaptable to suit your requirements.

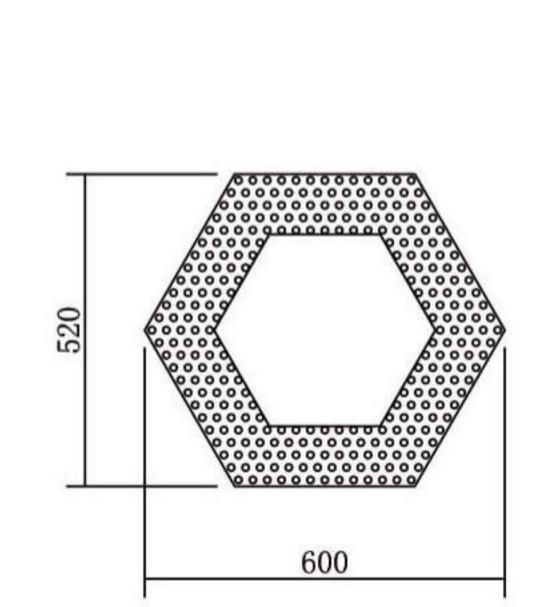

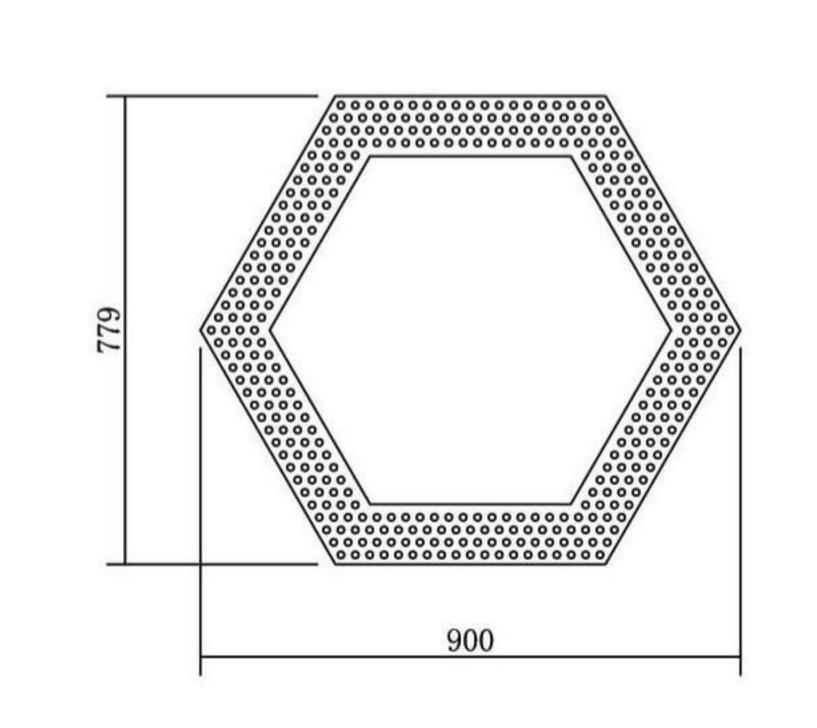

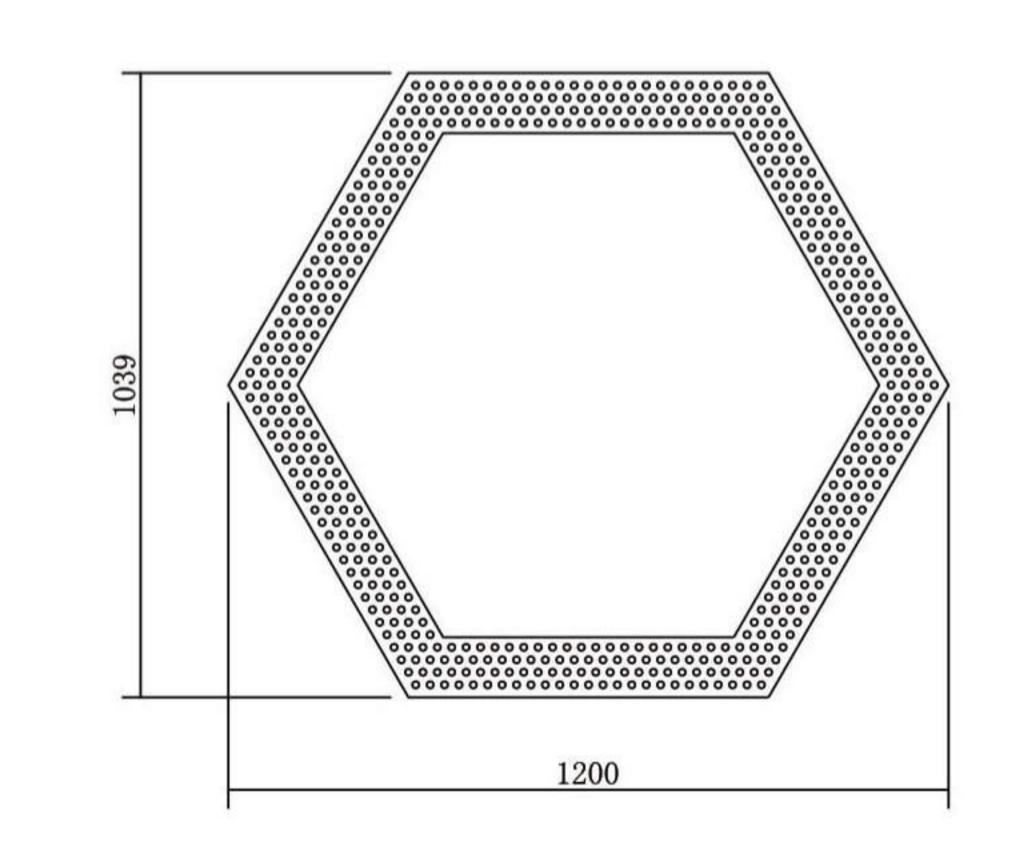

Dimension	L600xW519.6mm	L900xW779.42mm	L1200xW1039.2mm
	(23.6" x 20.5")	(35.4" x 30.7")	(47.2" x 40.9")
Luminaire Height	88 mm(3.46")		
Product Weight	3 kg	4.5 kg	7 kg
Lifespan		50,000 Hours	
Power	28W	38W	70W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	2700 lm	5000 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


ILLUMINATED ACOUSTIC RANGE


Reference: AC+LED 25



Illuminated acoustic range. Fully adaptable to suit your requirements.

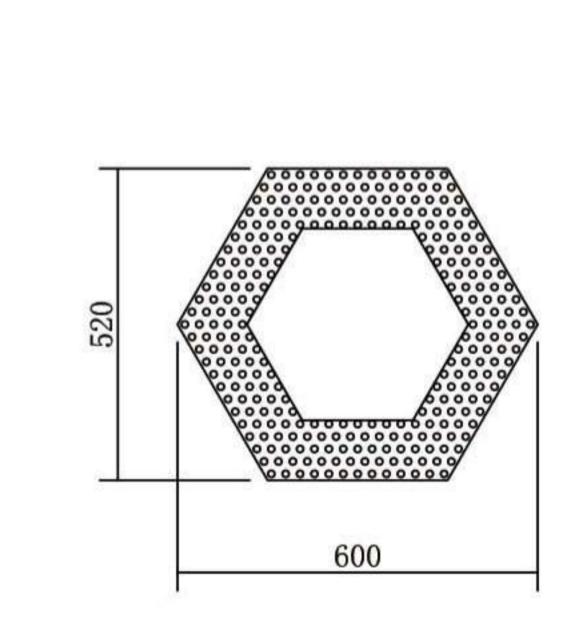

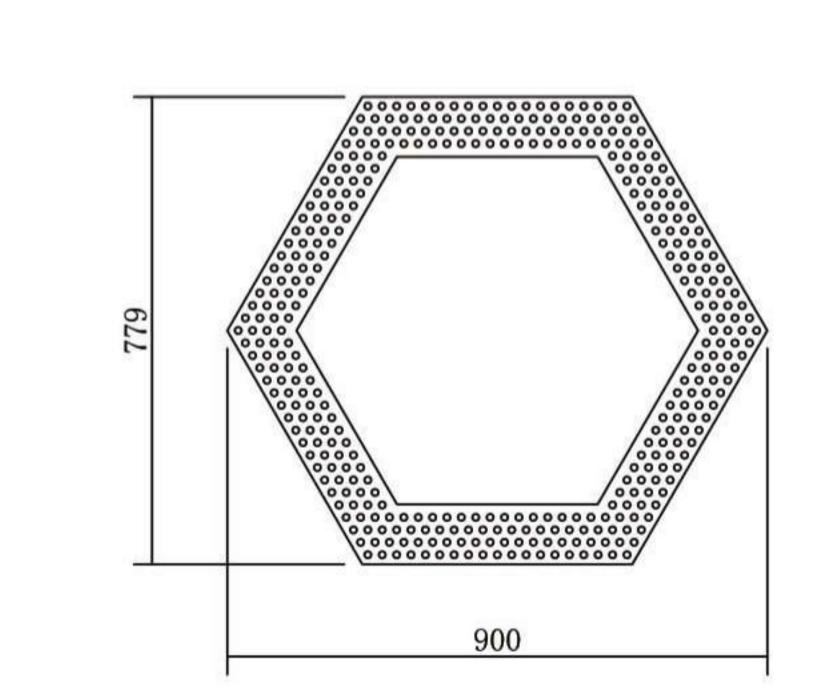

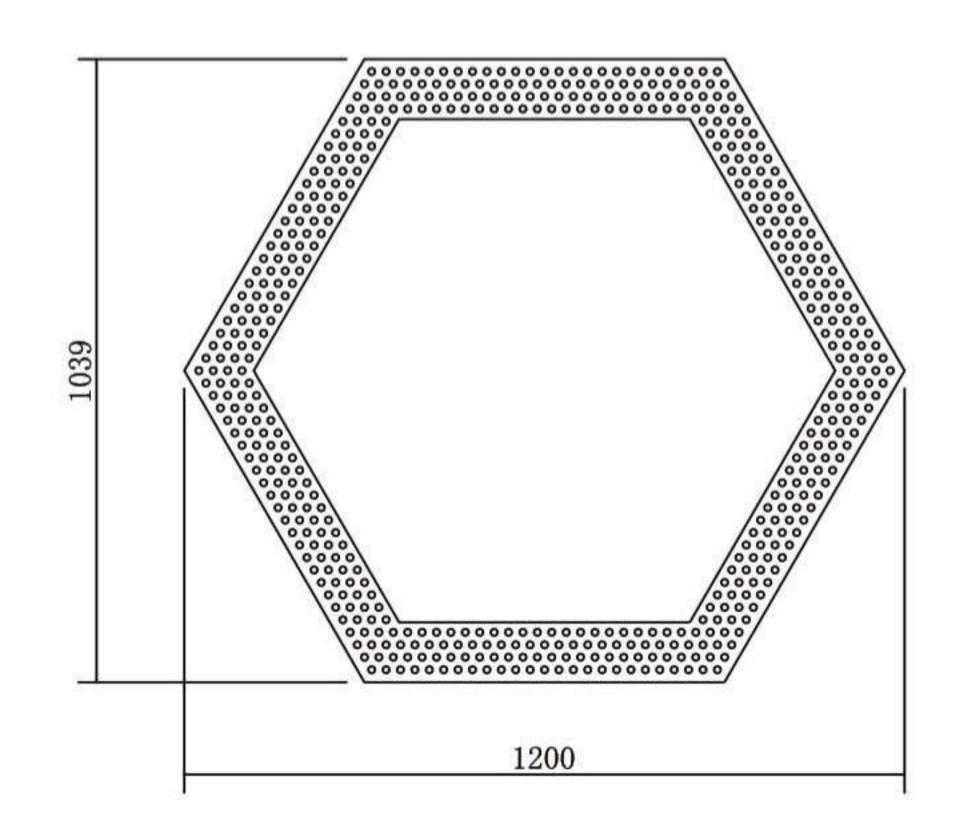


	L600xW519.6mm	L900xW779.42mm	L1200xW1039.2mm
Dimension	(23.6 "x 20.5")	(35.4 "x 30.7")	(47.2" x 40.9")
Luminaire Height		88 mm(3.46")	
Product Weight	3 kg	4.5 kg	7 kg
Lifespan		50,000 Hours	
Power	28W	38W	70W
Input	AC110 / 220 / 277V		
Lighting Output	2000 lm	2700 lm	5000 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


Reference: AC+LED 26



Illuminated acoustic range. Fully adaptable to suit your requirements.

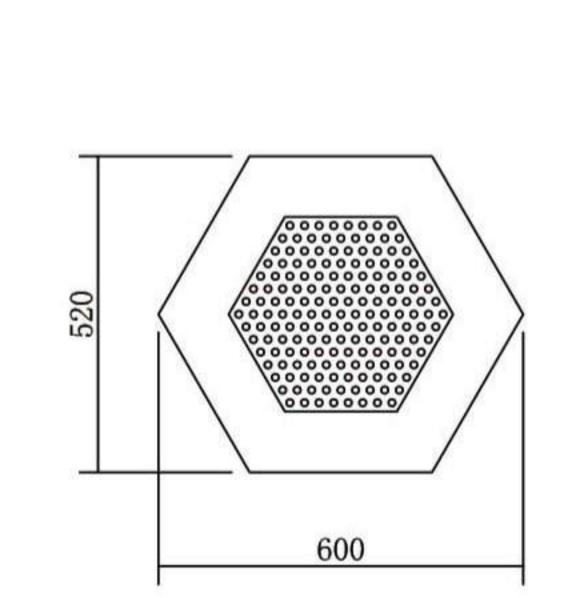

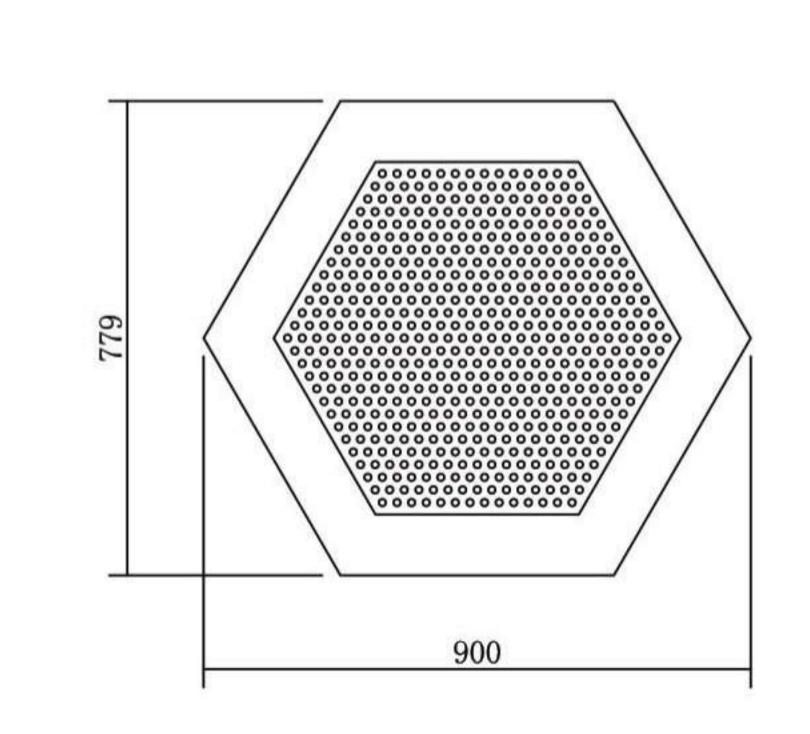

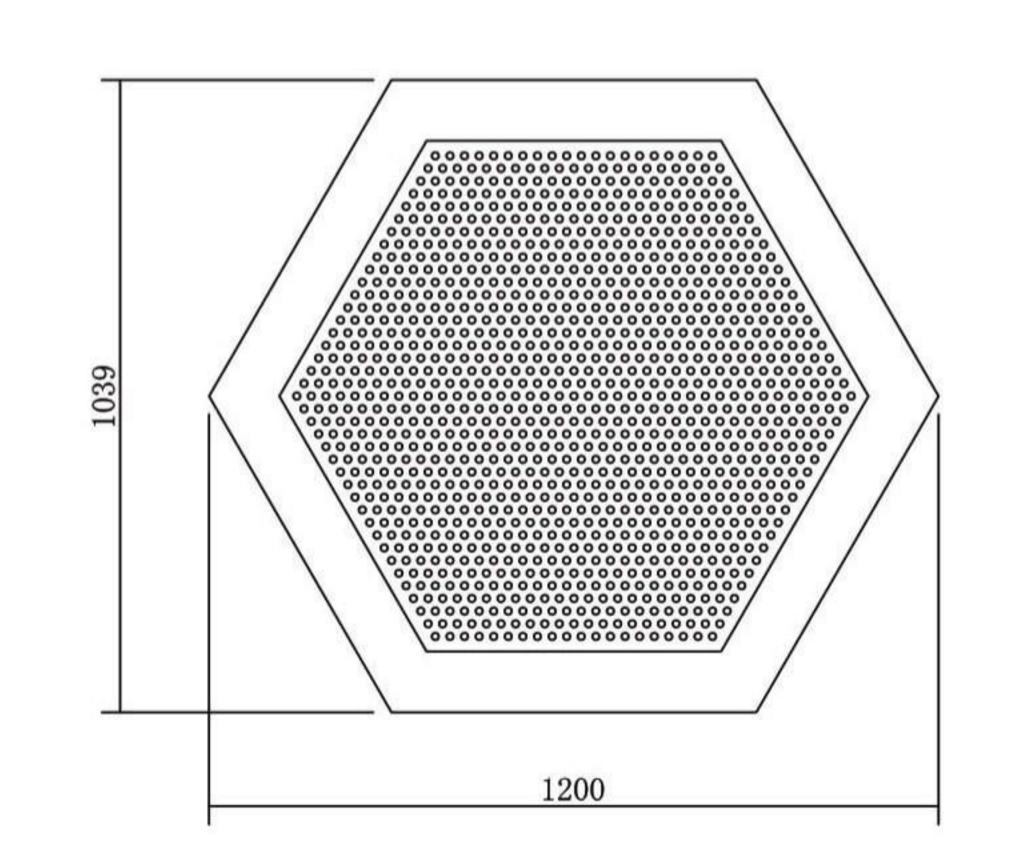

Dimension	L600xW519.6mm (23.6" x 20.5")	L900xW779.42mm (35.4" x 30.7")	L1200xW1039.2mm (47.2" x 40.9")
Luminaire Height	88 mm(3.46")		
Product Weight	3.5kg	6 kg	9 kg
Lifespan		50,000 Hours	
Power	25W	42W	56W
Input		AC110 / 220 / 277V	
Lighting Output	1800 lm	3000 lm	4000 lm
3 CCT Options	Warm White 2800-3200K Bright White 3700-4200K Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available


ILLUMINATED ACOUSTIC RANGE


Reference: AC+LED 27



Illuminated acoustic range. Fully adaptable to suit your requirements.

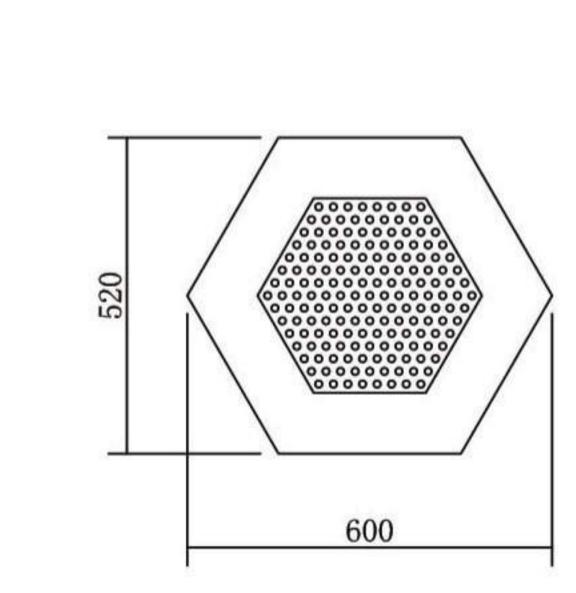

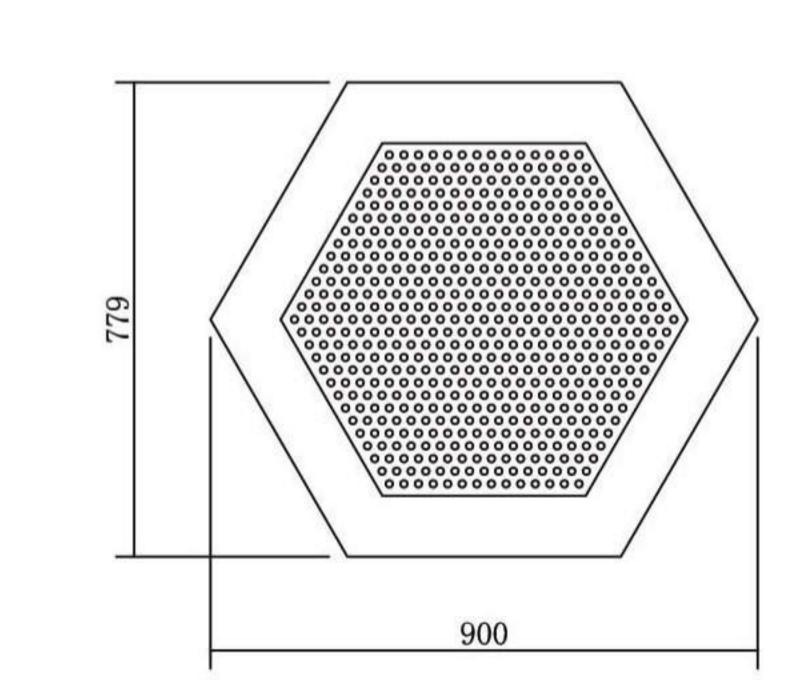

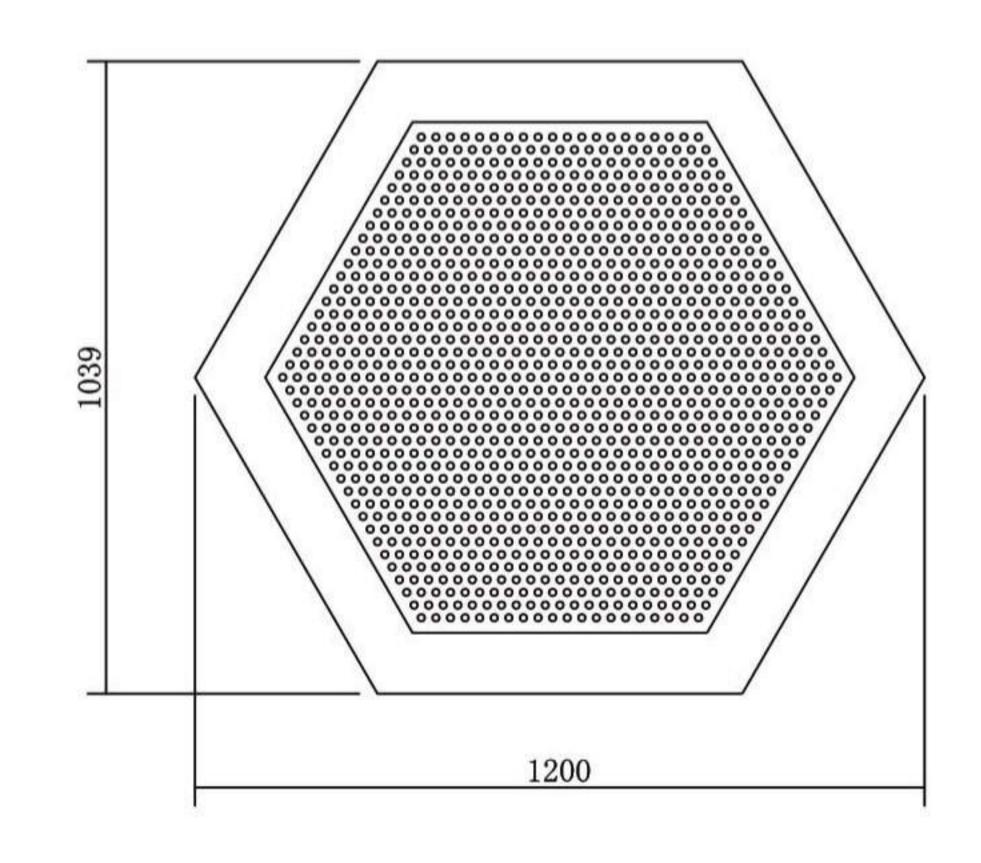


Dimension	L600xW519.6mm	L900xW779.42mm	L1200xW1039.2mm
Dilliciision	(23.6" x 20.5")	(35.4" x 30.7")	(47.2 "x 40.9")
Luminaire Height		88 mm(3.46")	
Product Weight	3.5kg	6 kg	9 kg
Lifespan		50,000 Hours	
Power	25W	42W	56W
Input		AC110 / 220 / 277V	
Lighting Output	1800 lm	3000 lm	4000 lm
	Warm White 2800-3200K		
3 CCT Options	В	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
- Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 28



Illuminated acoustic range. Fully adaptable to suit your requirements.

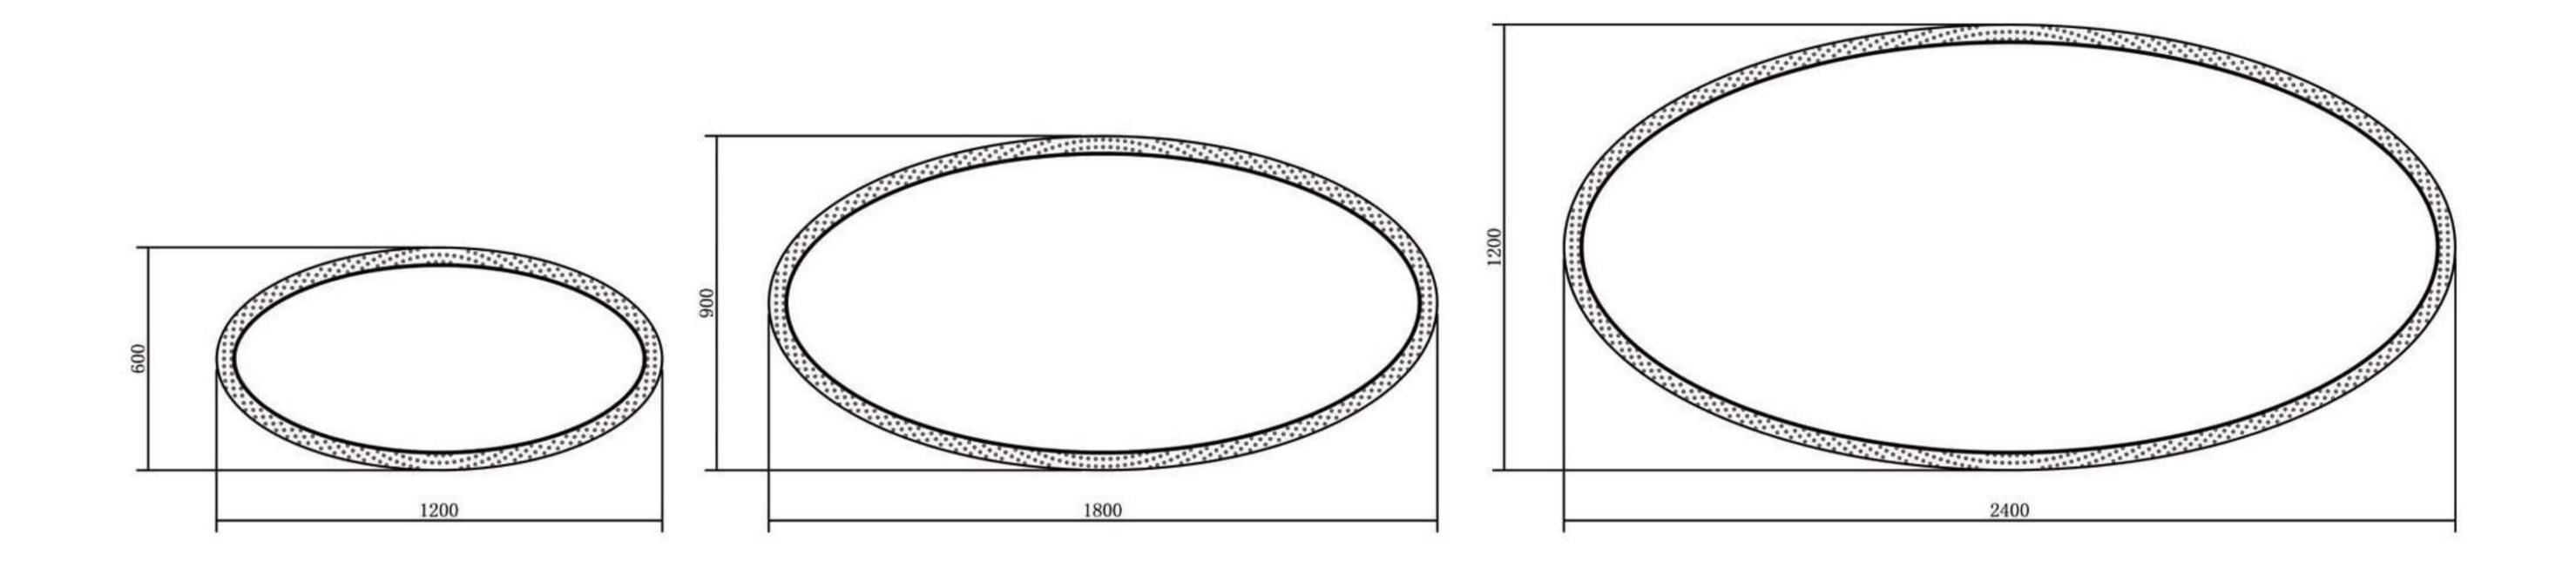

Dimension	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm
Dimension	(23.62" x 47.24")	(35.43 "x 70.86")	(47.24" x 94.48")
Luminaire Height		88 mm(3.46")	
Product Weight	6.5 kg	13 kg	22 kg
Lifespan		50,000 Hours	
Power	66W	115W	200W
Input		AC110 / 220 / 277V	
Lighting Output	4600 lm	8000 lm	14000 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 29



Illuminated acoustic range. Fully adaptable to suit your requirements.

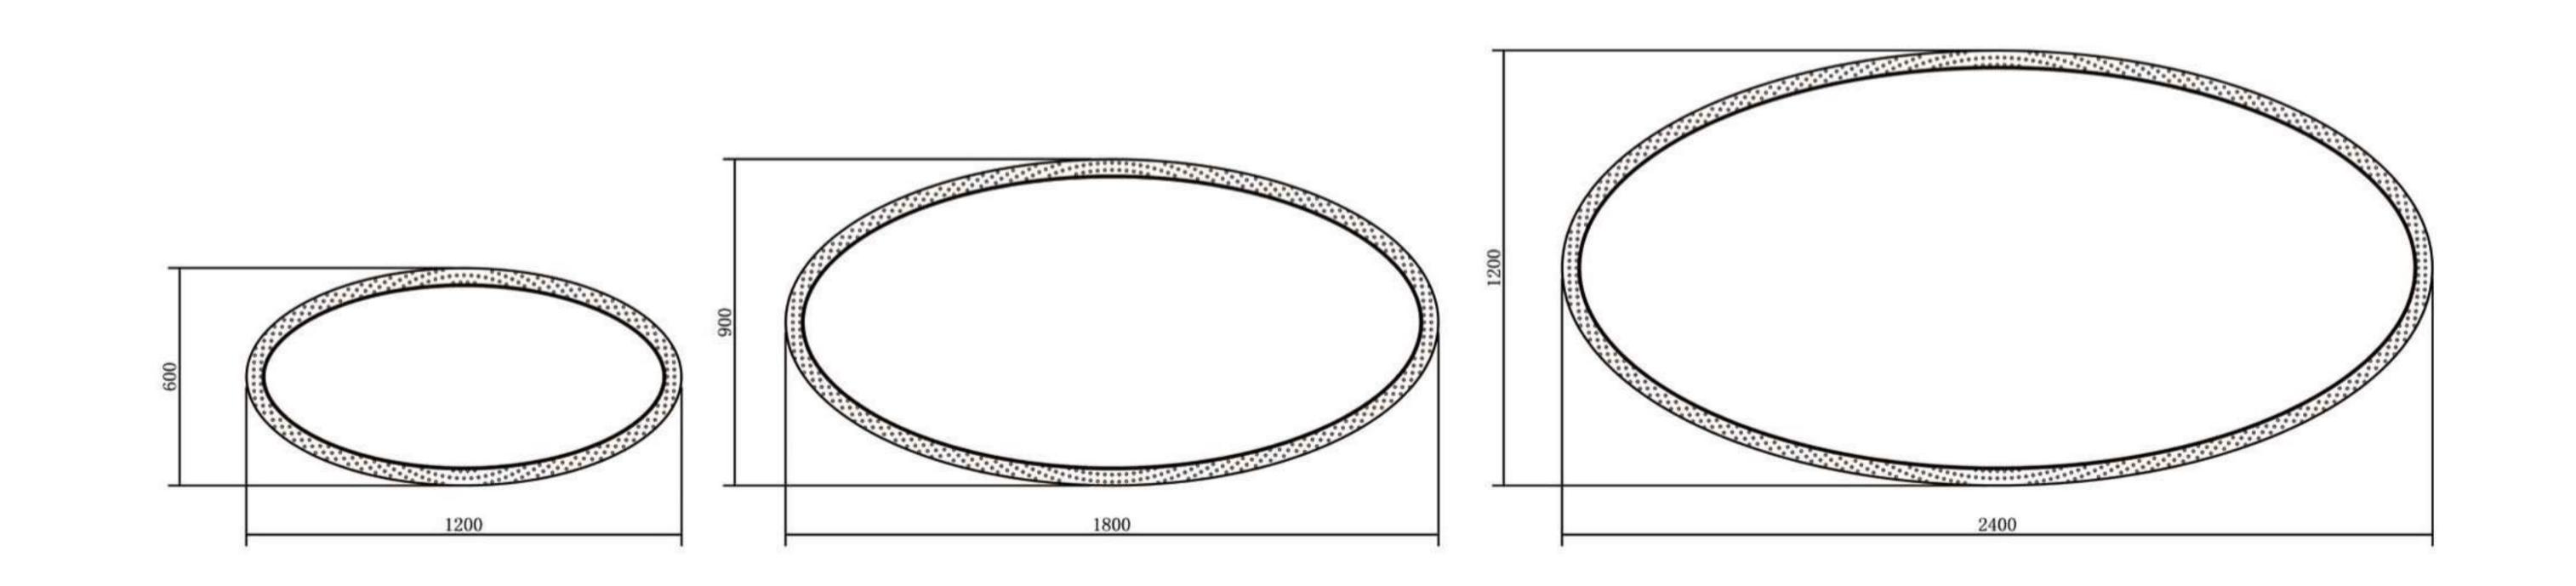


Dimension	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm	
	(23.62" x 47.24")	(35.43" x 70.86")	(47.24 "x 94.48")	
Luminaire Height		88 mm(3.46")		
Product Weight	6.5 kg	13 kg	22 kg	
Lifespan		50,000 Hours		
Power	66W	115W	200W	
Input		AC110 / 220 / 277V		
Lighting Output	4600 lm	8000 lm	14000 lm	
	V	Warm White 2800-3200K		
3 CCT Options	В	3700-4200 Bright White	K	
		Daylight 5600~6500K		
Dimmable	Optional			
Intelligent Control	Optional			
Warranty		3 Years		

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 30



Illuminated acoustic range. Fully adaptable to suit your requirements.

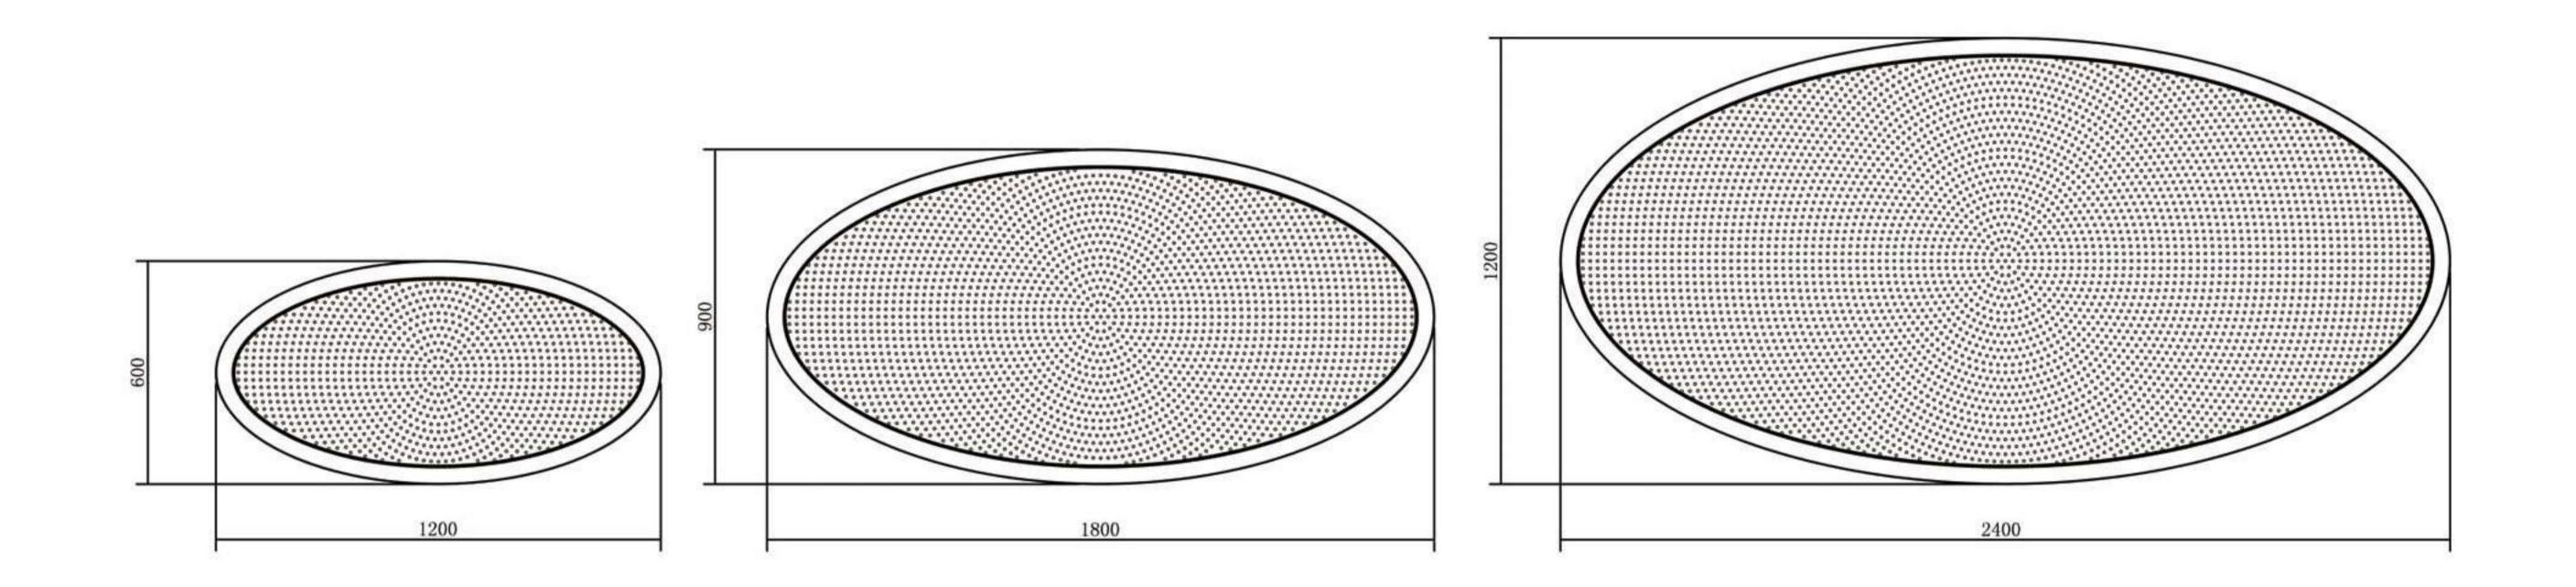

Dimension	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm
Dimension	(23.62 x 47.24")	(35.43 x 70.86")	(47.24 x 94.48")
Luminaire Height		88 mm(3.46")	
Product Weight	6.5 kg	9 kg	18.5 kg
Lifespan		50,000 Hours	
Power	42W	60W	91W
Input	AC110 / 220 / 277V		
Lighting Output	3000 lm	4200 lm	6400 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 31



Illuminated acoustic range. Fully adaptable to suit your requirements.

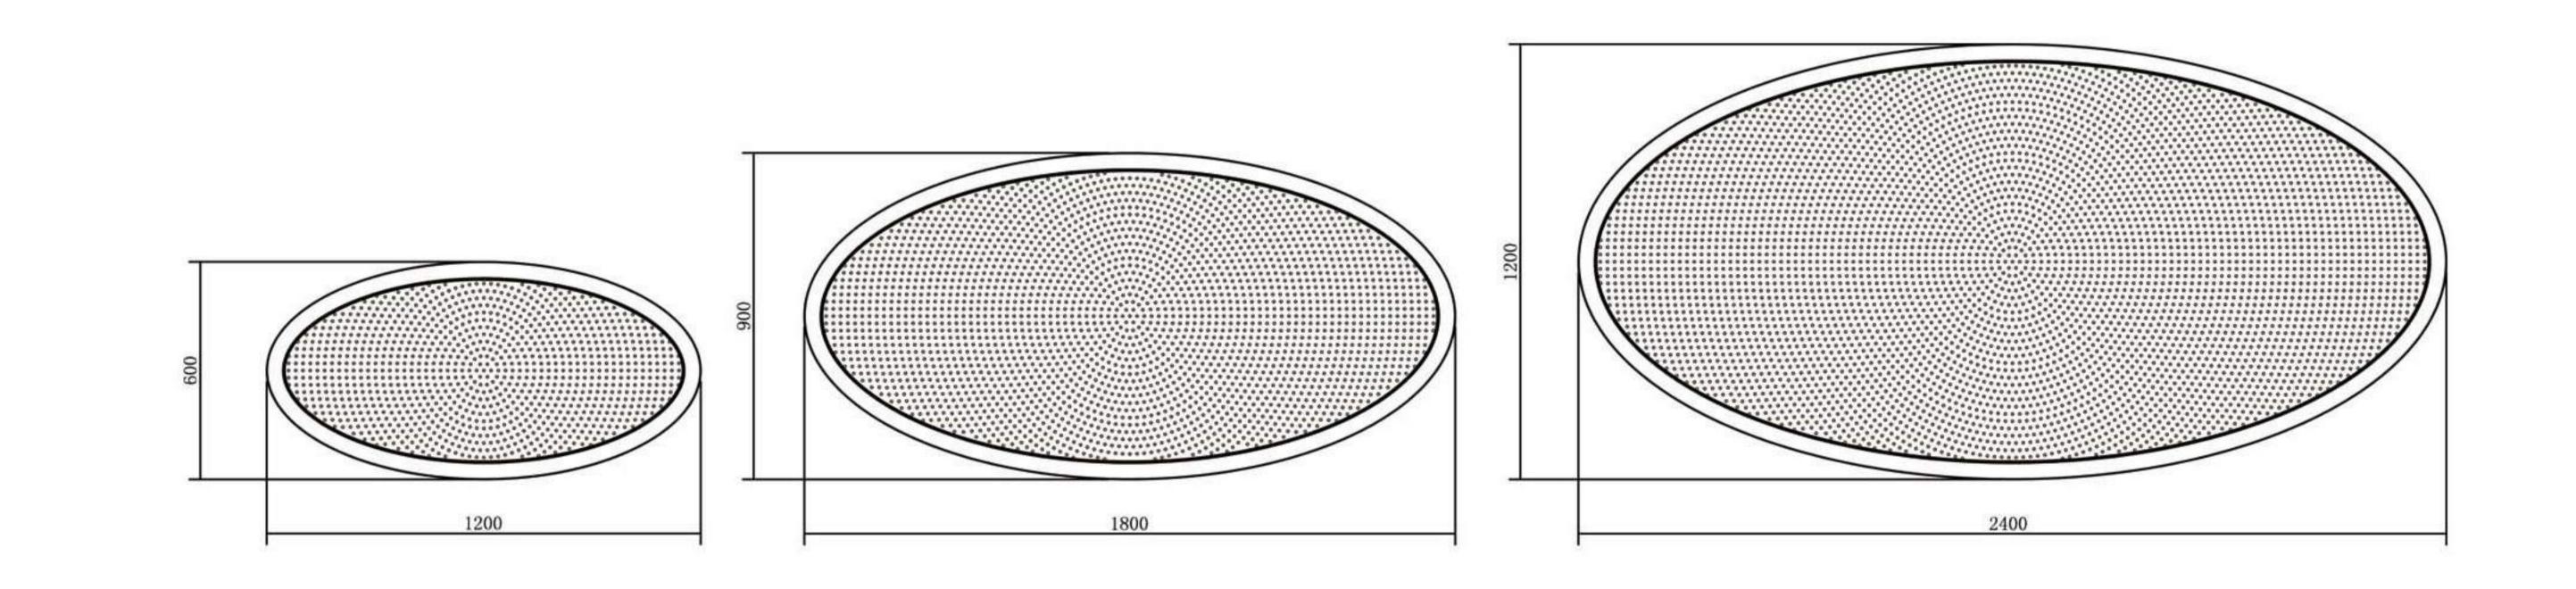


	Dia 600 v 1000mm	Dia 000 v 1000mm	Dia 1000 v 0100mm
Dimension	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm
	(23.62" x 47.24")	(35.43 "x 70.86")	(47.24 "x 94.48")
Luminaire Height		88 mm(3.46")	
Product Weight	6.5 kg	9 kg	18.5 kg
Lifespan		50,000 Hours	
Power	42W	60W	91W
Input		AC110 / 220 / 277V	
Lighting Output	3000 lm	4200 lm	6400 lm
	٧	Varm White 2800-3200	K
3 CCT Options	Е	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 32



Illuminated acoustic range. Fully adaptable to suit your requirements.

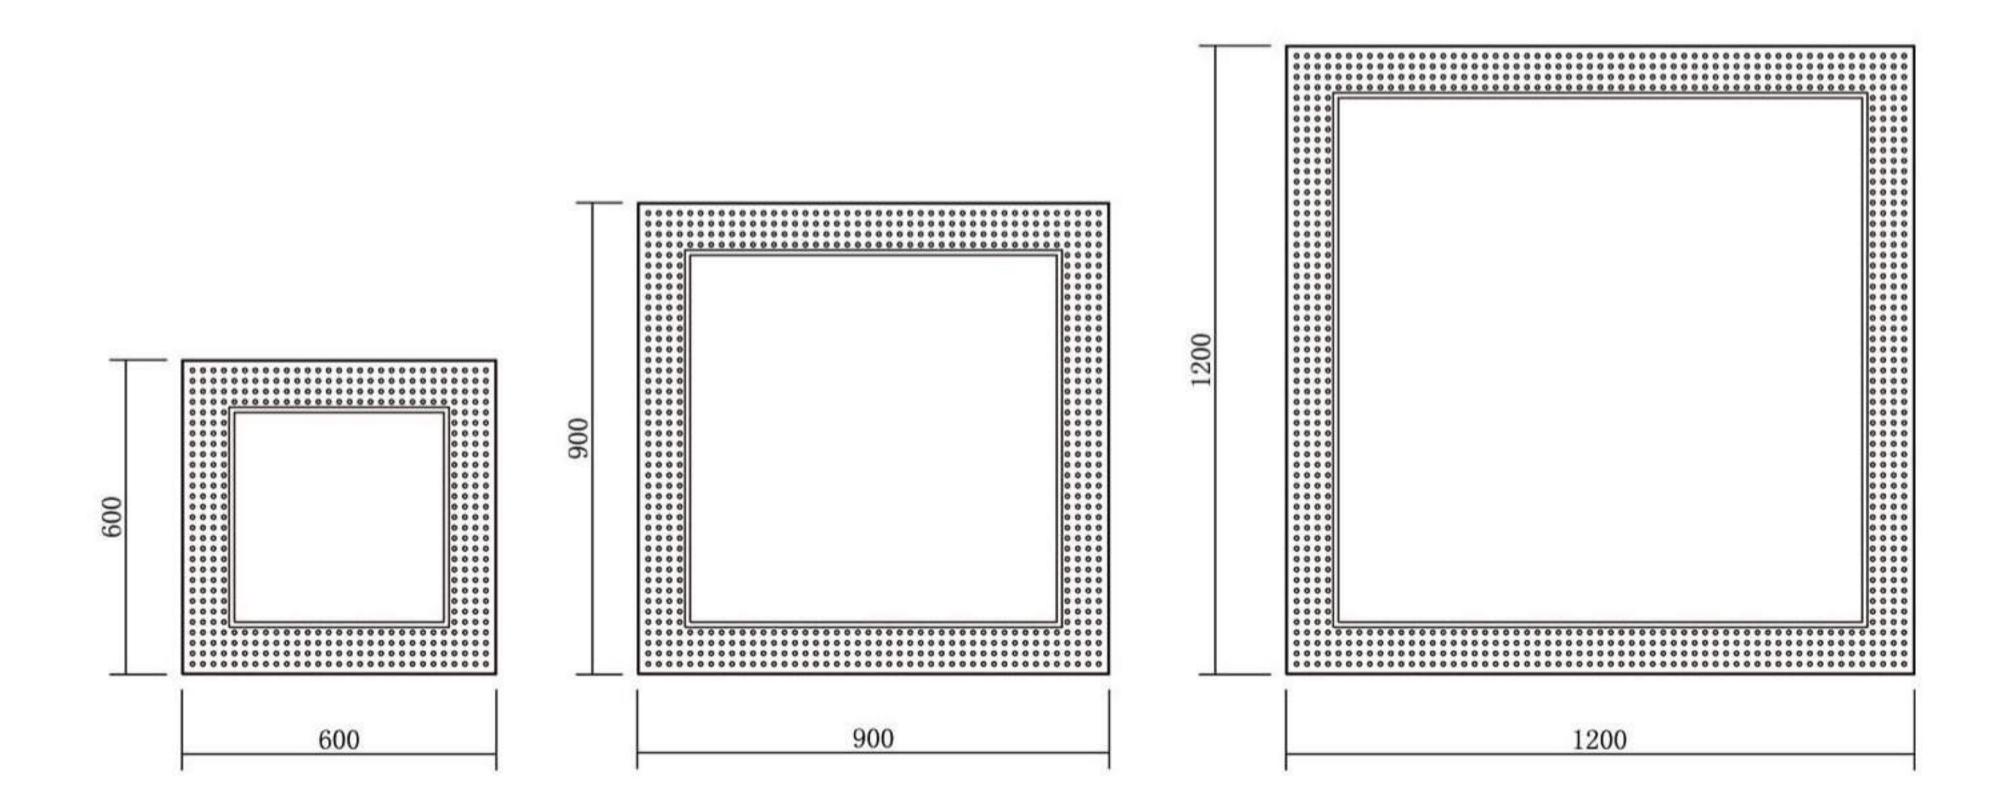

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
	(23.6" x 23.6")	(35.43 "x 35.43")	(47.24 "x 47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	5kg	9kg	14.5kg
Lifespan		50,000 Hours	
Power	38W	80W	108W
Input	AC110 / 220 / 277V		
Lighting Output	2700 lm	5600 lm	7600 lm
	V	Varm White 2800-3200	K
3 CCT Options	E	Bright White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 33



Illuminated acoustic range. Fully adaptable to suit your requirements.

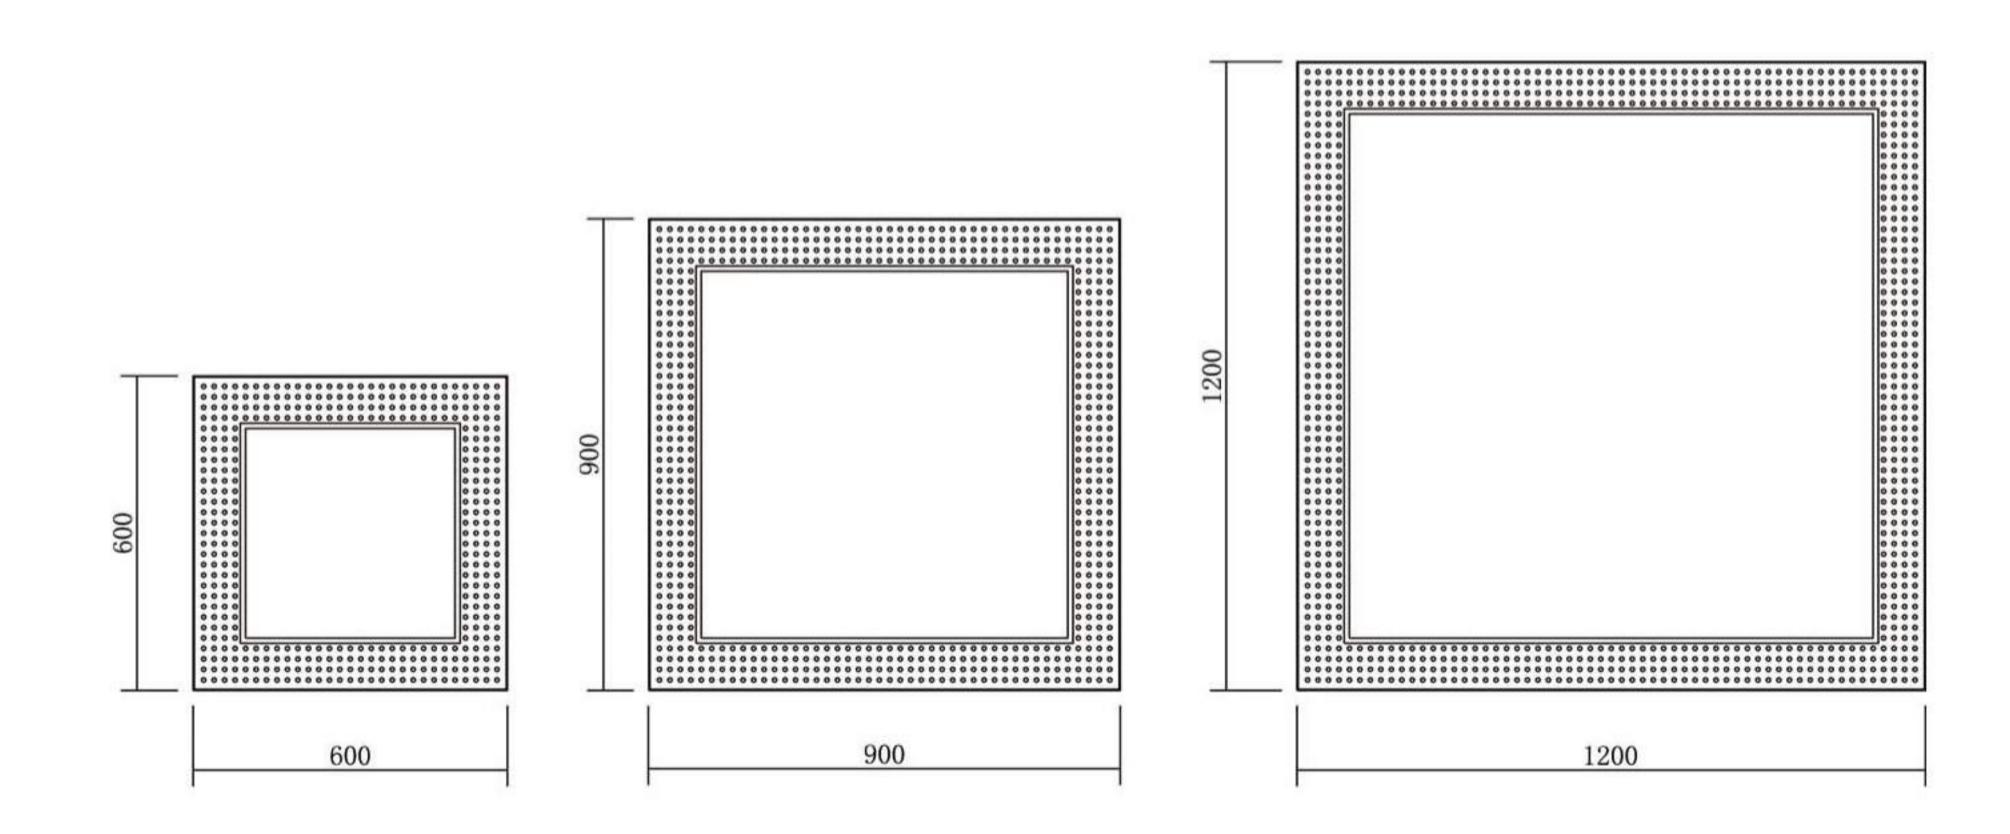


Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
Difficition	(23.6 "x 23.6")	(35.43" x 35.43")	(47.24" x 47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	5kg	9kg	15kg
Lifespan		50,000 Hours	
Power	38W	80W	108W
Input		AC110 / 220 / 277V	
Lighting Output	2700 lm	5600 lm	7600 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 34



Illuminated acoustic range. Fully adaptable to suit your requirements.

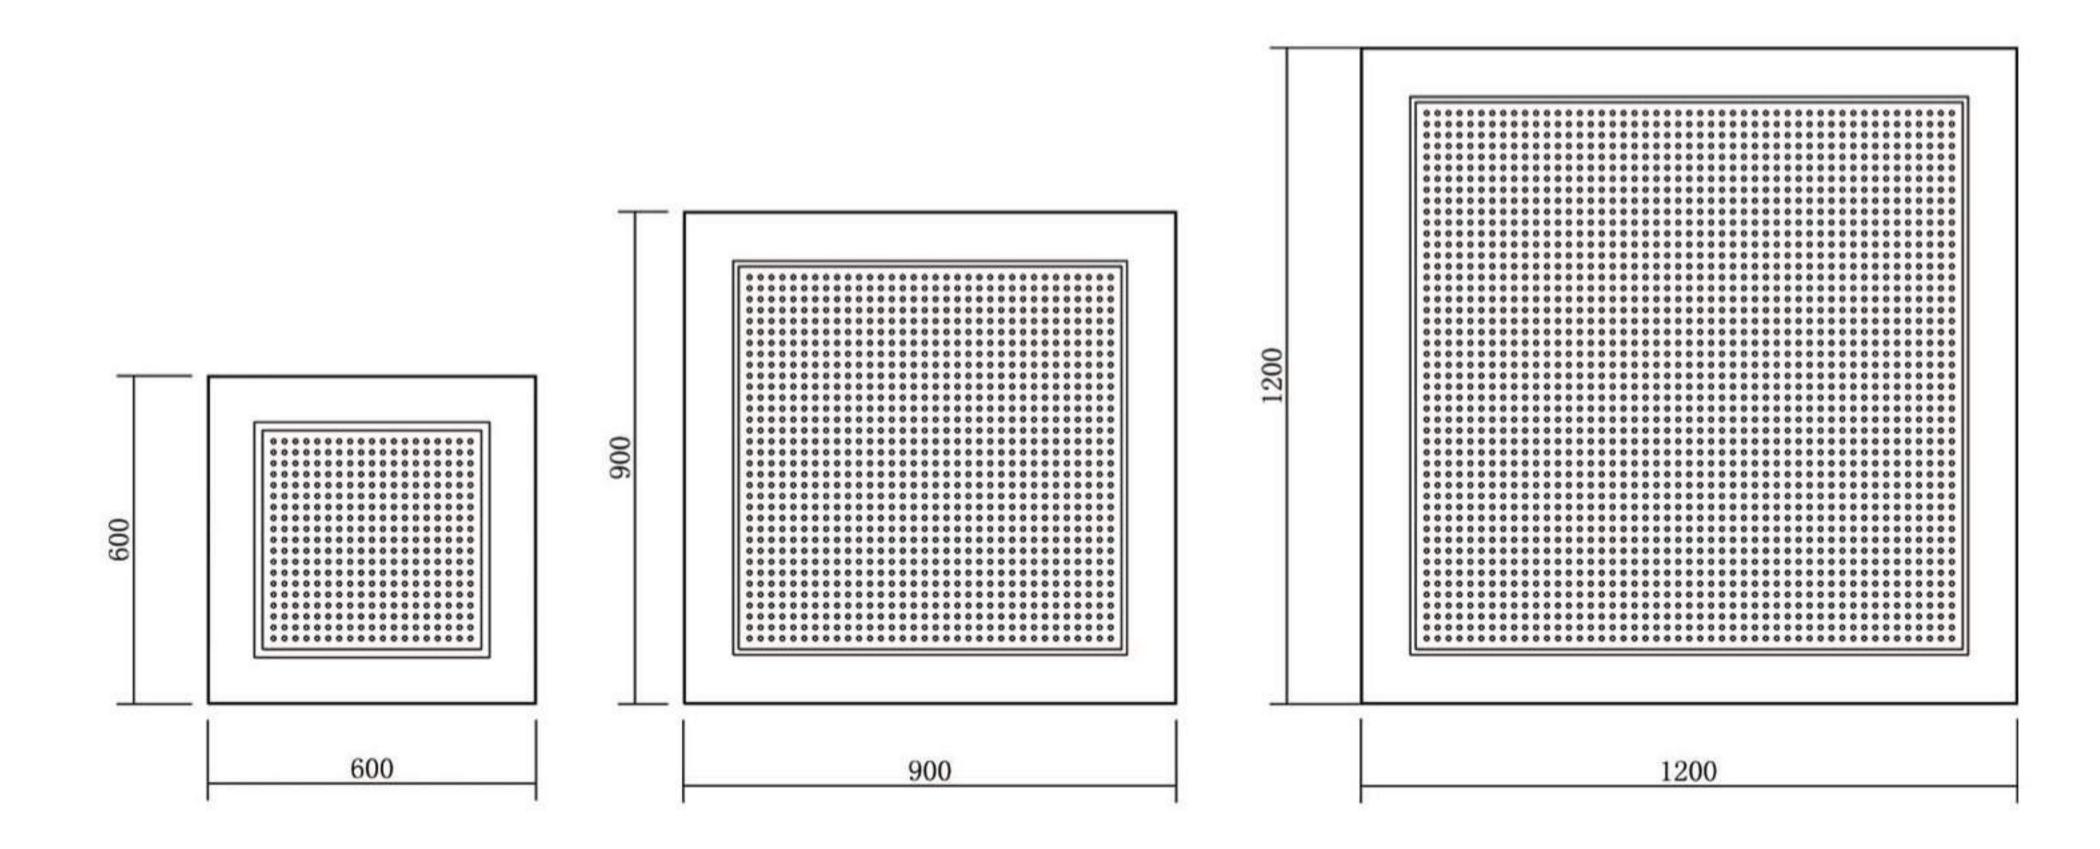

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
DIIIICIISIUII	(23.6 "x 23.6")	(35.43"x 35.43")	(47.24" x 47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	5 kg	7.5 kg	12.5 kg
Lifespan		50,000 Hours	
Power	35W	56W	70W
Input		AC110 / 220 / 277V	
Lighting Output	2500 lm	4000 lm	5000 lm
	Warm White 2800-3200K		
3 CCT Options	E	3right White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty		3 Years	

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 35



Illuminated acoustic range. Fully adaptable to suit your requirements.

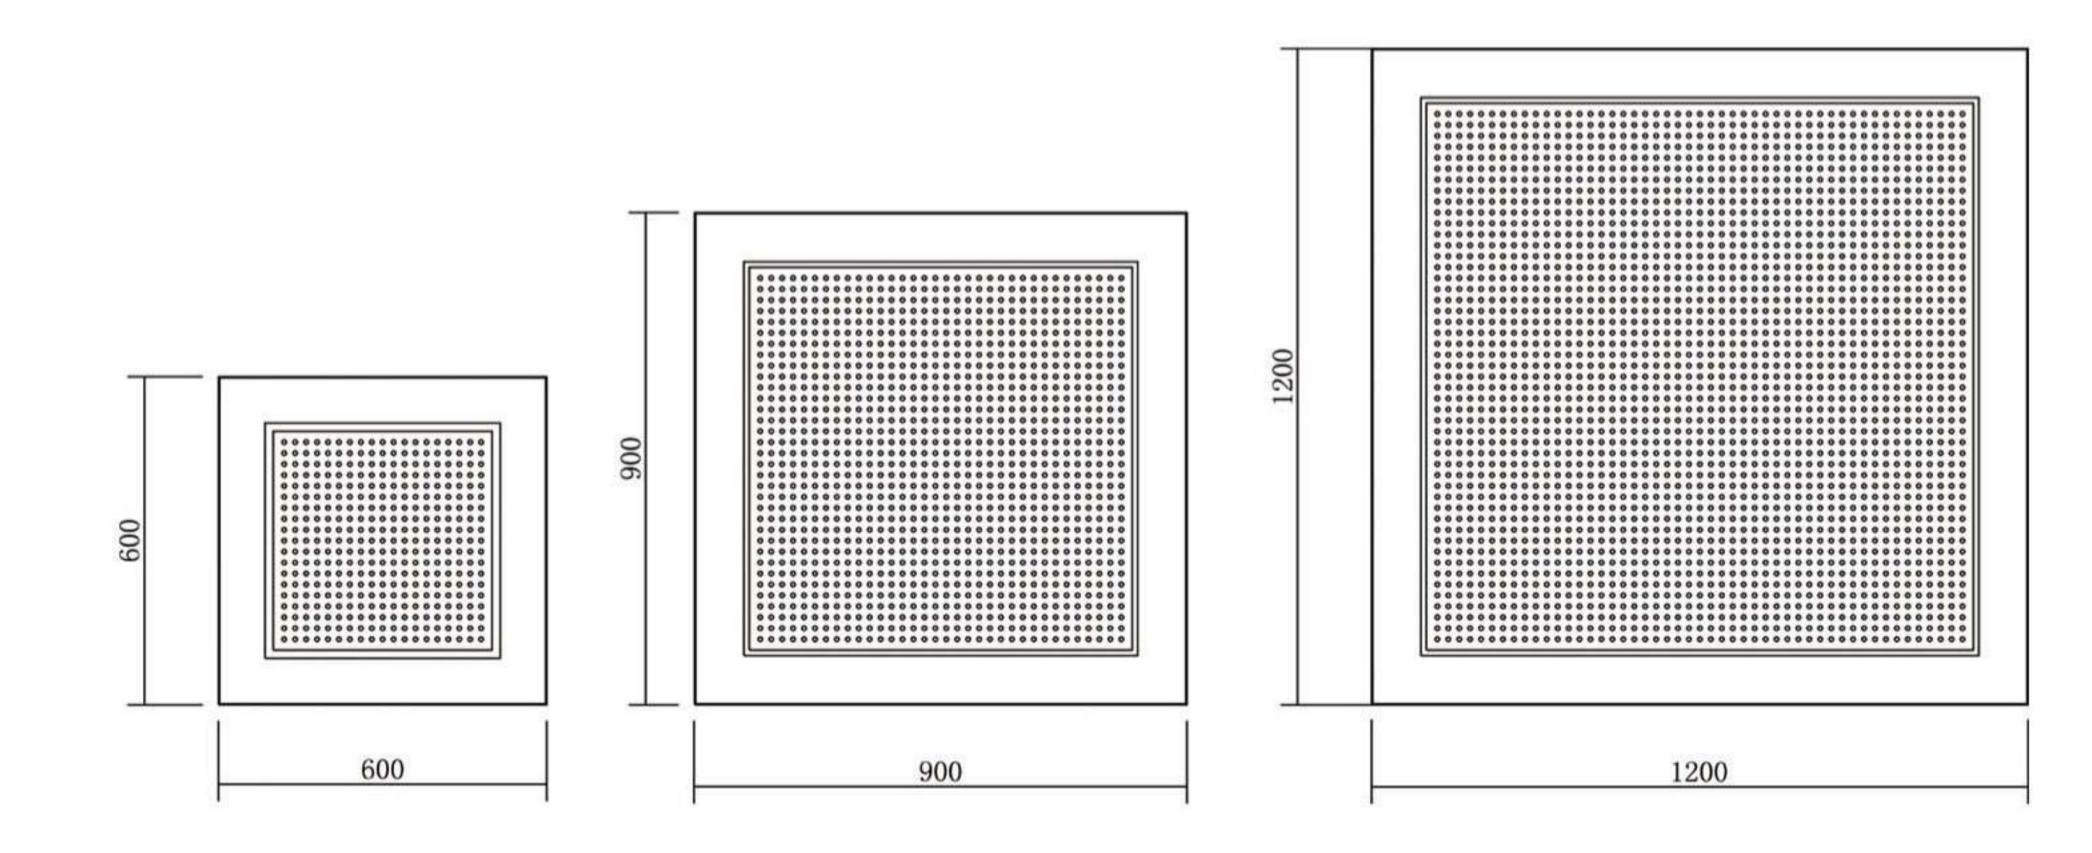


Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm	
Dillicitoti	(23.6" x 23.6")	(35.43 "x 35.43")	(47.24" x 47.24")	
Luminaire Height		88 mm(3.46")		
Product Weight	5 kg	7.5 kg	12.5 kg	
Lifespan		50,000 Hours		
Power	35W	56W	70W	
Input		AC110 / 220 / 277V		
Lighting Output	2500 lm	4000 lm	5000 lm	
	Warm White 2800-3200K			
3 CCT Options	E	3right White 3700-4200	K	
		Daylight 5600~6500K		
Dimmable	Optional			
Intelligent Control	Optional			
Warranty		3 Years		

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 36



Illuminated acoustic range. Fully adaptable to suit your requirements.

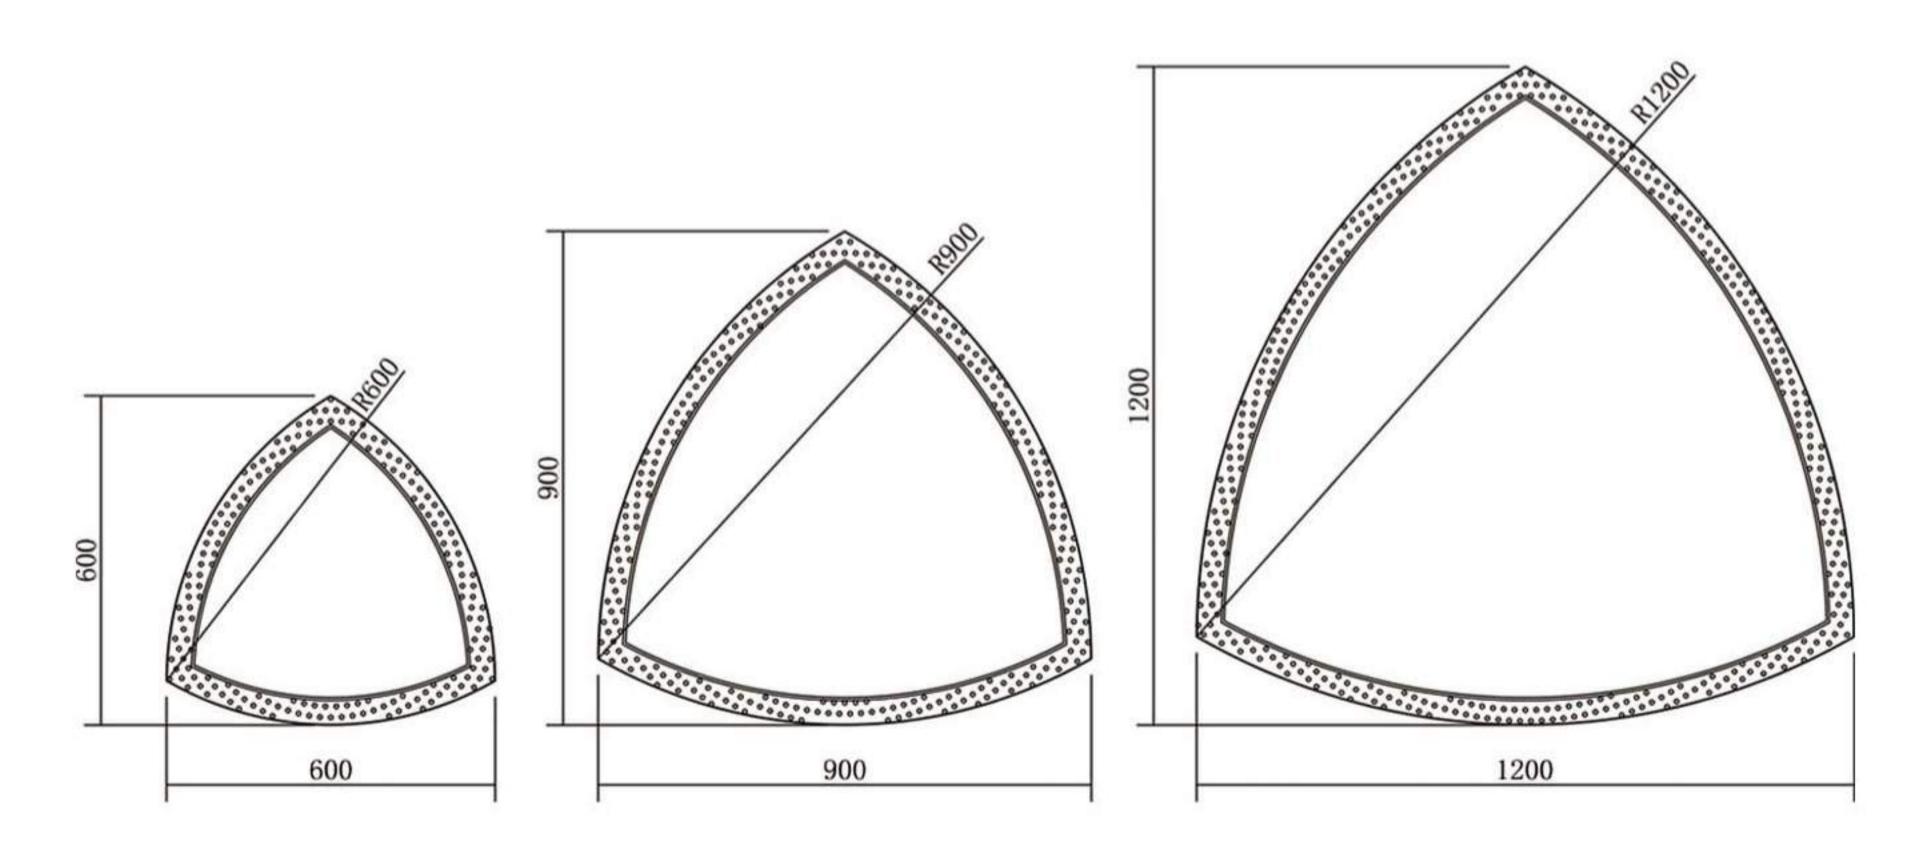

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
	(23.6 "x 23.6")	(35.43 "x 35.43")	(47.24 "x 47.24")
Luminaire Height		88 mm(3.46")	
Product Weight	3.5kg	7kg	11kg
Lifespan		50,000 Hours	
Power	21W	45W	77W
Input		AC110 / 220 / 277V	
Lighting Output	1500 lm	3200 lm	5400 lm
	Warm White 2800-3200K		
3 CCT Options	E	Bright White 3700-4200	K
	Daylight 5600~6500K		
Dimmable	Optional		
Intelligent Control	Optional		
Warranty	3 Years		

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 37



Illuminated acoustic range. Fully adaptable to suit your requirements.

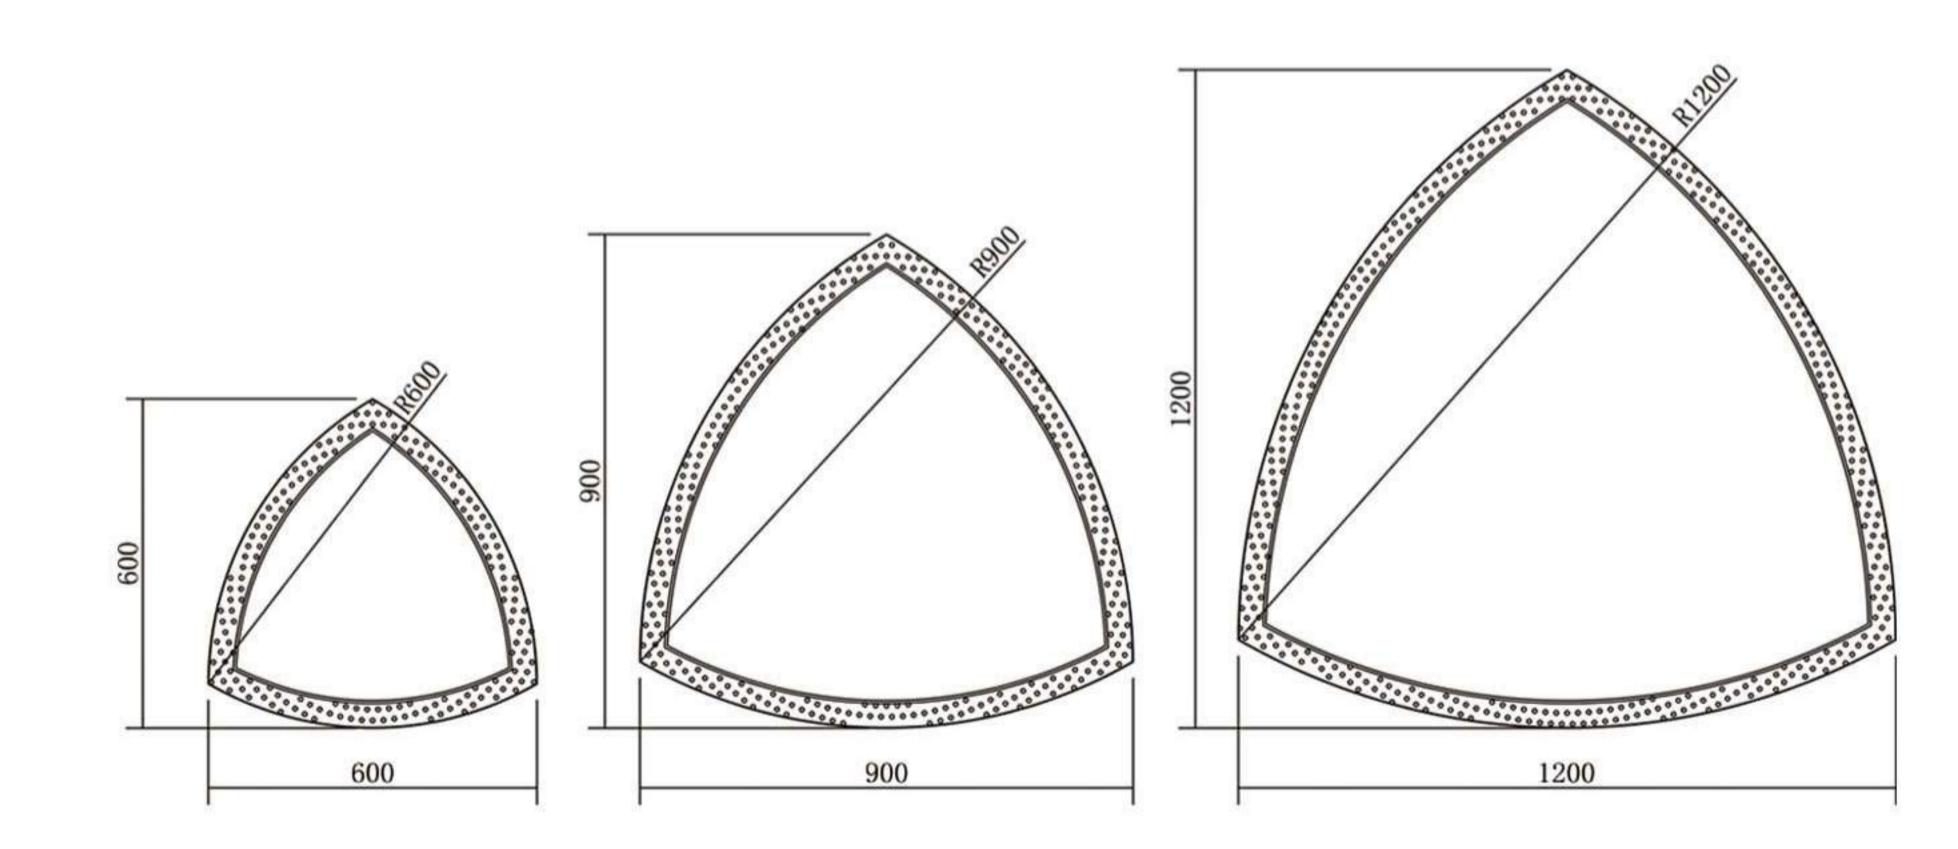


Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm	
	(23.6 "x 23.6")	(35.43 "x 35.43")	(47.24" x 47.24")	
Luminaire Height	88 mm(3.46")			
Product Weight	3.5kg	7kg	11kg	
Lifespan		50,000 Hours		
Power	21W	45W	77W	
Input	AC110 / 220 / 277V			
Lighting Output	1500 lm 3200 lm 5400 lm			
	Warm White 2800-3200K			
3 CCT Options	Bright White 3700-4200K			
	Daylight 5600~6500K			
Dimmable	Optional			
Intelligent Control	Optional			
Warranty	3 Years			

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

Reference: AC+LED 38



Illuminated acoustic range. Fully adaptable to suit your requirements.

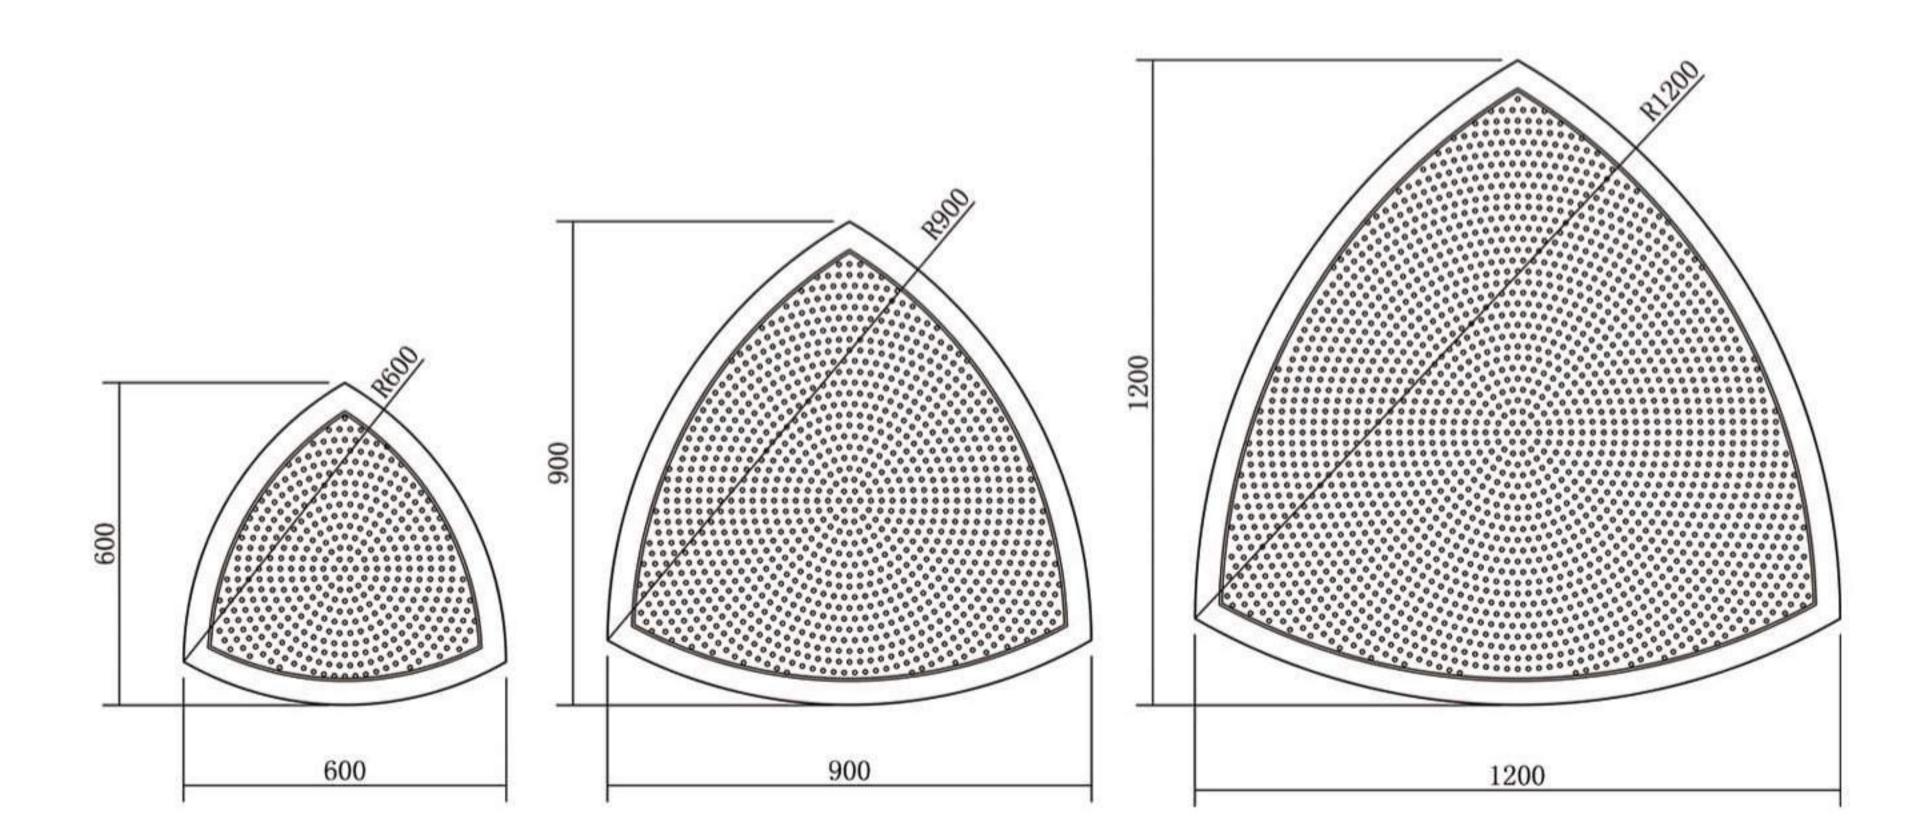

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm	
	(23.6" x 23.6")	(35.43" x 35.43")	(47.24" x 47.24")	
Luminaire Height	88 mm(3.46")			
Product Weight	4kg	5.5kg	9.5kg	
Lifespan	50,000 Hours			
Power	28W	42W	56W	
Input	AC110 / 220 / 277V			
Lighting Output	2000 lm 3000 lm 4000 lm			
	Warm White 2800-3200K Bright White 3700-4200K			
3 CCT Options				
	Daylight 5600~6500K			
Dimmable	Optional			
Intelligent Control	Optional			
Warranty	3 Years			

FEATURES:


- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ILLUMINATED ACOUSTIC RANGE

Reference: AC+LED 39



Illuminated acoustic range. Fully adaptable to suit your requirements.

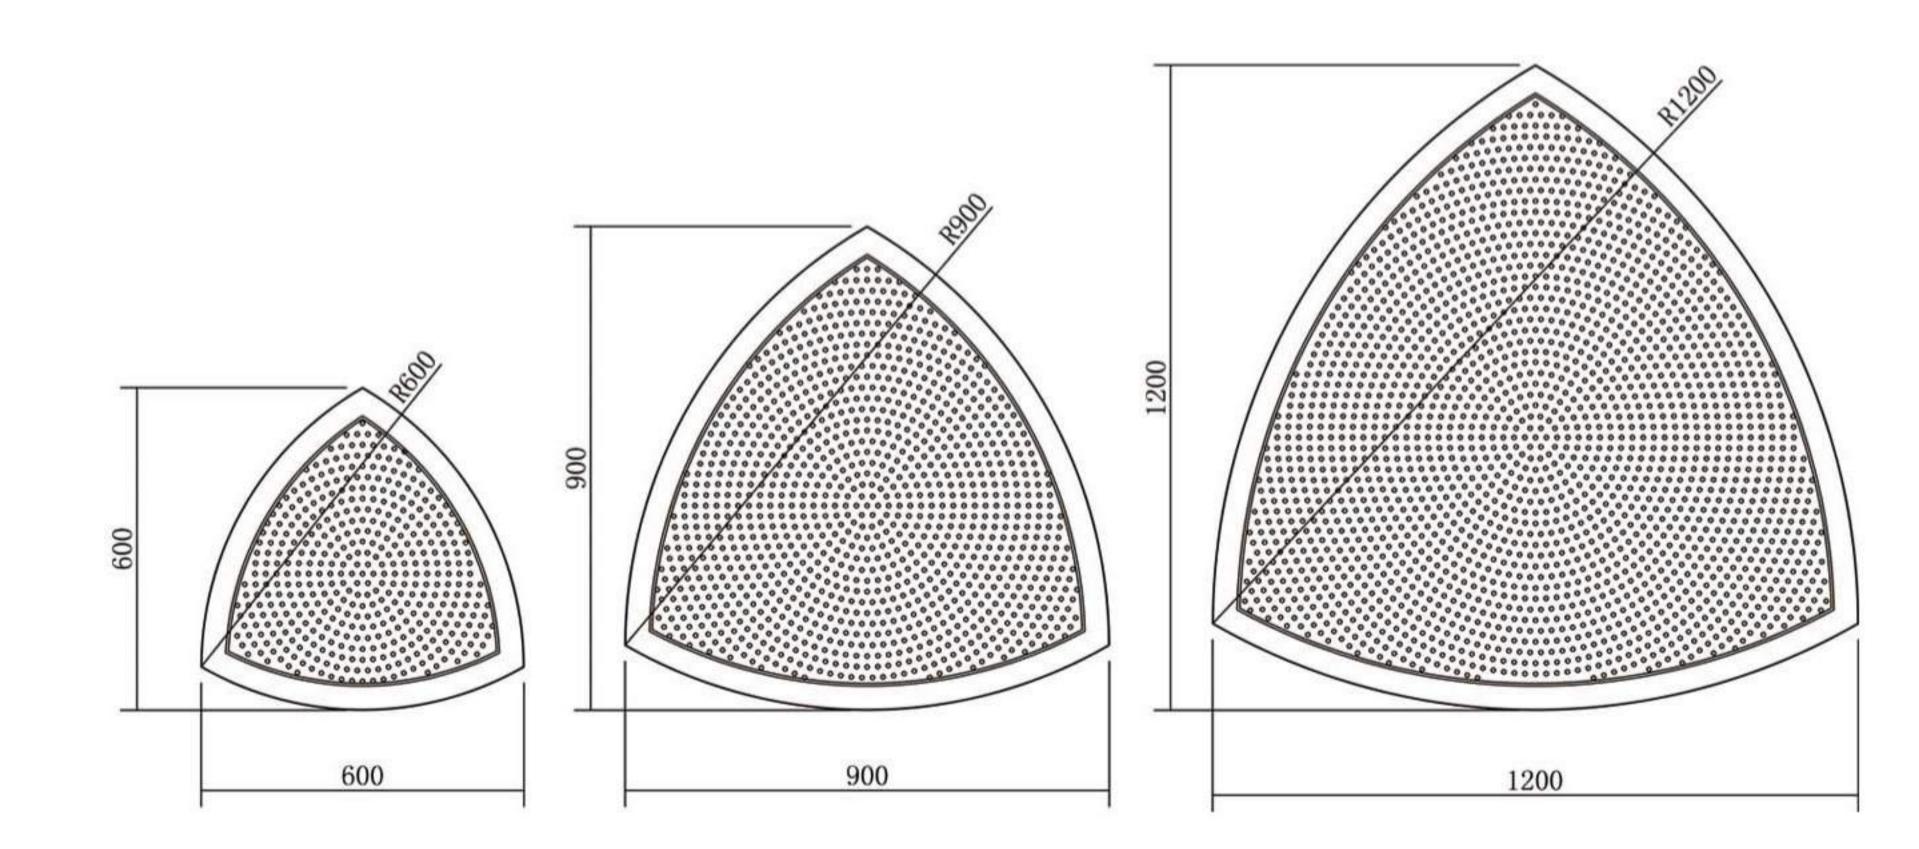


Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm	
Difficitation	(23.6 "x 23.6")	(35.43 "x 35.43")	(47.24 "x 47.24")	
Luminaire Height		88 mm(3.46")		
Product Weight	4kg	5.5kg	9.5kg	
Lifespan	50,000 Hours			
Power	28W	42W	56W	
Input	AC110 / 220 / 277V			
Lighting Output	2000 lm 3000 lm 4000 lm			
	Warm White 2800-3200K			
3 CCT Options	Bright White 3700-4200K			
	Daylight 5600~6500K			
Dimmable	Optional			
Intelligent Control	Optional			
Warranty	3 Years			

- Innovative LED + Acoustics
- Simple and elegant appearance
 High quality aluminium housing ensuring efficient heat dissipation
 Durable LED performance
- Uniformed LED diffusion
- Insect and dust free
- Eco-friendly
- Various mounting options available
 Fully bespoke options available

ACOUSTIC RANGE Reference: AC 01



Acoustic only range. Fully adaptable to suit your requirements.

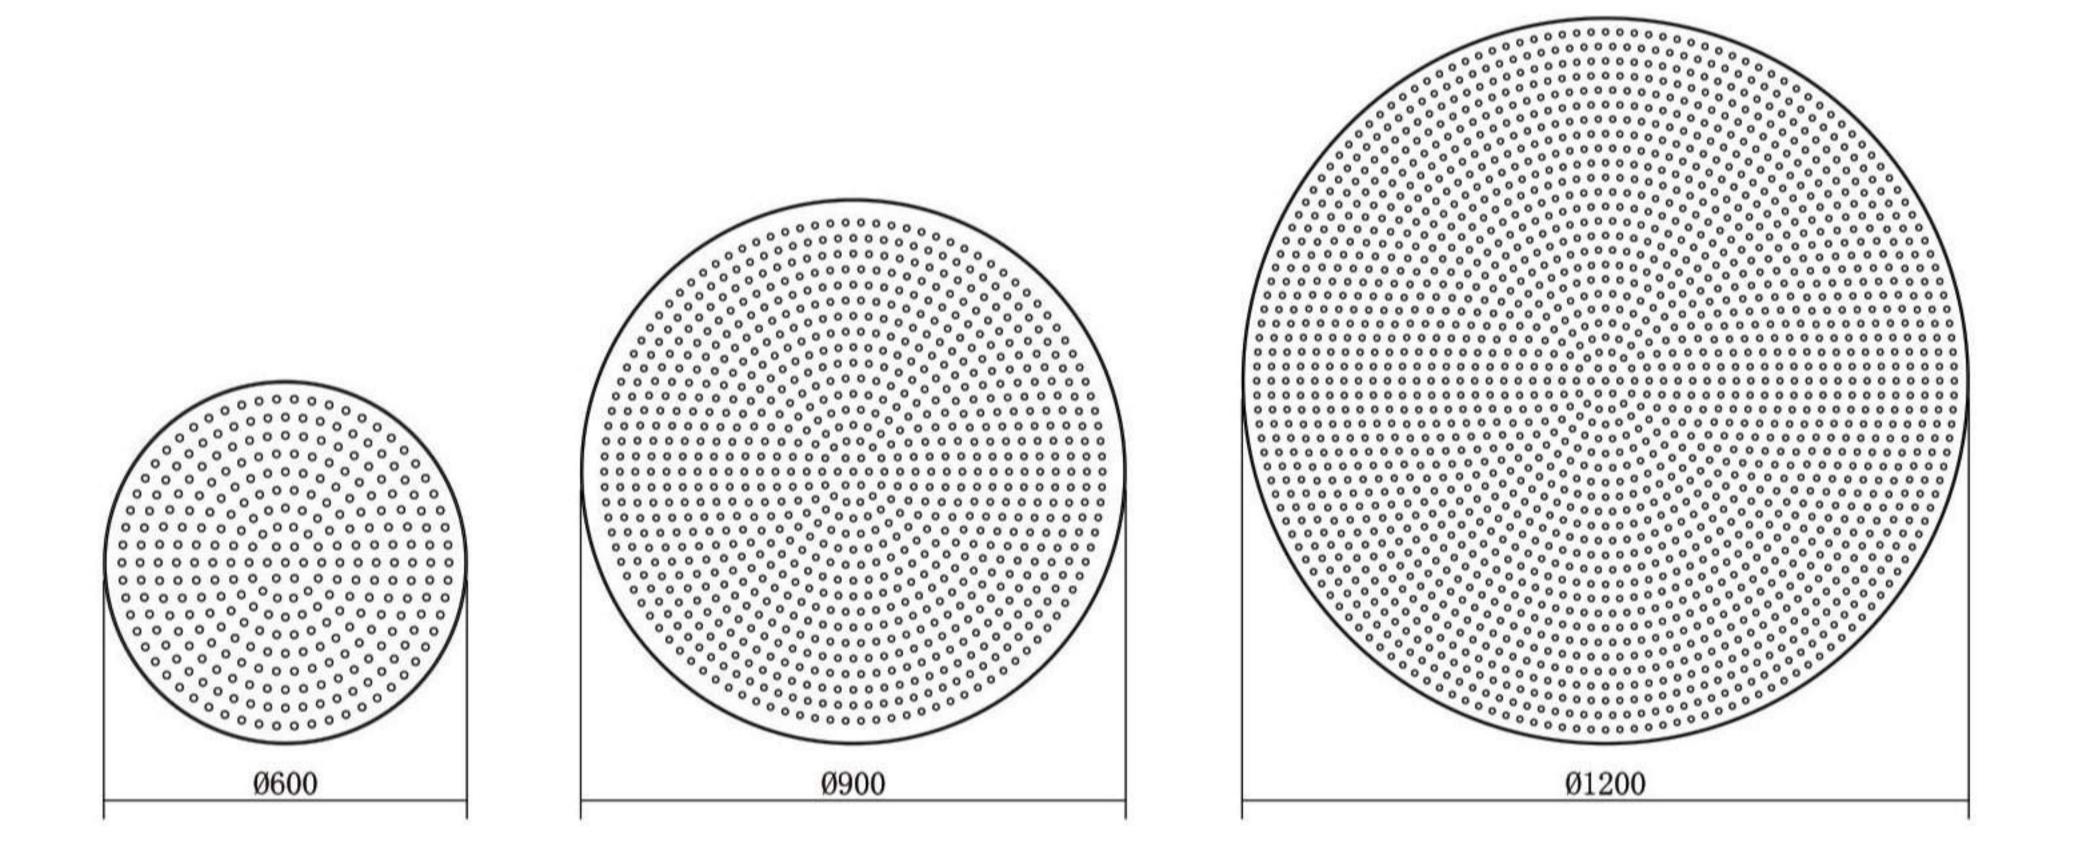

FEATURES:


- Aluminium housingPowder coated to RAL of choice
- Various mounting options available
 Fully bespoke options available


Dimension	Dia.600mm (23.62")	Dia.900mm (35.43")	Dia. 1200mm (47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	2.5 kg	5 kg	8 kg


ACOUSTIC RANGE Reference: AC 02



Acoustic only range. Fully adaptable to suit your requirements.

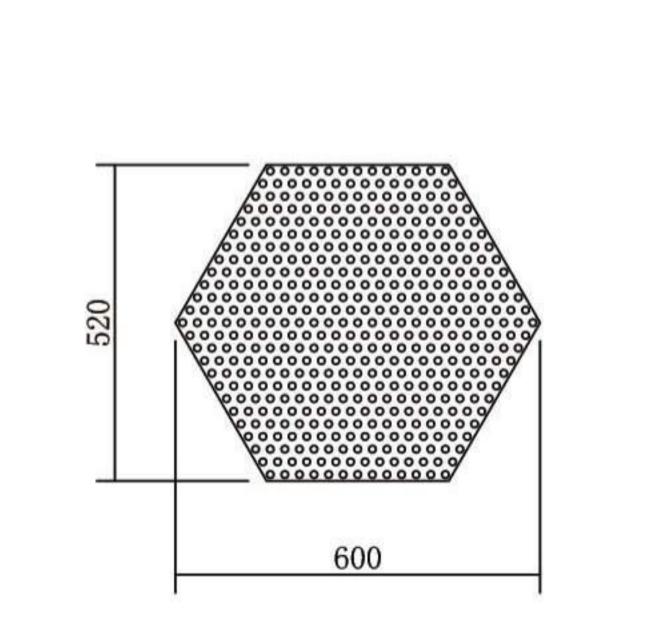

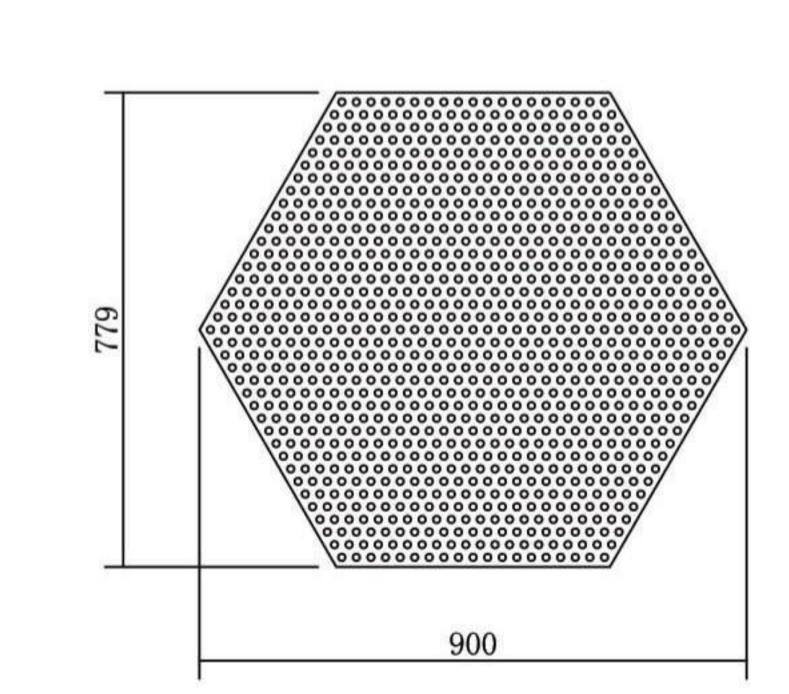

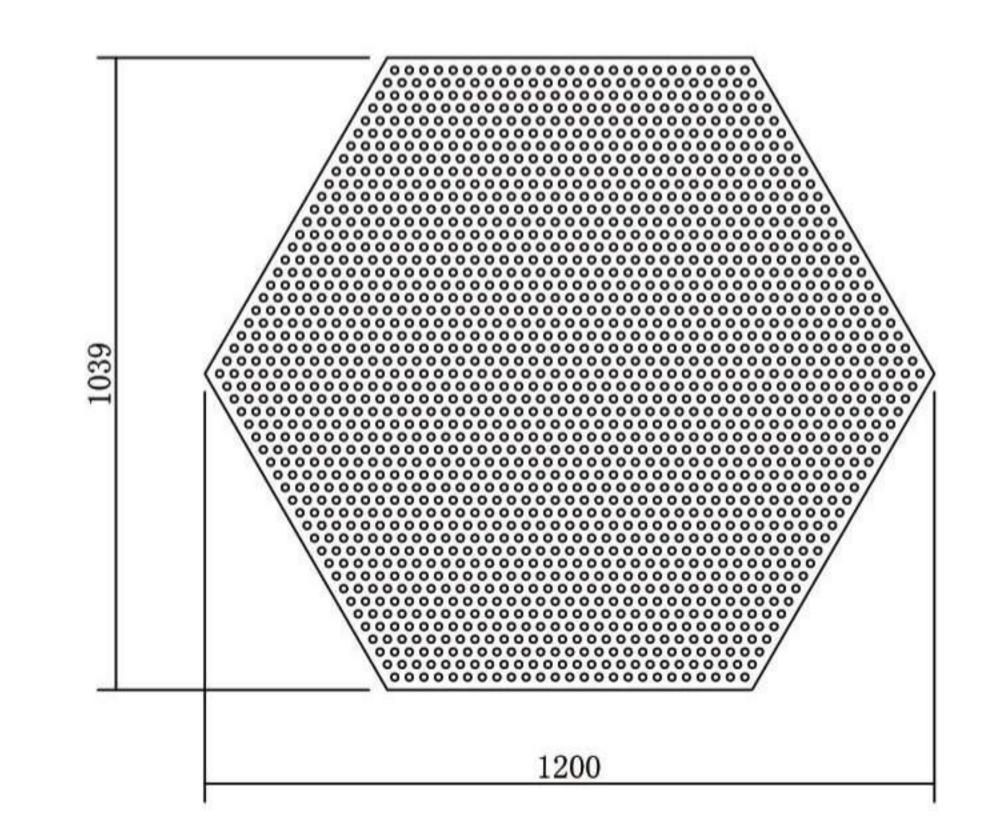


- Aluminium housingPowder coated to RAL of choice
- Various mounting options available
 Fully bespoke options available

Dimension	L600xW519.6mm (23.6 "x 20.5")	L900xW779.42mm (35.4" x 30.7")	L1200xW1039.2mm (47.2" x 40.9")
Luminaire Height	88 mm(3.46")		
Product Weight	2 kg	4 kg	7 kg

ACOUSTIC RANGE Reference: AC 03



Acoustic only range. Fully adaptable to suit your requirements.

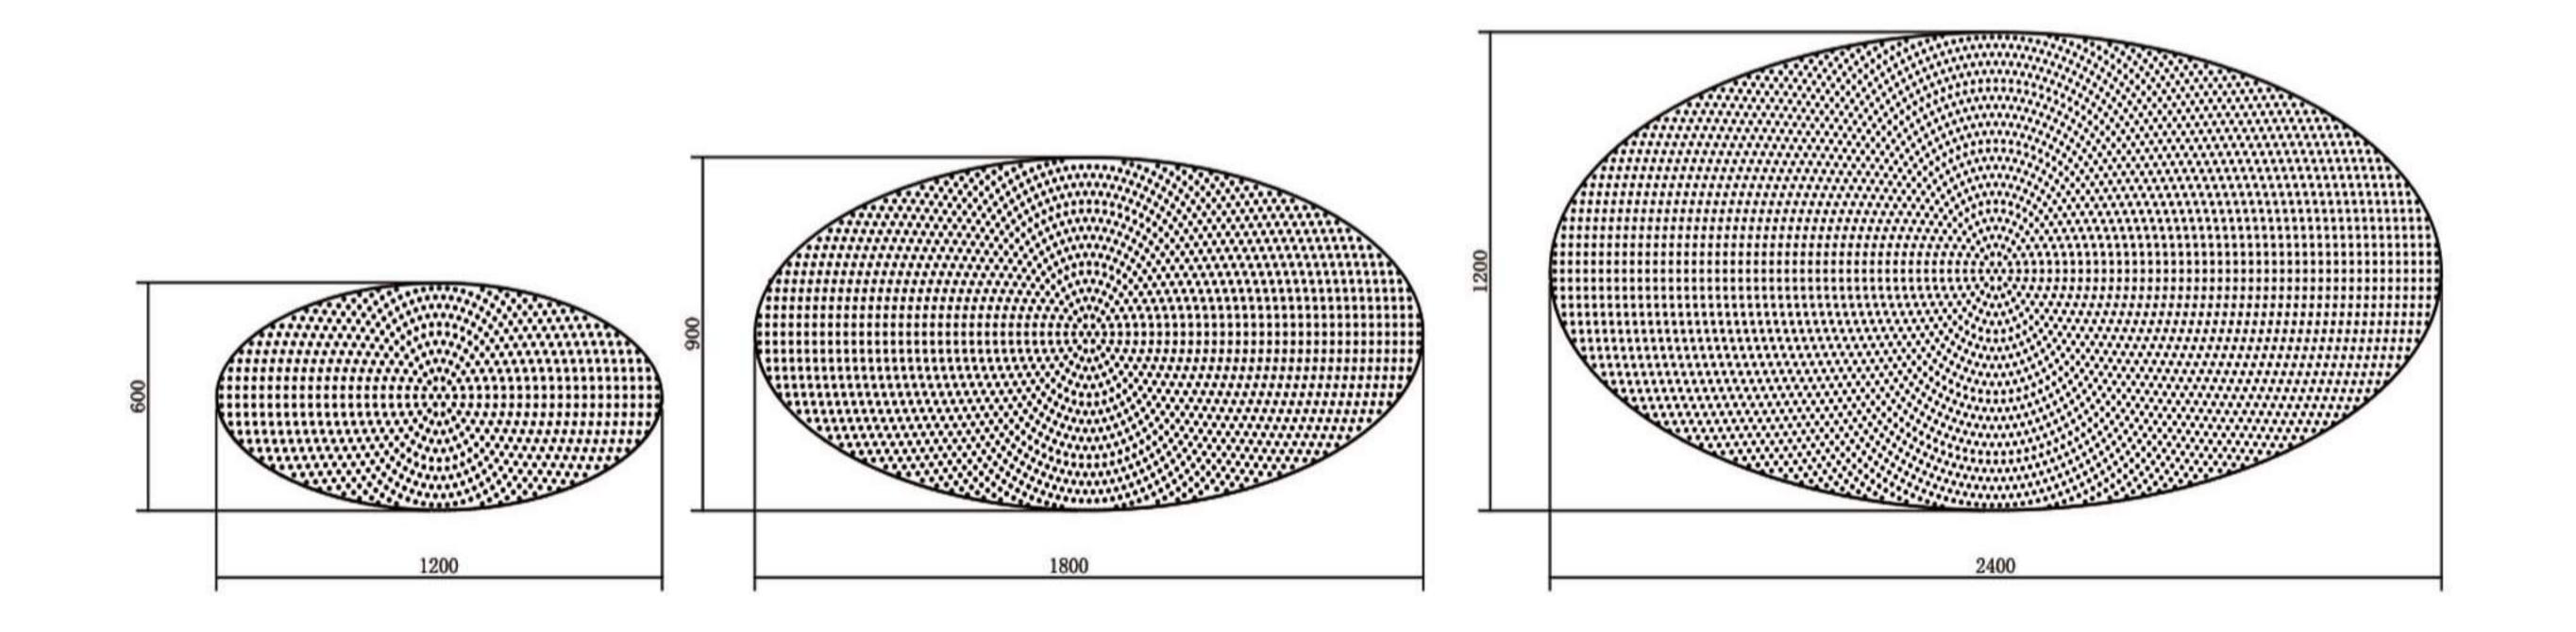

FEATURES:


- Aluminium housingPowder coated to RAL of choice
- Various mounting options available
 Fully bespoke options available

Dimonoion	Dia.600 x 1200mm	Dia.900 x 1800mm	Dia.1200 x 2400mm
Dimension	(23.62" x 47.24")	(35.43" x 70.86")	(47.24" x 94.48")
Luminaire Height	88 mm(3.46")		
Product Weight	4.5 kg	9 kg	15 kg

ACOUSTIC RANGE Reference: AC 04



Acoustic only range. Fully adaptable to suit your requirements.

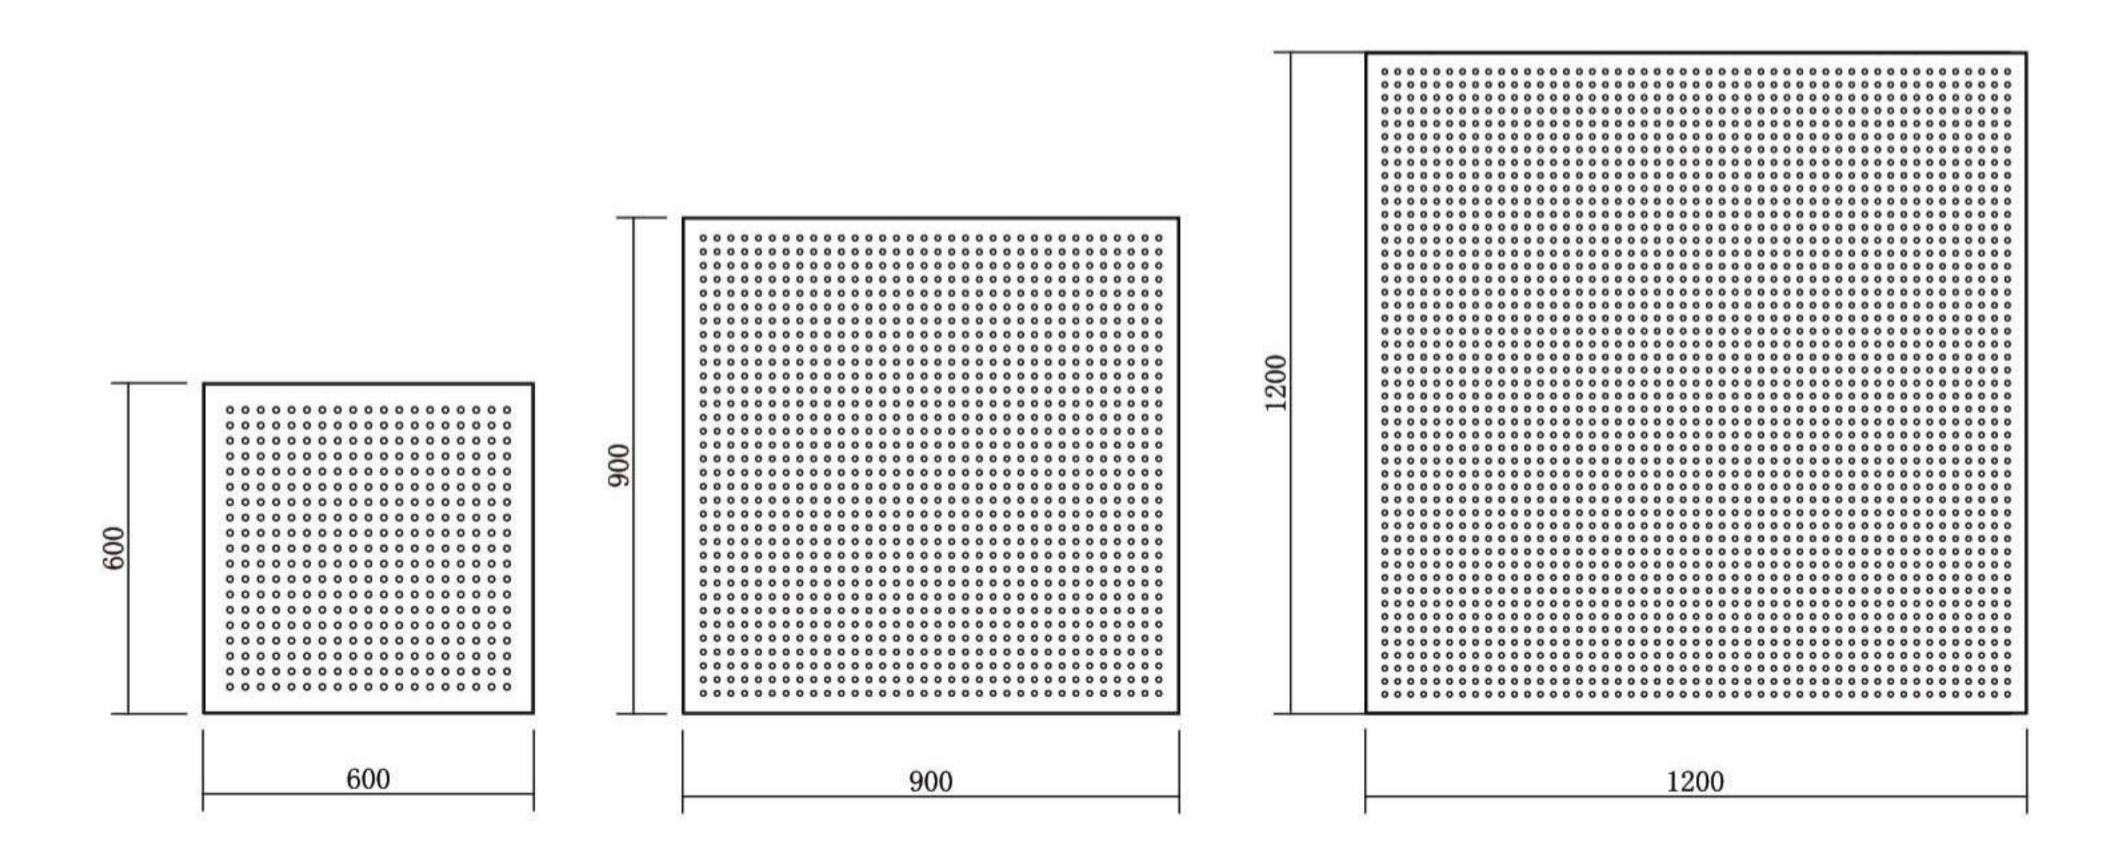


- Aluminium housingPowder coated to RAL of choice
- Various mounting options available
 Fully bespoke options available

Dimension	L600 x W600mm	L900 x W900mm	L1200 x W1200mm
Difficision	(23.6" x 23.6")	(35.43" x 35.43")	(47.24" x 47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	3 kg	6 kg	10 kg

ACOUSTIC RANGE Reference: AC 015



Acoustic only range. Fully adaptable to suit your requirements.

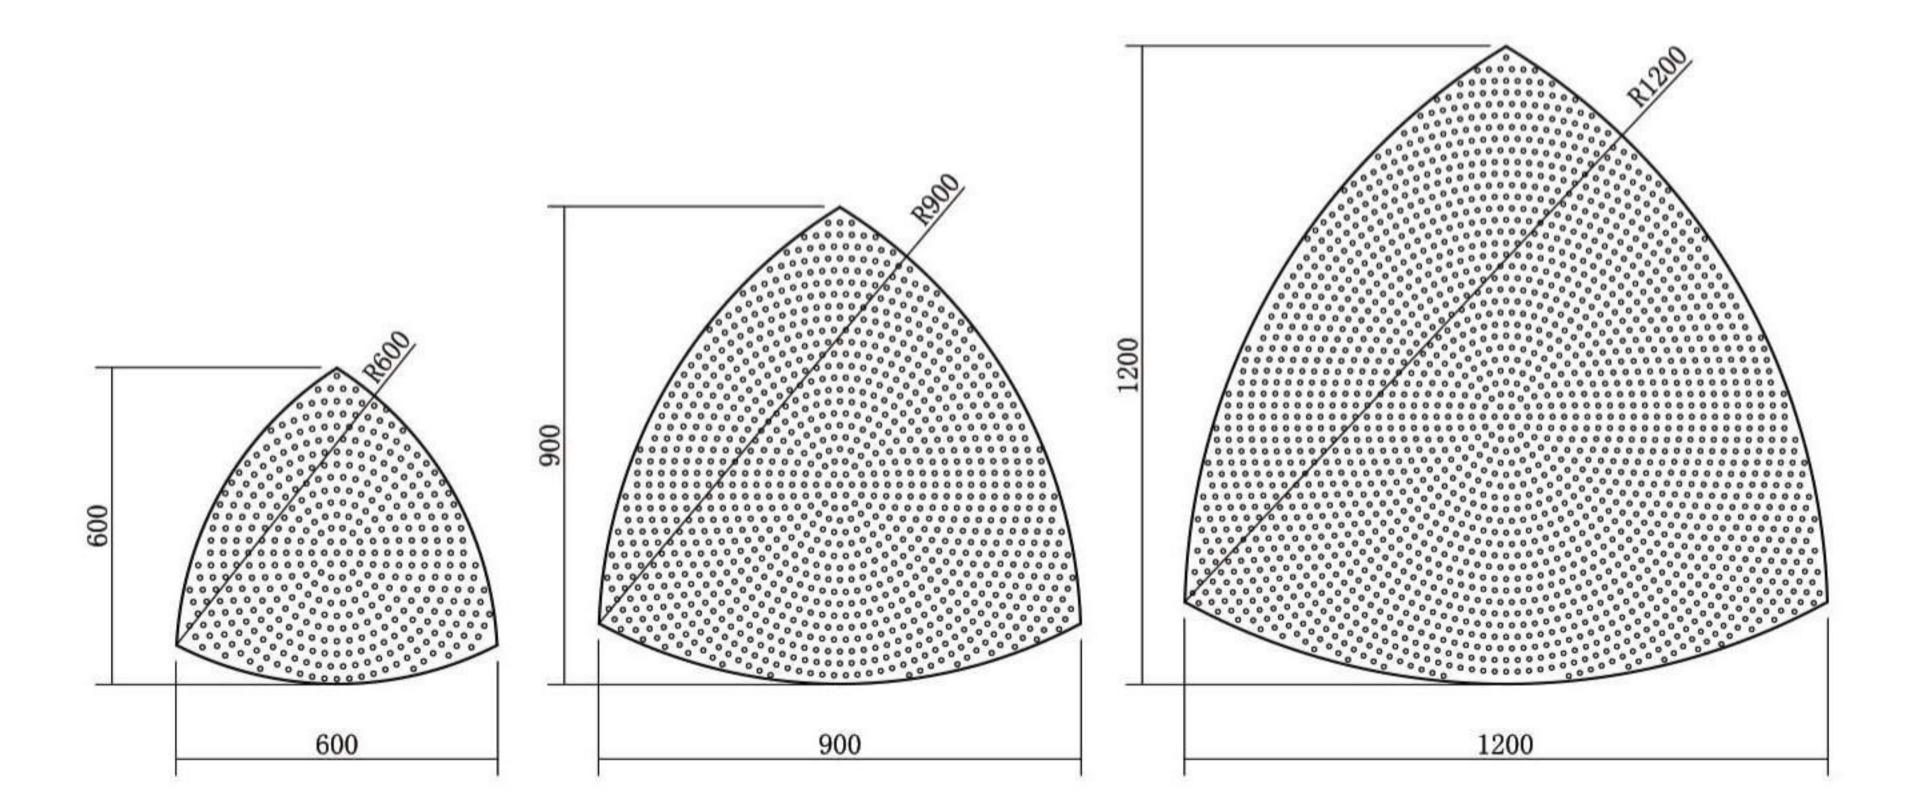

- Aluminium housing
 Powder coated to RAL of choice
- Various mounting options available
 Fully bespoke options available

Dimension	L600 x W600mm (23.6" x 23.6")	L900 x W900mm (35.43")	L1200 x W1200mm (47.24" x 47.24")
Luminaire Height	88 mm(3.46")		
Product Weight	2.5 kg	4.5 kg	7.5kg